

JOB No.: TCS00694/13

**AGREEMENT NO. CE 45/2008 (CE)
LIANTANG/HEUNG YUEN WAI
BOUNDARY CONTROL POINT AND ASSOCIATED WORKS**

**MONTHLY ENVIRONMENTAL MONITORING AND AUDIT
REPORT (NO.56) – MARCH 2018**

**PREPARED FOR
CIVIL ENGINEERING AND DEVELOPMENT DEPARTMENT
(CEDD)**

| Date | Reference No. | Prepared By | Certified By |
|---------------|-------------------------|--|--|
| 16 April 2018 | TCS00694/13/600/R1509v3 |  Nicola Hon (Environmental Consultant) |  Tam Tak Wing (Environmental Team Leader) |

| Version | Date | Remarks |
|----------------|---------------|---|
| 1 | 10 April 2018 | First Submission |
| 2 | 16 April 2018 | Amended according to the IEC's comment on 12 April 2018 |
| 3 | 16 April 2018 | Amended according to the IEC's comment on 16 April 2018 |



Member of the Surbana Jurong Group

local people
global experience

Our ref: 7076192/L22949/AB/AW/MCC/rw

17 April 2018

AECOM
8/F, Grand Central Plaza, Tower 2
138 Shatin Rural Committee Road
Shatin, N.T.

By Email & Post

Attention: Mr Simon LEUNG

Dear Sir

**Agreement No. CE 45/2008 (CE)
Liantang/Heung Yuen Wai Boundary Control Point and Associated Works
Independent Environmental Checker – Investigation
Monthly EM&A Report (No. 56) – March 2018**

With reference to the Monthly EM&A Report No. 56 for March 2018 (Version 3) certified by the ET Leader, please be noted that we have no adverse comments on the captioned submission. We herewith verify the captioned submission in accordance with Condition 5.4 of the Environmental Permit No. EP-404/2011/D.

Thank you for your attention and please do not hesitate to contact the undersigned on tel. 3995-8120 or by email to antony.wong@smec.com; or our Mr Arthur CHIU on tel. 3995-8144 or by email to arthur.chiu@smec.com.

Yours faithfully

Antony WONG
Independent Environmental Checker

| | | | | |
|----|-----------|---|----------------------------------|-------------------|
| cc | CEDD/BCP | - | Mr LU Pei Yu / Mr William CHEUNG | by fax: 3547 1659 |
| | ArchSD | - | Mr William WL CHENG | by fax: 2804 6805 |
| | AECOM | - | Mr Pat LAM / Mr Perry YAM | by email |
| | Ronald Lu | - | Mr Peter YAM / Mr Justin CHEUNG | by email |
| | CW | - | Mr Daniel HO | by email |
| | DHK | - | Mr Daniel ALTIER | by email |
| | CCKJV | - | Mr Vincent CHAN | by email |
| | KRSJV | - | Mr Matthew TSANG | by email |
| | Leighton | - | Mr Ray HO | by email |
| | Siemens | - | Mr Patrick LEUNG | by email |
| | AUES | - | Mr TW TAM | by email |

SMEC ASIA LIMITED
27/F Ford Glory Plaza
37-39 Wing Hong Street
Cheung Sha Wan, Kowloon, Hong Kong
T +852 3995 8100 F +852 3995 8101 E hongkong@smec.com
www.smec.com



EXECUTIVE SUMMARY

ES01 This is the 56th monthly EM&A report presenting the monitoring results and inspection findings for the reporting period from **1 to 31 March 2018** (hereinafter ‘the Reporting Period’).

ENVIRONMENTAL MONITORING AND AUDIT ACTIVITIES

ES02 To facilitate the project management and implementation, Liantang/Heung Yuen Wai Boundary Control Point and Associated Works of the Project is divided to seven CEDD contracts including Contract 2 (CV/2012/08), Contract 3 (CV/2012/09), Contract 4 (NE/2014/02), Contract 5 (CV/2013/03), Contract 6 (CV/2013/08) and Contract 7 (NE/2014/03) and an ArshSD contract (Contract SS C505).

ES03 In the Reporting Period, the major construction works under Liantang/Heung Yuen Wai Boundary Control Point and Associated Works of the Project included Contract 2, Contract 3, Contract 4, Contract 6, Contract 7 and Contract SS C505. Environmental monitoring activities under the EM&A programme in the Reporting Period are summarized in the following table.

| Environmental Aspect | Environmental Monitoring Parameters / Inspection | Reporting Period | |
|-------------------------------|--|---|----------------------------|
| | | Number of Monitoring Locations to undertake | Total Occasions |
| Air Quality | 1-hour TSP | 9 | 135 |
| | 24-hour TSP | 9 | 50 |
| Construction Noise | L _{eq(30min)} Daytime | 10 | 45 |
| Water Quality | Water in-situ measurement and/or sampling | WM1 & WM1-C | 14 Scheduled & 0 extra |
| | | WM2A(a) & WM2A-Cx | 14 Scheduled & 0 extra |
| | | WM2B & WM2B-C | 14 Scheduled & 0 extra (*) |
| | | WM3x & WM3-C | 14 Scheduled & 2 extra |
| | | WM4, WM4-CA & WM4-CB | 14 Scheduled & 0 extra |
| Ecology | Woodland compensation i) General Health condition of planted species ii) Survival of planted species | 9 Quadrats and transect | 0 |
| Joint Site Inspection / Audit | IEC, ET, the Contractor and RE joint site Environmental Inspection and Auditing | Contract 2 | 5 |
| | | Contract 3 | 5 |
| | | Contract 4 | 5 |
| | | Contract 6 | 5 |
| | | Contract 7 | 5 |
| | | Contract SS C505 (#) | 4 |

Remark:

(#) IEC only joined one (1) event of site inspection for Contract SS C505.

(*) In the whole Reporting Period, water sampling was unable to carry out at WM2B and WM2B-C due to shallow water (water depth under 150mm)

ACTION AND LIMIT (A/L) LEVELS EXCEEDANCE

ES04 In the Reporting Period, no air quality and construction noise exceedance and valid noise complaint was recorded. For water quality monitoring, a total of four (4) Limit Level exceedances were recorded under the Project. The summary of exceedance in the Reporting Period is shown below.

| Environmental Aspect | Monitoring Parameters | Action Level | Limit Level | Event & Action | | | |
|----------------------|-----------------------|--------------|-------------|----------------|----------------------|----------------------------|--------------------|
| | | | | NOE Issued | Investigation Result | Project related exceedance | Corrective Actions |
| Air Quality | 1-hour TSP | 0 | 0 | 0 | -- | -- | -- |
| | 24-hour TSP | 0 | 0 | 0 | -- | -- | -- |

| Environmental Aspect | Monitoring Parameters | Action Level | Limit Level | Event & Action | | | |
|----------------------|-------------------------|--------------|-------------|----------------|---|----------------------------|---|
| | | | | NOE Issued | Investigation Result | Project related exceedance | Corrective Actions |
| Construction Noise | $L_{eq(30min)}$ Daytime | 0 | 0 | 0 | -- | -- | -- |
| Water Quality | DO | 0 | 0 | 0 | - | -- | -- |
| | Turbidity | 0 | 2 | 2 | - All exceedances were not project related. | 0 | The Contractor should fully implement water quality mitigation measure. |
| | SS | 0 | 2 | 2 | | 0 | |

ES05 Investigation Report for all water quality exceedances was completed by ET. Investigation results revealed that the Contractor had properly implemented water quality mitigation measures such as well-maintained the wastewater treatment facility and covered the expose area with impervious sheet. It was concluded that all the exceedances were not related to the works under the Project. Nevertheless, the Contractor was reminded to fully implement the water quality mitigation measure throughout the constriction phase as far as practicable.

ENVIRONMENTAL COMPLAINT

ES06 In this Reporting Period, two (2) documented environmental complaints were received under the EM&A programme regarding to the dust and water quality issue on Sha Tau Kok Road and Lin Ma Hang Road. The investigation for the complaint was completed by ET. The IRs revealed that the conditions of all site exits under the Project were well maintained without mud and debris and no excessive water spraying and slurry was found on the complaint roads. Since there were many other heavy vehicles apart from the project using complaint roads and mitigation measures were properly implemented by the Contractor, it is considered that the complaints were not related to the works under the Project.

NOTIFICATION OF SUMMONS AND SUCCESSFUL PROSECUTIONS

ES07 No environmental summons and prosecutions were recorded in the Reporting Period.

REPORTING CHANGE

ES08 No reporting changes were made in the Reporting Period.

SITE INSPECTION

ES09 In this Reporting Period, joint site inspection to evaluate the site environmental performance at **Contract 2** has been carried out by the RE, IEC, ET and the Contractor on **1, 9, 16, 23 and 28 March 2018**. No non-compliance was noted during the site inspection.

ES10 In the Reporting Period, joint site inspection to evaluate the site environmental performance at **Contract 3** has been carried out by the RE, IEC, ET and the Contractor on **1, 8, 15, 21 and 29 March 2018**. No non-compliance was noted during the site inspection.

ES11 In the Reporting Period, joint site inspection to evaluate the site environmental performance at **Contract 4** has been carried out by the RE, IEC, ET and the Contractor on **2, 9, 16, 19 and 28 March 2018**. No non-compliance was noted.

ES12 In the Reporting Period, joint site inspection to evaluate the site environmental performance at **Contract 6** has been carried out by the RE, IEC, ET and the Contractor on **2, 8, 15, 22 and 29 March 2018**. No non-compliance was noted during the site inspection.

- ES13 In the Reporting Period, joint site inspection for **Contract 7** to evaluate the site environmental performance has been carried out by the RE, IEC, ET and the Contractor on **2, 9, 16, 22 and 28 March 2018**. No non-compliance was noted during the site inspection.
- ES14 In the Reporting Period, joint site inspection to evaluate the site environmental performance at **Contract SS C505** has been carried out by the RE, ET and the Contractor on **7, 14, 21 and 28 March 2018** in which IEC joined the site inspection on **28 March 2018**. No non-compliance was noted during the site inspection.

FUTURE KEY ISSUES

- ES15 As wet season is approaching, preventive measures for muddy water or other water pollutants from site surface flow to local stream such as Kong Yiu Channel, Ma Wat Channel, Ping Yuen River, Kwan Tei River or public area should be properly maintained. The Contractors should paid special attention on water quality mitigation measures and fully implement according ISEMM of the EM&A Manual, in particular for working areas near Ma Wat Channel and Ping Yuen River.
- ES16 In addition, all effluent discharge shall be ensure to fulfill Technical Memorandum of Effluent Discharged into Drainage and Sewerage Systems, inland and Coastal Waters criteria or discharge permits stipulation.
- ES17 Construction noise would be a key environmental issue during construction work of the Project. Noise mitigation measures such as using quiet plants should be implemented in accordance with the EM&A requirement.
- ES18 Since most of construction sites under the Project are located adjacent to villages, the Contractors should fully implement air quality mitigation measures to reduce construction dust emission.

Table of Contents

| | | |
|-----------|---|-----------|
| 1 | INTRODUCTION | 1 |
| 1.1 | PROJECT BACKGROUND | 1 |
| 1.2 | REPORT STRUCTURE | 1 |
| 2 | PROJECT ORGANIZATION AND CONSTRUCTION PROGRESS | 3 |
| 2.1 | CONSTRUCTION CONTRACT PACKAGING | 3 |
| 2.2 | PROJECT ORGANIZATION | 5 |
| 2.3 | CONCURRENT PROJECTS | 7 |
| 2.4 | CONSTRUCTION PROGRESS | 7 |
| 2.5 | SUMMARY OF ENVIRONMENTAL SUBMISSIONS | 9 |
| 3 | SUMMARY OF IMPACT MONITORING REQUIREMENTS | 14 |
| 3.1 | GENERAL | 14 |
| 3.2 | MONITORING PARAMETERS | 14 |
| 3.3 | MONITORING LOCATIONS | 14 |
| 3.4 | MONITORING FREQUENCY AND PERIOD | 16 |
| 3.5 | MONITORING EQUIPMENT | 17 |
| 3.6 | MONITORING METHODOLOGY | 19 |
| 3.7 | EQUIPMENT CALIBRATION | 21 |
| 3.8 | DERIVATION OF ACTION/LIMIT (A/L) LEVELS | 22 |
| 3.9 | DATA MANAGEMENT AND DATA QA/QC CONTROL | 22 |
| 4 | AIR QUALITY MONITORING | 24 |
| 4.1 | GENERAL | 24 |
| 4.2 | AIR QUALITY MONITORING RESULTS | 24 |
| 5 | CONSTRUCTION NOISE MONITORING | 27 |
| 5.1 | GENERAL | 27 |
| 5.2 | NOISE MONITORING RESULTS | 27 |
| 6 | WATER QUALITY MONITORING | 28 |
| 6.1 | GENERAL | 28 |
| 6.2 | RESULTS OF WATER QUALITY MONITORING | 28 |
| 7 | ECOLOGY MONITORING | 31 |
| 7.1 | GENERAL | 31 |
| 8 | WASTE MANAGEMENT | 32 |
| 8.1 | GENERAL WASTE MANAGEMENT | 32 |
| 8.2 | RECORDS OF WASTE QUANTITIES | 32 |
| 9 | SITE INSPECTION | 33 |
| 9.1 | REQUIREMENTS | 33 |
| 9.2 | FINDINGS / DEFICIENCIES DURING THE REPORTING MONTH | 33 |
| 10 | ENVIRONMENTAL COMPLAINT AND NON-COMPLIANCE | 37 |
| 10.1 | ENVIRONMENTAL COMPLAINT, SUMMONS AND PROSECUTIONS | 37 |
| 11 | IMPLEMENTATION STATUS OF MITIGATION MEASURES | 40 |
| 11.1 | GENERAL REQUIREMENTS | 40 |
| 11.2 | TENTATIVE CONSTRUCTION ACTIVITIES IN THE COMING MONTH | 40 |
| 11.3 | KEY ISSUES FOR THE COMING MONTH | 42 |
| 12 | CONCLUSIONS AND RECOMMENDATIONS | 43 |
| 12.1 | CONCLUSIONS | 43 |
| 12.2 | RECOMMENDATIONS | 43 |

LIST OF TABLES

| | |
|------------|--|
| TABLE 3-1 | SUMMARY OF EM&A REQUIREMENTS |
| TABLE 3-2 | IMPACT MONITORING STATIONS - AIR QUALITY |
| TABLE 3-3 | IMPACT MONITORING STATIONS - CONSTRUCTION NOISE |
| TABLE 3-4 | IMPACT MONITORING STATIONS - WATER QUALITY |
| TABLE 3-5 | AIR QUALITY MONITORING EQUIPMENT |
| TABLE 3-6 | CONSTRUCTION NOISE MONITORING EQUIPMENT |
| TABLE 3-7 | WATER QUALITY MONITORING EQUIPMENT |
| TABLE 3-8 | ACTION AND LIMIT LEVELS FOR AIR QUALITY MONITORING |
| TABLE 3-9 | ACTION AND LIMIT LEVELS FOR CONSTRUCTION NOISE |
| TABLE 3-10 | ACTION AND LIMIT LEVELS FOR WATER QUALITY |
| TABLE 4-1 | SUMMARY OF 24-HOUR AND 1-HOUR TSP MONITORING RESULTS – AM1A |
| TABLE 4-2 | SUMMARY OF 24-HOUR AND 1-HOUR TSP MONITORING RESULTS – AM2 |
| TABLE 4-3 | SUMMARY OF 24-HOUR AND 1-HOUR TSP MONITORING RESULTS – AM3 |
| TABLE 4-4 | SUMMARY OF 24-HOUR AND 1-HOUR TSP MONITORING RESULTS – AM4B |
| TABLE 4-5 | SUMMARY OF 24-HOUR AND 1-HOUR TSP MONITORING RESULTS – AM5A |
| TABLE 4-6 | SUMMARY OF 24-HOUR AND 1-HOUR TSP MONITORING RESULTS – AM6 |
| TABLE 4-7 | SUMMARY OF 24-HOUR AND 1-HOUR TSP MONITORING RESULTS – AM7A |
| TABLE 4-8 | SUMMARY OF 24-HOUR AND 1-HOUR TSP MONITORING RESULTS – AM8 |
| TABLE 4-9 | SUMMARY OF 24-HOUR AND 1-HOUR TSP MONITORING RESULTS – AM9B |
| TABLE 5-1 | SUMMARY OF CONSTRUCTION NOISE MONITORING RESULTS |
| TABLE 5-2 | SUMMARY OF CONSTRUCTION NOISE MONITORING RESULTS |
| TABLE 6-1 | SUMMARY OF WATER QUALITY MONITORING RESULTS FOR CONTRACT 2 AND 3 |
| TABLE 6-2 | SUMMARY OF WATER QUALITY MONITORING RESULTS FOR CONTRACT 6 AND SS C505 |
| TABLE 6-3 | SUMMARY OF WATER QUALITY MONITORING RESULTS FOR CONTRACT 6 |
| TABLE 6-4 | SUMMARY OF WATER QUALITY MONITORING RESULTS FOR CONTRACT 2 AND 6 |
| TABLE 6-5 | ACTION AND LIMIT (A/L) LEVELS EXCEEDANCE RECORDED |
| TABLE 8-1 | SUMMARY OF QUANTITIES OF INERT C&D MATERIALS |
| TABLE 8-2 | SUMMARY OF QUANTITIES OF C&D WASTES |
| TABLE 9-1 | SITE OBSERVATIONS FOR CONTRACT 2 |
| TABLE 9-2 | SITE OBSERVATIONS FOR CONTRACT 3 |
| TABLE 9-3 | SITE OBSERVATIONS FOR CONTRACT 4 |
| TABLE 9-4 | SITE OBSERVATIONS FOR CONTRACT 5 |
| TABLE 9-5 | SITE OBSERVATIONS FOR CONTRACT 6 |
| TABLE 9-6 | SITE OBSERVATIONS FOR CONTRACT SS C505 |
| TABLE 9-7 | SITE OBSERVATIONS FOR CONTRACT 7 |
| TABLE 10-1 | STATISTICAL SUMMARY OF ENVIRONMENTAL COMPLAINTS |
| TABLE 10-2 | STATISTICAL SUMMARY OF ENVIRONMENTAL SUMMONS |
| TABLE 10-3 | STATISTICAL SUMMARY OF ENVIRONMENTAL PROSECUTION |
| TABLE 11-1 | ENVIRONMENTAL MITIGATION MEASURES |

LIST OF APPENDICES

| | |
|------------|--|
| APPENDIX A | LAYOUT PLAN OF THE PROJECT |
| APPENDIX B | ORGANIZATION CHART |
| APPENDIX C | 3-MONTH ROLLING CONSTRUCTION PROGRAM |
| APPENDIX D | DESIGNATED MONITORING LOCATIONS AS RECOMMENDED IN THE APPROVED EM&A MANUAL |
| APPENDIX E | MONITORING LOCATIONS FOR IMPACT MONITORING |
| APPENDIX F | CALIBRATION CERTIFICATE OF MONITORING EQUIPMENT AND HOKLAS-ACCREDITATION CERTIFICATE OF THE TESTING LABORATORY |
| APPENDIX G | EVENT AND ACTION PLAN |
| APPENDIX H | IMPACT MONITORING SCHEDULE |
| APPENDIX I | DATABASE OF MONITORING RESULT |
| APPENDIX J | GRAPHICAL PLOTS FOR MONITORING RESULT |
| APPENDIX K | METEOROLOGICAL DATA |
| APPENDIX L | WASTE FLOW TABLE |
| APPENDIX M | IMPLEMENTATION SCHEDULE FOR ENVIRONMENTAL MITIGATION MEASURES |
| APPENDIX N | INVESTIGATION REPORT FOR EXCEEDANCE |
| APPENDIX O | INVESTIGATION REPORT FOR COMPLAINT |

1 INTRODUCTION

1.1 PROJECT BACKGROUND

- 1.1.1 Civil Engineering and Development Department is the Project Proponent and the Permit Holder of *Agreement No. CE 45/2008 (CE) Liantang / Heung Yuen Wai Boundary Control Point and Associated Works*, which is a Designated Project to be implemented under Environmental Permit number EP-404/2011/D granted on 20 January 2017.
- 1.1.2 The Project consists of two main components: Construction of a Boundary Control Point (hereinafter referred as “BCP”); and Construction of a connecting road alignment. Layout plan of the Project is shown in *Appendix A*.
- 1.1.3 The proposed BCP is located at the boundary with Shenzhen near the existing Chuk Yuen Village, comprising a main passenger building with passenger and cargo processing facilities and the associated customs, transport and ancillary facilities. The connecting road alignment consists of six main sections:
- 1) Lin Ma Hang to Frontier Closed Area (FCA) Boundary – this section comprises at-grade and viaducts and includes the improvement works at Lin Ma Hang Road;
 - 2) Ping Yeung to Wo Keng Shan – this section stretches from the Frontier Closed Area Boundary to the tunnel portal at Cheung Shan and comprises at-grade and viaducts including an interchange at Ping Yeung;
 - 3) North Tunnel – this section comprises the tunnel segment at Cheung Shan and includes a ventilation building at the portals on either end of the tunnel;
 - 4) Sha Tau Kok Road – this section stretches from the tunnel portal at Wo Keng Shan to the tunnel portal south of Loi Tung and comprises at-grade and viaducts including an interchange at Sha Tau Kok and an administration building;
 - 5) South Tunnel – this section comprises a tunnel segment that stretches from Loi Tung to Fanling and includes a ventilation building at the portals on either end of the tunnel as well as a ventilation building in the middle of the tunnel near Lau Shui Heung;
 - 6) Fanling – this section comprises the at-grade, viaducts and interchange connection to the existing Fanling Highway.
- 1.1.4 Action-United Environmental Services & Consulting has been commissioned as an Independent ET to implement the relevant EM&A program in accordance with the approved EM&A Manual, as well as the associated duties. As part of the EM&A program, the baseline monitoring has carried out between **13 June 2013** and **12 July 2013** for all parameters including air quality, noise and water quality before construction work commencement. The Baseline Monitoring Report summarized the key findings and the rationale behind determining a set of Action and Limit Levels (A/L Levels) from the baseline data. Also, the Project baseline monitoring report which verified by the IEC has been submitted to EPD on **16 July 2013** for endorsement. The major construction works of the Project was commenced on **16 August 2013** in accordance with the EP Section 5.3 stipulation.
- 1.1.5 This is **56th** monthly EM&A report presenting the monitoring results and inspection findings for reporting period from **1 to 31 March 2018**.

1.2 REPORT STRUCTURE

- 1.2.1 The Monthly Environmental Monitoring and Audit (EM&A) Report is structured into the following sections:-
- | | |
|------------------|---|
| Section 1 | <i>Introduction</i> |
| Section 2 | <i>Project Organization and Construction Progress</i> |
| Section 3 | <i>Summary of Impact Monitoring Requirements</i> |
| Section 4 | <i>Air Quality Monitoring</i> |
| Section 5 | <i>Construction Noise Monitoring</i> |
| Section 6 | <i>Water Quality Monitoring</i> |

| | |
|-------------------|---|
| Section 7 | <i>Ecology Monitoring</i> |
| Section 8 | <i>Waste Management</i> |
| Section 9 | <i>Site Inspections</i> |
| Section 10 | <i>Environmental Complaints and Non-Compliance</i> |
| Section 11 | <i>Implementation Status of Mitigation Measures</i> |
| Section 12 | <i>Conclusions and Recommendations</i> |

2 PROJECT ORGANIZATION AND CONSTRUCTION PROGRESS

2.1 CONSTRUCTION CONTRACT PACKAGING

2.1.1 To facilitate the project management and implementation, the Project would be divided by the following contracts:

- Contract 2 (CV/2012/08)
- Contract 3 (CV/2012/09)
- Contract 4 (NE/2014/02)
- Contract 5 (CV/2013/03)
- Contract 6 (CV/2013/08)
- Contract 7 (NE/2014/03)
- ArchSD Contract No. SS C505

2.1.2 The details of each contracts is summarized below and the delineation of each contracts is shown in *Appendix A*.

Contract 2 (CV/2012/08)

2.1.3 Contract 2 has awarded in December 2013 and construction work was commenced on 19 May 2014. Major Scope of Work of the Contract 2 is listed below:

- construction of an approximately 5.2km long dual two-lane connecting road (with about 0.4km of at-grade road and 4.8km of tunnel) connecting the Fanling Interchange with the proposed Sha Tau Kok Interchange;
- construction of a ventilation adit tunnel and the mid-ventilation building;
- construction of the north and south portal buildings of the Lung Shan Tunnel and their associated slope works;
- provision and installation of ventilation system, E&M works and building services works for Lung Shan tunnel and Cheung Shan tunnel and their portal buildings;
- construction of Tunnel Administration Building adjacent to Wo Keng Shan Road and the associated E&M and building services works; and
- construction of associated footpath, slopes, retaining structures, drainage, sewerage, waterworks, landscaping works and other ancillary works.

Contract 3 (CV/2012/09)

2.1.4 Contract 3 was awarded in July 2013 and construction work was commenced on 5 November 2013. Major Scope of Work of the Contract 3 is listed below:

- construction of four link roads connecting the existing Fanling Highway and the south portal of the Lung Shan Tunnel;
- realignment of the existing Tai Wo Service Road West and Tai Wo Service Road East;
- widening of the existing Fanling Highway (HyD's entrustment works);
- demolishing existing Kiu Tau vehicular bridge and Kiu Tau footbridge and reconstruction of the existing Kiu Tau Footbridge (HyD's entrustment works); and
- construction of associated footpath, slopes, retaining structures, drainage, sewerage, waterworks, landscaping works and other ancillary works.

Contract 4 (NE/2014/02)

2.1.5 Contract 4 has awarded in mid-April 2016 and construction work was commenced on 2 May 2017. The scope of work of the Contract 4 includes:

- design, supply, delivery, installation, testing and commissioning of a traffic control and surveillance system for the connecting road linking up the Liantang / Heung Yuen Wai Boundary Control Point and the existing Fanling Highway.

Contract 5 (CV/2013/03)

- 2.1.6 Contract 5 has awarded in April 2013 and construction work was commenced in August 2013. Major Scope of Work of the Contract 5 is listed below:
- site formation of about 23 hectares of land for the development of the BCP;
 - construction of an approximately 1.6 km long perimeter road at the BCP including a 175m long depressed road;
 - associated diversion/modification works at existing local roads and junctions including Lin Ma Hang Road;
 - construction of pedestrian subway linking the BCP to Lin Ma Hang Road;
 - provision of resite area with supporting infrastructure for reprovisioning of the affected village houses; and
 - construction of associated footpath, slopes, retaining structures, drainage, sewerage, waterworks, landscaping works and other ancillary works.

Contract 6 (CV/2013/08)

- 2.1.7 Contract 6 has awarded in June 2015 and construction work was commenced on 23 October 2015. Major Scope of Work of the Contract 6 would be included below:
- construction of an approximately 4.6km long dual two-lane connecting road (with about 0.6km of at-grade road, 3.3km of viaduct and 0.7km of tunnel) connecting the BCP with the proposed Sha Tau Kok Road Interchange and the associated ventilation buildings;
 - associated diversion/modification works at access roads to the resite of Chuk Yuen Village;
 - provision of sewage collection, treatment and disposal facilities for the BCP and the resite of Chuk Yuen Village;
 - construction of a pedestrian subway linking the BCP to Lin Ma Hang Road;
 - provisioning of the affected facilities including Wo Keng Shan Road garden; and
 - construction of associated footpath, slopes, retaining structures, drainage, sewerage, waterworks, landscaping works and other ancillary works.

Contract 7 (NE/2014/03)

- 2.1.8 Contract 7 has awarded in December 2015 and the construction works of Contract 7 was commenced on 15 February 2016. Major Scope of Work of the Contract 7 would be included below:
- construction of the Hong Kong Special Administrative Region (HKSAR) portion of four vehicular bridge
 - construction of one pedestrian bridge crossing Shenzhen (SZ) River (cross boundary bridges)

ArchSD Contract No. SS C505

- 2.1.9 SS C505 has awarded in July 2015 and construction work was commenced on 1 September 2015. Major Scope of Work of the SS C505 would be included below:
- passenger-related facilities including processing kiosks and examination facilities for private cars and coaches, passenger clearance building and halls, the interior fitting works for the pedestrian bridge crossing Shenzhen River, etc.;
 - cargo processing facilities including kiosks for clearance of goods vehicles, customs inspection platforms, X-ray building, etc.;
 - accommodation for the facilities inside of the Government departments providing services in connection with the BCP;
 - transport-related facilities inside the BCP including road networks, public transport interchange, transport drop-off and pick-up areas, vehicle holding areas and associated road furniture etc;
 - a public carpark; and

- other ancillary facilities such as sewerage and drainage, building services provisions and electronic systems, associated environmental mitigation measure and landscape works.

2.2 PROJECT ORGANIZATION

2.2.1 The project organization is shown in *Appendix B*. The responsibilities of respective parties are:

Civil Engineering and Development Department (CEDD)

2.2.2 CEDD is the Project Proponent and the Permit Holder of the EP of the development of the Project and will assume overall responsibility for the project. An Independent Environmental Checker (IEC) shall be employed by CEDD to audit the results of the EM&A works carried out by the ET.

Architectural Services Department (ArchSD)

2.2.3 ArchSD acts as the works agent for Development Bureau (DEVB), for Contract SS C505 Liantang/ Heung Yuen Wai Boundary Control Point (BCP) – BCP Buildings and Associated Facilities.

Environmental Protection Department (EPD)

2.2.4 EPD is the statutory enforcement body for environmental protection matters in Hong Kong.

Ronald Lu & Partners (Hong Kong) Ltd (The Architect)

2.2.5 Ronald Lu & Partners (Hong Kong) Ltd is appointed by ArchSD as an Architect for Contract SS C505 Liantang/ Heung Yuen Wai Boundary Control Point (BCP) – BCP Buildings and Associated Facilities. It responsible for overseeing the construction works of Contract SS C505 and for ensuring that the works are undertaken by the Contractor in accordance with the specification and contract requirements. The duties and responsibilities of the Architect with respect to EM&A are:

- Monitor the Contractors' compliance with contract specifications, including the implementation and operation of the environmental mitigation measures and their effectiveness
- Monitor Contractors' and ET's compliance with the requirements in the Environmental Permit (EP) and EM&A Manual
- Facilitate ET's implementation of the EM&A programme
- Participate in joint site inspection by the ET and IEC
- Oversee the implementation of the agreed Event / Action Plan in the event of any exceedance
- Adhere to the procedures for carrying out complaint investigation
- Liaison with DSD, Engineer/Engineer's Representative, ET, IEC and the Contractor of the "Construction of the DSD's Regulation of Shenzhen River Stage 4 (RSR 4)" Project discussing regarding the cumulative impact issues.

Engineer or Engineers Representative (ER)

2.2.6 The ER is responsible for overseeing the construction works and for ensuring that the works are undertaken by the Contractor in accordance with the specification and contract requirements. The duties and responsibilities of the ER with respect to EM&A are:

- Monitor the Contractors' compliance with contract specifications, including the implementation and operation of the environmental mitigation measures and their effectiveness
- Monitor Contractors's, ET's and IEC's compliance with the requirements in the Environmental Permit (EP) and EM&A Manual
- Facilitate ET's implementation of the EM&A programme
- Participate in joint site inspection by the ET and IEC
- Oversee the implementation of the agreed Event / Action Plan in the event of any exceedance

- Adhere to the procedures for carrying out complaint investigation
- Liaison with DSD, Engineer/Engineer's Representative, ET, IEC and the Contractor of the "Construction of the DSD's Regulation of Shenzhen River Stage 4 (RSR 4)" Project discussing regarding the cumulative impact issues.

The Contractor(s)

- 2.2.7 There will be one contractor for each individual works contract. Once the contractors are appointed, EPD, ET and IEC will be notified the details of the contractor.
- 2.2.8 The Contractor for Contracts under CEDD should report to the ER. For ArchSD Contract, the Contractor should report to the Architect or Architect's Representative (AR). The duties and responsibilities of the Contractor are:
- Comply with the relevant contract conditions and specifications on environmental protection
 - Employ an Environmental Team (ET) to undertake monitoring, laboratory analysis and reporting of EM & A Facilitate ET's monitoring and site inspection activities
 - Participate in the site inspections by the ET and IEC, and undertake any corrective actions
 - Provide information / advice to the ET regarding works programme and activities which may contribute to the generation of adverse environmental impacts
 - Submit proposals on mitigation measures in case of exceedances of Action and Limit levels in accordance with the Event / Action Plans
 - Implement measures to reduce impact where Action and Limit levels are exceeded
 - Adhere to the procedures for carrying out complaint investigation

Environmental Team (ET)

- 2.2.9 Once the ET is appointed, the EPD, CEDD, ER, Architect and IEC will be notified the details of the ET.
- 2.2.10 The ET shall not be in any way an associated body of the Contractor(s), and shall be employed by the Project Proponent/Contractor to conduct the EM&A programme. The ET should be managed by the ET Leader. The ET Leader shall be a person who has at least 7 years' experience in EM&A and has relevant professional qualifications. Suitably qualified staff should be included in the ET, and resources for the implementation of the EM&A programme should be allocated in time under the Contract(s), to enable fulfillment of the Project's EM&A requirements as specified in the EM&A Manual during construction of the Project. The ET shall report to the Project Proponent and the duties shall include:
- Monitor and audit various environmental parameters as required in this EM&A Manual
 - Analyse the environmental monitoring and audit data, review the success of EM&A programme and the adequacy of mitigation measures implemented, confirm the validity of the EIA predictions and identify any adverse environmental impacts arising
 - Carry out regular site inspection to investigate and audit the Contractors' site practice, equipment/plant and work methodologies with respect to pollution control and environmental mitigation, and effect proactive action to pre-empt problems
 - Monitor compliance with conditions in the EP, environmental protection, pollution prevention and control regulations and contract specifications
 - Audit environmental conditions on site
 - Report on the environmental monitoring and audit results to EPD, the ER, the Architect, the IEC and Contractor or their delegated representatives
 - Recommend suitable mitigation measures to the Contractor in the case of exceedance of Action and Limit levels in accordance with the Event and Action Plans
 - Liaise with the IEC on all environmental performance matters and timely submit all relevant EM&A proforma for approval by IEC
 - Advise the Contractor(s) on environmental improvement, awareness, enhancement measures etc., on site
 - Adhere to the procedures for carrying out complaint investigation

- Liaison with the client departments, Engineer/Engineer's Representative, ET, IEC and the Contractor(s) of the concurrent projects as listed under Section 2.3 below regarding the cumulative impact issues.

Independent Environmental Checker (IEC)

- 2.2.11 One IEC will be employed for this Project. Once the IEC is appointed, EPD, ER, the Architect and ET will be notified the details of the IEC.
- 2.2.12 The Independent Environmental Checker (IEC) should not be in any way an associated body of the Contractor or the ET for the Project. The IEC should be employed by the Permit Holder (i.e., CEDD) prior to the commencement of the construction of the Project. The IEC should have at least 10 years' experience in EM&A and have relevant professional qualifications. The appointment of IEC should be subject to the approval of EPD. The IEC should:
- Provide proactive advice to the ER and the Project Proponent on EM&A matters related to the project, independent from the management of construction works, but empowered to audit the environmental performance of construction
 - Review and audit all aspects of the EM&A programme implemented by the ET
 - Review and verify the monitoring data and all submissions in connection with the EP and EM&A Manual submitted by the ET
 - Arrange and conduct regular, at least monthly site inspections of the works during construction phase, and ad hoc inspections if significant environmental problems are identified
 - Check compliance with the agreed Event / Action Plan in the event of any exceedance
 - Check compliance with the procedures for carrying out complaint investigation
 - Check the effectiveness of corrective measures
 - Feedback audit results to ET by signing off relevant EM&A proforma
 - Check that the mitigation measures are effectively implemented
 - Verify the log-book(s) mentioned in Condition 2.2 of the EP, notify the Director by fax, within one working day of receipt of notification from the ET Leader of each and every occurrence, change of circumstances or non-compliance with the EIA Report and/or the EP, which might affect the monitoring or control of adverse environmental impacts from the Project
 - Report the works conducted, the findings, recommendation and improvement of the site inspections, after reviewing ET's and Contractor's works, and advices to the ER and Project Proponent on a monthly basis
 - Liaison with the client departments, Engineer/Engineer's Representative, the Architect, ET, IEC and the Contractor of the concurrent projects as listed under Section 2.3 below regarding the cumulative impact issues.

2.3 CONCURRENT PROJECTS

- 2.3.1 The concurrent construction works that may be carried out include, but not limited to, the following:
- (a) Regulation of Shenzhen River Stage IV;
 - (b) Widening of Fanling Highway – Tai Hang to Wo Hop Shek Interchange – Contract No. HY/2012/06;
 - (c) Construction of BCP facilities in Shenzhen.

2.4 CONSTRUCTION PROGRESS

- 2.4.1 In the Reporting Period, the major construction activity conducted under the Project is located in Contracts 2, 3, 6, 7 and SS C505 and they are summarized in below. Moreover, 3-month rolling construction program for all the current contracts is enclosed in **Appendix C**.

Contract 2 (CV/2012/08)

2.4.2 The contract commenced in May 2014. In this Reporting Period, construction activities conducted are listed below:

| | |
|-----------------|---|
| Mid-Vent Portal | <ul style="list-style-type: none"> • Cavern internal structure and tunnel E&M activities • Construction of C&C structure and permanent drainage • Structure connecting adit and ventilation building • Ventilation building superstructure and backfilling activities • Ventilation building fitting out and E&M installation |
| North Portal | <ul style="list-style-type: none"> • Southbound and Northbound tunnel waterproofing and lining • Construction of cross passage and internal structure • Tunnel backfilling and E&M installation • Tunnel Boring Machine (TBM) North drive excavation and mucking out • North ventilation building structure and internal structure • Construction of retaining wall and permanent drainage • Site formation and construction of slip road • Cleansing on existing drainage system • Construction of temporary utility bridge across the mid-platform |
| South Portal | <ul style="list-style-type: none"> • Tunnel waterproofing, lining and backfilling. • Tunnel internal structure and cross passage • Construction of retaining wall and backfilling activities • South ventilation building external wall finishing, fitting out and E&M installations |
| Admin Building | <ul style="list-style-type: none"> • Construction of fence wall and permanent drainage • Admin building fitting out, underground utilities and E&M installation • Construction of building permanent access. |

Contract 3 (CV/2012/09)

2.4.3 The Contract commenced in November 2013. In this Reporting Period, construction activities conducted are listed below:

- Cable Detection and Trial Trenches
- Remaining Works on New Kiu Tau Footbridge
- Noise Barrier Construction
- Road pavement works
- Demolition of Existing Kiu Tau Vehicular Bridge
- Water main laying works (on Grade and on bridge deck)
- Installation of Noise barrier steel column & panel, and sign gantry
- Parapet Installation on bridge deck
- Road Drainage Work
- Construction of Profile Barrier & Planter Wall on Bridge Deck
- Stressing of External Tendon
- Bitumen paving on bridge deck
- Installation of deck cell inside the bridge deck
- Installation of movement joint on the bridge
- Construction of Retaining Wall Behind Abutment
- Landscaping works

Contract 4 (NE/2014/02)

2.4.4 The Contract was awarded in mid-April 2016 and the construction work was commenced on 2 May 2017. In this Reporting Period, construction activities conducted are listed below:

- System design and testing
- E&M installation at Admin Building
- E&M installation at Ventilation Building
- High mast erection

- E&M installation at OHVD in tunnel

Contract 5 (CV/2013/03)

2.4.5 The construction works under Contract 5 was substantially completed on 31 August 2016.

Contract 6 (CV/2013/08)

2.4.6 Contract 6 has awarded in June 2015 and construction work was commenced on 23 October 2015. In this Reporting Period, construction activities conducted are listed below:

- Bridge construction
- Tunneling Works
- Sewage Treatment Plant Construction
- Tunnel Ventilation Building Construction
- Slip Road/At-grade Road/Periphery Road Construction

Contract 7 (NE/2014/03)

2.4.7 Contract 7 has awarded in December 2015 and construction work was commenced on 15 February 2016. In this Reporting Period, construction activities conducted are listed below:

- Deck construction at Bridge A
- Column and deck construction at Bridge E
- Profile barrier construction at Bridges D & E
- Installation of Façade at Bridge C
- Installation of BMU at roof of Bridge C

Contract SS C505

2.4.8 Contract SS C505 has awarded in July 2015 and construction work was commenced on 1 September 2015. In this Reporting Period, construction activities conducted are listed below:

- Building no. 1, 2, 3, 4, 5, 6, 7, 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 21, 22, 23, 24, 25, 26, 27, 28, 29, 30, 31 and 41 constructions
- Constructions of Steel Canopies (Building no. 32, 33, 34 and 35)
- Constructions of Master Water Meter Room 1, 2 and 3 (Building no. 42, 43, 44)
- Tower crane operation
- Bridge 1 - 5 construction works including retaining wall, road and finishes works
- Underground drainage works, Road Works, CLP Cable laying and Landscaping
- Formwork and falsework for PTB's slab and internal wall construction
- Construction PTB M/F, 1/F, 2/F and Roof flat slab
- Construction PTB non-structural wall, Underground Drainage and Utilities, Fence Wall, Southern Entrance Construction
- Backfilling works
- PTB Major Plant Rooms ABWF & MEP Installation, Lift and Escalator Installation by NSC
- Integrated ABWF & MEP Works in PTB, Building no. 1, 2, 3, 4, 5, 6, 7, 11, 14, 18, 36 and 41
- Elevated Walkway E1, E2, E3 and E4 construction
- Tower Crane Dismantling Works

2.5 SUMMARY OF ENVIRONMENTAL SUBMISSIONS

2.5.1 In according to the EP, the required documents have submitted to EPD which listed in below:

- Project Layout Plans of Contracts 2, 3, 4, 5, 6, 7 and SS C505
- Landscape Plan
- Topsoil Management Plan
- Environmental Monitoring and Audit Programme
- Baseline Monitoring Report (TCS00690/13/600/R0030v3) for the Project
- Waste Management Plan of the Contracts 2, 3, 4, 5, 6, 7 and SS C505
- Contamination Assessment Plan (CAP) and Contamination Assessment Report (CAR) for Po Kat Tsai, Loi Tung and the workshops in Fanling

- Vegetation Survey Report
- Woodland Compensation Plan
- Habitat Creation Management Plan
- Wetland Compensation Plan

2.5.2 Summary of the relevant permits, licenses, and/or notifications on environmental protection for the Project of each contracts are presented in *Table 2-1*.

Table 2-1 Status of Environmental Licenses and Permits of the Contracts

| Item | Description | License/Permit Status | | | |
|-------------------|--|---|----------------|--------------------|-------------|
| | | Ref. no. | Effective Date | Expiry Date | |
| Contract 2 | | | | | |
| 1 | Air pollution Control (Construction Dust) Regulation | Ref No.: 368864 | 31 Dec 2013 | Till Contract ends | |
| 2 | Chemical Waste Producer Registration | <i>North Portal</i> Waste Producers Number: No.5213-652-D2523-01 | 25 Mar 2014 | Till Contract ends | |
| | | <i>Mid-Vent Portal</i> Waste Producers Number: No.5213-634-D2524-01 | 25 Mar 2014 | Till Contract ends | |
| | | <i>South Portal</i> Waste Producers Number: No.5213-634-D2526-01 | 9 Apr 2014 | Till Contract ends | |
| 3 | Water Pollution Control Ordinance - Discharge License | No.WT00018374-2014 (South Portal) | 3 Mar 2014 | 28 Feb 2019 | |
| | | No. WT00023063-2015 (North Portal) | 18 Dec 2015 | 31 Mar 2019 | |
| | | No.: W5/11392 (Admin Building) | 28 Mar 2014 | 31 Mar 2019 | |
| | | No.: WT00025594-2016 (Mid-Vent Portal) | 7 Oct 2016 | 31 Mar 2019 | |
| 4 | Waste Disposal Regulation - Billing Account for Disposal of Construction Waste | Account No. 7019105 | 8 Jan 2014 | Till Contract ends | |
| 5 | Construction Noise Permit | GW-RN0744-17 | North Portal | 15-Nov-2017 | 09-May-2018 |
| | | GW-RN0747-17 | | 15-Nov-2017 | 09-May-2018 |
| | | GW-RN0839-17 | | 25-Dec-2017 | 17-Jun-2018 |
| | | GW-RN0047-18 | Mid Vent | 05-Feb-2018 | 01-Aug-2018 |
| | | GW-RN0049-18 | | 05-Feb-2017 | 31-Jul-2018 |
| | | GW-RN0765-17 | South Portal | 01-Dec-2017 | 31-May-2018 |
| | | GW-RN0601-17 | | 27-Sep-2017 | 21-Mar-2018 |
| | | GW-RN0673-17 | | 28-Oct-2017 | 27-Apr-2018 |
| | | GW-RN0788-17 | Admin | 06-Dec-2017 | 05-Jun-2018 |
| GW-RN0604-17 | 20-Sep-2017 | 16-Mar-2018 | | | |

| Item | Description | License/Permit Status | | | |
|-------------------|--|---|--------------------|----------------|--------------------------|
| | | Ref. no. | | Effective Date | Expiry Date |
| | | GW-RN0142-18 | Bldg | 5-Apr-2018 | 27-Sep-2018 |
| | | GW-RN0140-18 | Cheung Shan Tunnel | 3-Apr-2018 | 22-Sep-2018 |
| 6 | Specified Process License (Mortar Plant Operation) | L-3-251(1) | | 12 Apr 2016 | 11 Apr 2021 |
| Contract 3 | | | | | |
| 1 | Air pollution Control (Construction Dust) Regulation | Ref. No: 362101 | | 17 Jul 2013 | Till Contract ends |
| 2 | Chemical Waste Producer Registration | Waste Producers Number: No.:5113-634-C3817-01 | | 7 Oct 2013 | Till Contract ends |
| 3 | Water Pollution Control Ordinance - Discharge License | No.:WT00016832 – 2013 | | 28 Aug 13 | 31 Aug 2018 |
| 4 | Waste Disposal Regulation - Billing Account for Disposal of Construction Waste | Account No. 7017914 | | 2 Aug 13 | Till Contract ends |
| 5 | Construction Noise Permit | GW-RN0549-17 | | 6 Sep 2017 | 5 Mar 2018 |
| | | GW-RN0564-17 | | 1 Oct 2017 | 31 Mar 2018 |
| | | GW-RN0571-17 | | 30 Sep 2017 | 29 Mar 2018 |
| | | GW-RN0669-17 | | 25 Oct 2017 | 7 Apr 2018 |
| | | GW-RN0697-17 (cancelled on 14 Mar 2018) | | 21 Nov 2017 | cancelled on 14 Mar 2018 |
| | | GW-RN0721-17 | | 26 Nov 2017 | 20 May 2018 |
| | | GW-RN0782-17 | | 8 Dec 2017 | 26 May 2018 |
| | | GW-RN0785-17 | | 19 Dec 2017 | 16 Jun 2018 |
| | | GW-RN0786-17 | | 24 Dec 2017 | 18 Jun 2018 |
| | | GW-RN0801-17 | | 22 Dec 2017 | 21 Jun 2018 |
| | | GW-RN0863-17 | | 17 Jan 2018 | 5 Jul 2018 |
| | | GW-RN0043-18 | | 25 Feb 2018 | 24 Aug 2018 |
| | | GW-RN0044-18 | | 22 Feb 2018 | 21 Aug 2018 |
| GW-RN0102-18 | | 14 Mar 2018 | 31 Aug 2018 | | |
| GW-RN0123-18 | | 28 Mar 2018 | 5 Sep 2018 | | |
| Contract 5 | | | | | |
| 1 | Air pollution Control (Construction Dust) Regulation | Ref. No: 359338 | | 13 May 2013 | Till the end of Contract |
| 2 | Chemical Waste Producer | Waste Producers Number No.: 5213-642-S3735-01 | | 8 Jun 2013 | Till the end of Contract |

| Item | Description | License/Permit Status | | |
|-------------------------|--|---|----------------|--------------------------|
| | | Ref. no. | Effective Date | Expiry Date |
| | Registration | | | |
| 3 | Water Pollution Control Ordinance - Discharge License | No.: W5/1G44/1 | 8 Jun 13 | 30 Jun 2018 |
| 4 | Waste Disposal Regulation - Billing Account for Disposal of Construction Waste | Account No. 7017351 | 29 Apr 13 | Till the end of Contract |
| Contract 6 | | | | |
| 1 | Air pollution Control (Construction Dust) Regulation | Ref. No: 390614 | 29 Jun 2015 | Till the end of Contract |
| 2 | Chemical Waste Producer Registration | Waste Producers Number No.: 5213-652-C3969-01 | 31 Aug 2015 | Till the end of Contract |
| 3 | Waste Disposal Regulation - Billing Account for Disposal of Construction Waste | Account No. 7022707 | 9 Jul 2015 | Till the end of Contract |
| 4 | Water Pollution Control Ordinance - Discharge License | No.:WT00024574-2016 | 31 May 2016 | 31 May 2021 |
| | | No.:WT00024576-2016 | 31 May 2016 | 31 May 2021 |
| | | No.:WT00024742-2016 | 14 June 2016 | 30 June 2021 |
| | | No.:WT00024746-2016 | 14 June 2016 | 30 June 2021 |
| 5 | Construction Noise Permit | GW-RW0598-17 | 18 Sep 2017 | 17 Mar 2018 |
| | | GW-RW0684-17 | 30 Oct 2017 | 29 Apr 2018 |
| | | GW-RW0668-17 | 16 Jan 2018 | 15 Jul 2018 |
| | | GW-RW0086-18 | 1 Mar 2018 | 31 Aug 2018 |
| | | GW-RW0127-18 | 25 Mar 2018 | 27 May 2018 |
| Contract SS C505 | | | | |
| 1 | Air pollution Control (Construction Dust) Regulation | Ref. No: 390974 | 13 Jul 2015 | Till the end of Contract |
| 2 | Chemical Waste Producer Registration | Waste Producer No.: 5213-642-L1048-07 | 16 Sep 2015 | Till the end of Contract |
| 3 | Water Pollution Control Ordinance - Discharge License | No.: WT00024865-2016 | 8 Jul 2016 | 30 Nov 2020 |
| 4 | Waste Disposal Regulation - Billing Account for Disposal of | Account No. 7022831 | 23 Jul 2015 | Till the end of Contract |

| Item | Description | License/Permit Status | | |
|-------------------|--|---------------------------------------|----------------|--------------------------|
| | | Ref. no. | Effective Date | Expiry Date |
| | Construction Waste | | | |
| 5 | Construction Noise Permit | GW-RN0624-17 | 6 Oct 2017 | 5 Apr 2018 |
| | | GW-RN0720-17 | 26 Nov 2017 | 25 May 2018 |
| | | GW-RN0114-18 | 5 Apr 2018 | 4 Oct 2018 |
| Contract 7 | | | | |
| 1 | Air pollution Control (Construction Dust) Regulation | Ref. No: 397015 | 21 Dec 2015 | Till the end of Contract |
| 2 | Chemical Waste Producer Registration | Waste Producer No.: 5214-641-K3202-01 | 24 Mar 2016 | Till the end of Contract |
| 3 | Water Pollution Control Ordinance - Discharge License | No.: WT00024422-2016 | 10 May 2016 | 31 May 2021 |
| 4 | Waste Disposal Regulation - Billing Account for Disposal of Construction Waste | Account No. 7024129 | 21 Jan 2016 | Till the end of Contract |
| 5 | Construction Noise Permit | GW-RN0705-17 | 5 Nov 2017 | 4 May 2018 |
| Contract 4 | | | | |
| 1 | Air pollution Control (Construction Dust) Regulation | Ref. No. 405353 | 22 July 2016 | Till the end of Contract |
| 2 | Waste Disposal Regulation - Billing Account for Disposal of Construction Waste | Account No. 7024973 | 13 May 2016 | Till the end of Contract |

3 SUMMARY OF IMPACT MONITORING REQUIREMENTS

3.1 GENERAL

3.1.1 The Environmental Monitoring and Audit requirements are set out in the Approved EM&A manual. Environmental issues such as air quality, construction noise and water quality were identified as the key issues during the construction phase of the Project.

3.1.2 A summary of construction phase EM&A requirements are presented in the sub-sections below.

3.2 MONITORING PARAMETERS

3.2.1 The EM&A program of construction phase monitoring shall cover the following environmental issues:

- Air quality;
- Construction noise; and
- Water quality

3.2.2 A summary of the monitoring parameters is presented in *Table 3-1*.

Table 3-1 Summary of EM&A Requirements

| Environmental Issue | Parameters |
|---------------------|--|
| Air Quality | <ul style="list-style-type: none"> • 1-hour TSP by Real-Time Portable Dust Meter; and • 24-hour TSP by High Volume Air Sampler. |
| Noise | <ul style="list-style-type: none"> • $L_{eq(30min)}$ in normal working days (Monday to Saturday) 07:00-19:00 except public holiday; and • 3 sets of consecutive $L_{eq(5min)}$ on restricted hours i.e. 19:00 to 07:00 next day, and whole day of public holiday or Sunday • Supplementary information for data auditing, statistical results such as L_{10} and L_{90} shall also be obtained for reference. |
| Water Quality | In-situ Measurements <ul style="list-style-type: none"> • Dissolved Oxygen Concentration (mg/L); • Dissolved Oxygen Saturation (%); • Turbidity (NTU); • pH unit; • Water depth (m); and • Temperature (°C). |
| | Laboratory Analysis <ul style="list-style-type: none"> • Suspended Solids (mg/L) |

3.3 MONITORING LOCATIONS

3.3.1 The designated monitoring locations as recommended in the *EM&A Manual* are shown in *Appendix D*. As the access to some of the designated monitoring locations was questionable due to safety reason or denied by the landlords, alternative locations therefore have had proposed. The latest alternative monitoring locations has been updated in the revised EM&A Programme (Rev.7) which approved by EPD on 7 April 2017. *Table 3-2*, *Table 3-3* and *Table 3-4* are respectively listed the air quality, construction noise and water quality monitoring locations for the Project and a map showing these monitoring stations is presented in *Appendix E*.

Table 3-2 Impact Monitoring Stations - Air Quality

| Station ID | Description | Works Area | Related to the Work Contract |
|------------|--|--------------------------------|------------------------------|
| AM1b^ | Open area at Tsung Yuen Ha Village | BCP | SS C505 Contract 7 |
| AM2 | Village House near Lin Ma Hang Road | LMH to Frontier Closed Area | Contract 6 |
| AM3 | Ta Kwu Ling Fire Service Station of Ta Kwu Ling Village. | LMH to Frontier Closed Area | Contract 6 |

| Station ID | Description | Works Area | Related to the Work Contract |
|-------------------|-----------------------------------|-----------------------------|------------------------------|
| AM4b [^] | House no. 10B1 Nga Yiu Ha Village | LMH to Frontier Closed Area | Contract 6 |
| AM5a [^] | Ping Yeung Village House | Ping Yeung to Wo Keng Shan | Contract 6 |
| AM6 | Wo Keng Shan Village House | Ping Yeung to Wo Keng Shan | Contract 6 |
| AM7b [@] | Loi Tung Village House | Sha Tau Kok Road | Contract 2 Contract 6 |
| AM8 | Po Kat Tsai Village No. 4 | Po Kat Tsai | Contract 2 |
| AM9b [#] | Nam Wa Po Village House No. 80 | Fanling | Contract 3 |

Proposal for the change of air quality monitoring location from AM9a to AM9b was submitted to EPD on 4 Nov 2013 after verified by the IEC and it was approved by EPD (EPD's ref.: (15) in EP 2/N7/A/52 Pt.10 dated 8 Nov 2013).

** Proposal for the change of air quality monitoring location from AM1 to AM1a was submitted to EPD on 24 March 2014 after verified by the IEC. It was approved by EPD (EPD's ref.: (6) in EP 2/N7/A/52 Pt.12 dated 9 Jun 2014).*

@ Proposal for the change of air quality monitoring location from AM7a to AM7b was submitted to EPD on 4 June 2014 after verified by the IEC. It was approved by EPD (EPD's ref.: (7) in EP 2/N7/A/52 Pt.12 dated 9 Jun 2014).

^ Proposal for change of air quality monitoring locations was enclosed in the updated EM&A Programme which approval by EPD on 29 Mar 2016.

Table 3-3 Impact Monitoring Stations - Construction Noise

| Station ID | Description | Works Area | Related to the Work Contract |
|-------------------|--|-------------------------------------|------------------------------|
| NM1 | Tsung Yuen Ha Village House No. 63 | BCP | SS C505 Contract 7 |
| NM2a [#] | Village House near Lin Ma Hang Road | Lin Ma Hang to Frontier Closed Area | Contract 6 |
| NM3 | Ping Yeung Village House (facade facing northeast) | Ping Yeung to Wo Keng Shan | Contract 6 |
| NM4 | Wo Keng Shan Village House | Ping Yeung to Wo Keng Shan | Contract 6 |
| NM5 | Village House, Loi Tung | Sha Tau Kok Road | Contract 2, Contract 6 |
| NM6 | Tai Tong Wu Village House 2 | Sha Tau Kok Road | Contract 2, Contract 6 |
| NM7 | Po Kat Tsai Village | Po Kat Tsai | Contract 2 |
| NM8 | Village House, Tong Hang | Fanling | Contract 2 Contract 3 |
| NM9 | Village House, Kiu Tau Village | Fanling | Contract 3 |
| NM10 | Nam Wa Po Village House No. 80 | Fanling | Contract 3 |

Proposal for the change of construction noise monitoring location from NM2 to NM2a was verified by the IEC on 6 May 2016 and was effective on 9 May 2016.

Table 3-4 Impact Monitoring Stations - Water Quality

| Station ID | Description | Coordinates of Designated / Alternative Location | | Nature of the location | Related to the Work Contract |
|----------------|--------------------------------|--|----------|--|------------------------------|
| | | Easting | Northing | | |
| WM1 | Downstream of Kong Yiu Channel | 833 679 | 845 421 | Alternative location located at upstream 51m of the designated location | SS C505 Contract 6 |
| WM1-Control | Upstream of Kong Yiu Channel | 834 185 | 845 917 | NA | SS C505 Contract 6 |
| WM2A | Downstream of River Ganges | 834 204 | 844 471 | Alternative location located at upstream 81m of the designated location | Contract 6 |
| WM2A(a)* | Downstream of River Ganges | 834 191 | 844 474 | Alternative location located at upstream 70m of the designated location | Contract 6 |
| WM2A-Controlx# | Upstream of River Ganges | 835 377 | 844 188 | Alternative location located at upstream 160m of the designated location | Contract 6 |
| WM2B | Downstream of River Ganges | 835 433 | 843 397 | NA | Contract 6 |
| WM2B-Control | Upstream of River Ganges | 835 835 | 843 351 | Alternative location located at downstream 31m of the designated location | Contract 6 |
| WM3x# | Downstream of River Indus | 836 206 | 842 270 | Alternative location located at downstream 180m of the designated location | Contract 2 Contract 6 |
| WM3-Control | Upstream of River Indus | 836 763 | 842 400 | Alternative location located at downstream 26m of the designated location | Contract 2 Contract 6 |
| WM4 | Downstream of Ma Wat Channel | 833 850 | 838 338 | Alternative location located at upstream 11m of the designated location | Contract 2 Contract 3 |
| WM4-Control A | Kau Lung Hang Stream | 834 028 | 837 695 | Alternative location located at downstream 28m of the designated location | Contract 2 Contract 3 |
| WM4-Control B | Upstream of Ma Wat Channel | 833760 | 837395 | Alternative location located at upstream 15m of the designated location | Contract 2 Contract 3 |

Note: EPD has approved the revised EM&A Programme (Rev.7) which proposed that (1) if the measured water depth of the monitoring station is lower than 150 mm, alternative location based on the criteria were selected to perform water monitoring; and (2) If no suitable alternative location could be found within 15m far from the original location, the sampling at that location will be cancelled since sampling at too far from the designated location could not make a representative sample in accordance with the updated EM&A Programme (Rev. 07) (Section 4.1.4) (EPD ref.: () in EP2/N7/A/52 Ax(1) Pt.20 dated 7 April 2017)

(*) Proposal for the change of water monitoring location from WM2A to WM2A(a) was verified by the IEC and it was approved by EPD. (EPD's ref. (10) in EP 2/N7/A/52 Pt.19)

(#) Proposal for the change of water quality monitoring location (WM3x and WM2A-Cx) was included in the EM&A Programme Rev .05 which approved by EPD on 29 March 2016 (EPD ref.: (3) in EP2/N7/A/52 Ax(1) Pt.19)

3.4 MONITORING FREQUENCY AND PERIOD

The requirements of impact monitoring are stipulated in Sections 2.1.6, 3.1.5 and 4.1.6 of the

approved *EM&A Manual* and presented as follows.

Air Quality Monitoring

- 3.4.1 Frequency of impact air quality monitoring is as follows:
- 1-hour TSP 3 times every six days during course of works
 - 24-hour TSP Once every 6 days during course of works.

Noise Monitoring

- 3.4.2 One set of $L_{eq(30min)}$ as 6 consecutive $L_{eq(5min)}$ between 0700-1900 hours on normal weekdays and once every week during course of works. If construction work necessary to carry out at other time periods, i.e. restricted time period (19:00 to 07:00 the next morning and whole day on public holidays) (hereinafter referred as “the restricted hours”), additional weekly impact monitoring for $L_{eq(5min)}$ measurement shall be employed during respective restricted hours periods.. Supplementary information for data auditing, statistical results such as L_{10} and L_{90} shall also be obtained for reference.

Water Quality Monitoring

- 3.4.3 The water quality monitoring frequency shall be 3 days per week during course of works. The interval between two sets of monitoring shall not be less than 36 hours.

3.5 MONITORING EQUIPMENT

Air Quality Monitoring

- 3.5.1 The 24-hour and 1-hour TSP levels shall be measured by following the standard high volume sampling method as set out in the *Title 40 of the Code of Federal Regulations, Chapter 1 (Part 50), Appendix B*. If the ET proposes to use a direct reading dust meter to measure 1-hour TSP levels, it shall submit sufficient information to the IEC to approve.
- 3.5.2 The filter paper of 24-hour TSP measurement shall be determined by HOKLAS accredited laboratory.
- 3.5.3 All equipment to be used for air quality monitoring is listed in **Table 3-5**.

Table 3-5 Air Quality Monitoring Equipment

| Equipment | Model |
|-------------------------|---|
| 24-Hr TSP | |
| High Volume Air Sampler | TISCH High Volume Air Sampler, HVS Model TE-5170* |
| Calibration Kit | TISCH Model TE-5025A* |
| 1-Hour TSP | |
| Portable Dust Meter | Sibata LD-3B Laser Dust monitor Particle Mass Profiler & Counter* |

* Instrument was used in the Reporting Period and the calibration certificate could be referred in Appendix F.

Wind Data Monitoring Equipment

- 3.5.4 According to the approved EM&A Manual, wind data monitoring equipment shall also be provided and set up for logging wind speed and wind direction near the dust monitoring locations. The equipment installation location shall be proposed by the ET and agreed with the IEC. For installation and operation of wind data monitoring equipment, the following points shall be observed:
- 1) The wind sensors should be installed 10 m above ground so that they are clear of obstructions or turbulence caused by buildings.
 - 2) The wind data should be captured by a data logger. The data shall be downloaded for analysis at least once a month.
 - 3) The wind data monitoring equipment should be re-calibrated at least once every six months.

4) Wind direction should be divided into 16 sectors of 22.5 degrees each.

- 3.5.5 ET has liaised with the landlords of the successful granted HVS installation premises. However, the owners rejected to provide premises for wind data monitoring equipment installation.
- 3.5.6 Under this situation, the ET proposed alternative methods to obtain representative wind data. Meteorological information as extracted from “the Hong Kong Observatory Ta Kwu Ling Station” is alternative method to obtain representative wind data. For Ta Kwu Ling Station, it is located nearby the Project site. Moreover, this station is located at 15m above mean sea level while its anemometer is located at 13m above the existing ground which in compliance with the general setting up requirement. Furthermore, this station also can be to provide the humidity, rainfall, and air pressure and temperature etc. meteorological information. In Hong Kong of a lot development projects, weather information extracted from Hong Kong Observatory is common alternative method if weather station installation not allowed.

Noise Monitoring

- 3.5.7 Sound level meter in compliance with the International Electrotechnical Commission Publications 651: 1979 (Type 1) and 804: 1985 (Type 1) specifications shall be used for carrying out the noise monitoring. The sound level meter shall be checked using an acoustic calibrator. The wind speed shall be checked with a portable wind speed meter capable of measuring the wind speed in m/s.
- 3.5.8 Noise monitoring equipment to be used for monitoring is listed in *Table 3-6*.

Table 3-6 Construction Noise Monitoring Equipment

| Equipment | Model |
|-------------------------------|---|
| Integrating Sound Level Meter | B&K Type 2238* or Rion NL-31* or Rion NL-52* |
| Calibrator | B&K Type 4231* or Quest QC-20* or Rion NC-74* |
| Portable Wind Speed Indicator | Testo Anemometer |

** Instrument was used in the Reporting Period and the calibration certificate could be referred in Appendix F.*

- 3.5.9 Sound level meters listed above comply with the *International Electrotechnical Commission Publications 651: 1979 (Type 1) and 804: 1985 (Type 1)* specifications, as recommended in TM issued under the NCO. The acoustic calibrator and sound level meter to be used in the impact monitoring will be calibrated yearly.

Water Quality Monitoring

- 3.5.10 DO and water temperature should be measured in-situ by a DO/temperature meter. The instrument should be portable and weatherproof using a DC power source. It should have a membrane electrode with automatic temperature compensation complete with a cable. The equipment should be capable of measuring:
- a DO level in the range of 0-20 mg/l and 0-200% saturation; and
 - a temperature of between 0 and 45 degree Celsius.
- 3.5.11 A portable pH meter capable of measuring a range between 0.0 and 14.0 should be provided to measure pH under the specified conditions accordingly to the APHA Standard Methods.
- 3.5.12 The instrument should be portable and weatherproof using a DC power source. It should have a photoelectric sensor capable of measuring turbidity between 0-1000 NTU.
- 3.5.13 A portable, battery-operated echo sounder or tape measure will be used for the determination of water depth at each designated monitoring station as appropriate.
- 3.5.14 A water sampler e.g. Kahlsico Water Sampler, which is a transparent PVC cylinder with capacity not less than 2 litres, will be used for water sampling if water depth over than 0.5m. For

sampling from very shallow water depths e.g. <0.5 m, water sample collection will be directly from water surface below 100mm use sampling plastic bottle to avoid inclusion of bottom sediment or humus. Moreover, Teflon/stainless steel bailer or self-made sampling buckets maybe used for water sampling. The equipment used for sampling will be depended the sampling location and depth situations.

- 3.5.15 Water samples for laboratory measurement of SS will be collected in high density polythene bottles, packed in ice (cooled to 4 °C without being frozen), and delivered to the laboratory in the same day as the samples were collected.
- 3.5.16 Analysis of suspended solids should be carried out in a HOKLAS or other accredited laboratory. Water samples of about 1L should be collected at the monitoring stations for carrying out the laboratory suspended solids determination. The SS determination work should start within 24 hours after collection of the water samples. The SS analyses should follow the *APHA Standard Methods 2540D* with Limit of Reporting of 2 mg/L.
- 3.5.17 Water quality monitoring equipment used in the impact monitoring is listed in **Table 3-7**. Suspended solids (SS) analysis is carried out by a local HOKLAS-accredited laboratory, namely *ALS Technichem (HK) Pty Ltd*.

Table 3-7 Water Quality Monitoring Equipment

| Equipment | Model |
|------------------------|---|
| Water Depth Detector | Eagle Sonar or tape measures |
| Water Sampler | A 2-litre transparent PVC cylinder with latex cups at both ends or teflon/stainless steel bailer or self-made sampling bucket |
| Thermometer & DO meter | YSI Professional Plus /YSI PRO20 Handheld Dissolved Oxygen Instrument/ YSI 550A Multifunctional Meter*/ YSI Professional DSS |
| pH meter | YSI Professional Plus / AZ8685 pH pen-style meter*/ YSI 6820/ 650MDS/ YSI Professional DSS |
| Turbidimeter | Hach 2100Q*/ YSI 6820/ 650MDS/ YSI Professional DSS |
| Sample Container | High density polythene bottles (provided by laboratory) |
| Storage Container | ‘Willow’ 33-liter plastic cool box with Ice pad |

* Instrument was used in the Reporting Period and the calibration certificate could be referred in Appendix F.

3.6 MONITORING METHODOLOGY

1-hour TSP Monitoring

- 3.6.1 The 1-hour TSP monitor was a brand named “Sibata LD-3B Laser Dust monitor Particle Mass Profiler & Counter” which is a portable, battery-operated laser photometer. The 1-hour TSP meter provides a real time 1-hour TSP measurement based on 90° light scattering. The 1-hour TSP monitor consists of the following:
 - (a.) A pump to draw sample aerosol through the optic chamber where TSP is measured;
 - (b.) A sheath air system to isolate the aerosol in the chamber to keep the optics clean for maximum reliability; and
 - (c.) A built-in data logger compatible with Windows based program to facilitate data collection, analysis and reporting.

3.6.2 The 1-hour TSP meter is used within the valid period as follow manufacturer’s Operation and Service Manual.

24-hour TSP Monitoring

3.6.3 The equipment used for 24-hour TSP measurement is Tisch Environmental, Inc. Model TE-5170 TSP high volume air sampling system, which complied with *EPA Code of Federal Regulation, Appendix B to Part 50*. The High Volume Air Sampler (HVS) consists of the following:

- (a.) An anodized aluminum shelter;
 - (b.) A 8"x10" stainless steel filter holder;
 - (c.) A blower motor assembly;
 - (d.) A continuous flow/pressure recorder;
 - (e.) A motor speed-voltage control/elapsed time indicator;
 - (f.) A 7-day mechanical timer, and
 - (g.) A power supply of 220v/50 Hz
- 3.6.4 The HVS is operated and calibrated on a regular basis in accordance with the manufacturer's instruction using Tisch Calibration Kit Model TE-5025A. Calibration would carry out in two month interval.
- 3.6.5 24-hour TSP is collected by the ET on filters of HVS and quantified by a local HOKLAS accredited laboratory, ALS Technichem (HK) Pty Ltd (ALS), upon receipt of the samples. The ET keep all the sampled 24-hour TSP filters in normal air conditioned room conditions, i.e. 70% RH (Relative Humidity) and 25°C, for six months prior to disposal.

Noise Monitoring

- 3.6.6 Noise measurements were taken in terms of the A-weighted equivalent sound pressure level (L_{eq}) measured in decibels dB(A). Supplementary statistical results (L_{10} and L_{90}) were also obtained for reference.
- 3.6.7 During the monitoring, all noise measurements would be performed with the meter set to FAST response and on the A-weighted equivalent continuous sound pressure level (L_{eq}). $L_{eq(30min)}$ in six consecutive $L_{eq(5min)}$ measurements will use as the monitoring parameter for the time period between 0700-1900 hours on weekdays; $L_{eq(5min)}$ measurements would be used as monitoring parameter for other time periods (e.g. during restricted hours), if necessary.
- 3.6.8 Prior of noise measurement, the accuracy of the sound level meter is checked using an acoustic calibrator generating a known sound pressure level at a known frequency. The checking is performed before and after the noise measurement.

Water Quality

- 3.6.9 Water quality monitoring is conducted at the designated or alternative locations. The sampling procedures with the in-situ monitoring are presented as below:

Sampling Procedure

- 3.6.10 A Digital Global Positioning System (GPS) is used to identify the designated monitoring stations prior to water sampling. A portable, battery-operated echo sounder or tape measurement is used for the determination of water depth at each station. At each station, water sample would be collected from 0.1m below water surface or the water surface to prevent the river bed sediment for stirring.
- 3.6.11 If the water level of a monitoring station is too shallow when sampling, sediment would be disturbed which affecting the accuracy of water quality monitoring. In order to avoid disturbing sediment, depth limits should be set up for the water sampling for the ease of reference. When the measured water depth of the monitoring station (both control and impact stations) is lower than 150mm, water monitoring would not be to perform at that monitoring location. Instead, the monitoring location will be moved to a temporary alternative location monitoring location based on the criteria below:-
- (a) the alternative location should be either upstream or downstream of the original location and at the same the river/drain channel
 - (b) the alternative location should be within 15m far from the original location
 - (c) if no suitable alternative location could be found within 15m far from the original location, the sampling at that location will be cancelled since sampling at too far from the designated

location could not make a representative sample.

- 3.6.12 The sample container will be rinsed with a portion of the water sample. The water sample then will be transferred to the high-density polythene bottles as provided by the laboratory, labeled with a unique sample number and sealed with a screw cap.
- 3.6.13 Before sampling, general information such as the date and time of sampling, weather condition as well as the personnel responsible for the monitoring would be recorded on the field data sheet.
- 3.6.14 A ‘Willow’ 33-liter plastic cool box packed with ice will be used to preserve the water samples prior to arrival at the laboratory for chemical determination. The water temperature of the cool box is maintained at a temperature as close to 4⁰C as possible without being frozen. Samples collected are delivered to the laboratory upon collection.

In-situ Measurement

- 3.6.15 YSI PRO20 Handheld Dissolved Oxygen Instrument is used for water in-situ measures, which automates the measurements and data logging of temperature, dissolved oxygen and dissolved oxygen saturation.
- 3.6.16 A portable AZ Model 8685 is used for in-situ pH measurement. The pH meter is capable of measuring pH in the range of 0 – 14 and readable to 0.1.
- 3.6.17 A portable Hach 2100Q Turbidimeter is used for in-situ turbidity measurement. The turbidity meter is capable of measuring turbidity in the range of 0 – 1000 NTU.
- 3.6.18 All in-situ measurement equipment are calibrated by HOKLAS accredited laboratory of three month interval.

Laboratory Analysis

- 3.6.19 All water samples analyzed Suspended Solids (SS) will be carried out by a local HOKLAS-accredited testing laboratory (ALS Technichem (HK) Pty Ltd HOKLAS registration no. 66). SS determination using *APHA Standard Methods 2540D* as specified in the *EM&A Manual* will start within 48 hours of water sample receipt.

3.7 EQUIPMENT CALIBRATION

- 3.7.1 Calibration of the HVS is performed upon installation and thereafter at bimonthly intervals in accordance with the manufacturer’s instruction using the certified standard calibrator (TISCH Model TE-5025A). Moreover, the Calibration Kit would be calibrated annually. The calibration data are properly documented and the records are maintained by ET for future reference.
- 3.7.2 The 1-hour TSP meter was calibrated by the supplier prior to purchase. Zero response of the equipment would be checked before and after each monitoring event. Annually calibration with the High Volume Sampler (HVS) in same condition would be undertaken by the Laboratory.
- 3.7.3 The sound level meter and calibrator are calibrated and certified by a laboratory accredited under HOKLAS or any other international accreditation scheme at yearly basis.
- 3.7.4 All water quality monitoring equipment would be calibrated by HOKLAS accredited laboratory of three month intervals.
- 3.7.5 The calibration certificates of all monitoring equipment used for the impact monitoring program in the Reporting Period and the HOKLAS accredited certificate of laboratory are attached in **Appendix F**.

3.8 DERIVATION OF ACTION/LIMIT (A/L) LEVELS

3.8.1 The baseline results form the basis for determining the environmental acceptance criteria for the impact monitoring. According to the approved Environmental Monitoring and Audit Manual, the air quality, construction noise and water quality criteria were set up, namely Action and Limit levels are listed in *Tables 3-8, 3-9 and 3-10*.

Table 3-8 Action and Limit Levels for Air Quality Monitoring

| Monitoring Station | Action Level ($\mu\text{g}/\text{m}^3$) | | Limit Level ($\mu\text{g}/\text{m}^3$) | |
|--------------------|---|-------------|--|-------------|
| | 1-hour TSP | 24-hour TSP | 1-hour TSP | 24-hour TSP |
| AM1b | 265 | 143 | 500 | 260 |
| AM2 | 268 | 149 | | |
| AM3 | 269 | 145 | | |
| AM4b | 267 | 148 | | |
| AM5a | 268 | 143 | | |
| AM6 | 269 | 148 | | |
| AM7b | 275 | 156 | | |
| AM8 | 269 | 144 | | |
| AM9b | 271 | 151 | | |

Table 3-9 Action and Limit Levels for Construction Noise

| Monitoring Location | Action Level | Limit Level in dB(A) |
|--|---|---|
| | Time Period: 0700-1900 hours on normal weekdays | |
| NM1, NM2a, NM3, NM4, NM5, NM6, NM7, NM8, NM9, NM10 | When one or more documented complaints are received | 75 dB(A) ^{Note 1 & Note 2} |

Note 1: Acceptable Noise Levels for school should be reduced to 70 dB(A) and 65 dB(A) during examination period.

Note 2: If works are to be carried out during restricted hours, the conditions stipulated in the construction noise permit issued by the NCA have to be followed.

Table 3-10 Action and Limit Levels for Water Quality

| Parameter | Performance criteria | Monitoring Location | | | | |
|-----------------|----------------------|--|----------|---------|----------|---------|
| | | WM1 | WM2A(a) | WM2B | WM3x | WM4 |
| DO (mg/L) | Action Level | (*)4.23 | (**)4.00 | (*)4.74 | (**)4.00 | (*)4.14 |
| | Limit Level | (#)4.19 | (**)4.00 | (#)4.60 | (**)4.00 | (#)4.08 |
| Turbidity (NTU) | Action Level | 51.3 | 24.9 | 11.4 | 13.4 | 35.2 |
| | | AND 120% of upstream control station of the same day | | | | |
| | Limit Level | 67.6 | 33.8 | 12.3 | 14.0 | 38.4 |
| SS (mg/L) | Action Level | 54.5 | 14.6 | 11.8 | 12.6 | 39.4 |
| | | AND 120% of upstream control station of the same day | | | | |
| | Limit Level | 64.9 | 17.3 | 12.4 | 12.9 | 45.5 |
| | | AND 130% of upstream control station of the same day | | | | |

Remarks:

(*) The Proposed Action Level of Dissolved Oxygen is adopted to be used 5%-ile of baseline data

(**) The Proposed Action & Limit Level of Dissolved Oxygen is used 4mg/L

(#) The Proposed Limit Level of Dissolved Oxygen is adopted to be used 1%-ile of baseline data

3.8.2 Should non-compliance of the environmental quality criteria occurs, remedial actions will be triggered according to the Event and Action Plan which presented in **Appendix G**.

3.9 DATA MANAGEMENT AND DATA QA/QC CONTROL

3.9.1 All monitoring data will be handled by the ET's in-house data recording and management system.

The monitoring data recorded in the equipment will be downloaded directly from the equipment at the end of each monitoring day. The downloaded monitoring data will input into a computerized database maintained by the ET. The laboratory results will be input directly into the computerized database and checked by personnel other than those who input the data.

- 3.9.2 For monitoring parameters that require laboratory analysis, the local laboratory shall follow the QA/QC requirements as set out under the HOKLAS scheme for the relevant laboratory tests.

4 AIR QUALITY MONITORING

4.1 GENERAL

4.1.1 In the Reporting Period, construction works under the project have been commenced in Contracts 2, 3, 4, 6, 7 and Contract SS C505. Hence, air quality monitoring was performed at all designated locations.

4.1.2 The air quality monitoring schedule is presented in *Appendix H* and the monitoring results are summarized in the following sub-sections.

4.2 AIR QUALITY MONITORING RESULTS

4.2.1 In the Reporting Period, a total of *135* events of 1-hour TSP and *50* events 24-hours TSP monitoring were carried out and the monitoring results are summarized in *Tables 4-1 to 4-9*. The detailed 24-hour TSP monitoring data are presented in *Appendix I* and the relevant graphical plots are shown in *Appendix J*.

Table 4-1 Summary of 24-hour and 1-hour TSP Monitoring Results – AM1b

| Date | 24-hour TSP ($\mu\text{g}/\text{m}^3$) | 1-hour TSP ($\mu\text{g}/\text{m}^3$) | | | | |
|-----------------|--|---|------------|-------------------------|-------------------------|-------------------------|
| | | Date | Start Time | 1 st reading | 2 nd reading | 3 rd reading |
| 6-Mar-18 | 75 | 5-Mar-18 | 9:26 | 55 | 63 | 67 |
| 12-Mar-18 | 72 | 10-Mar-18 | 8:47 | 54 | 52 | 60 |
| 17-Mar-18 | 68 | 16-Mar-18 | 9:06 | 66 | 69 | 66 |
| 23-Mar-18 | 69 | 22-Mar-18 | 10:24 | 64 | 67 | 66 |
| 29-Mar-18 | 67 | 28-Mar-18 | 10:04 | 80 | 79 | 77 |
| Average (Range) | 70 (67 – 75) | Average (Range) | | 66 (52 – 80) | | |

Table 4-2 Summary of 24-hour and 1-hour TSP Monitoring Results – AM2

| Date | 24-hour TSP ($\mu\text{g}/\text{m}^3$) | 1-hour TSP ($\mu\text{g}/\text{m}^3$) | | | | |
|-----------------|--|---|------------|-------------------------|-------------------------|-------------------------|
| | | Date | Start Time | 1 st reading | 2 nd reading | 3 rd reading |
| 6-Mar-18 | 147 | 5-Mar-18 | 9:30 | 56 | 61 | 66 |
| 12-Mar-18 | 142 | 10-Mar-18 | 8:52 | 63 | 60 | 66 |
| 17-Mar-18 | 125 | 16-Mar-18 | 9:11 | 70 | 71 | 72 |
| 23-Mar-18 | 143 | 22-Mar-18 | 10:01 | 61 | 59 | 60 |
| 29-Mar-18 | 144 | 28-Mar-18 | 9:15 | 75 | 79 | 77 |
| Average (Range) | 140 (125 – 147) | Average (Range) | | 66 (56 – 79) | | |

Table 4-3 Summary of 24-hour and 1-hour TSP Monitoring Results – AM3

| Date | 24-hour TSP ($\mu\text{g}/\text{m}^3$) | 1-hour TSP ($\mu\text{g}/\text{m}^3$) | | | | |
|-----------------|--|---|------------|-------------------------|-------------------------|-------------------------|
| | | Date | Start Time | 1 st reading | 2 nd reading | 3 rd reading |
| 6-Mar-18 | 56 | 5-Mar-18 | 9:33 | 54 | 57 | 63 |
| 12-Mar-18 | 69 | 10-Mar-18 | 8:57 | 50 | 48 | 55 |
| 17-Mar-18 | 55 | 16-Mar-18 | 9:13 | 68 | 67 | 70 |
| 23-Mar-18 | 100 | 22-Mar-18 | 13:11 | 64 | 63 | 63 |
| 29-Mar-18 | 79 | 28-Mar-18 | 13:03 | 73 | 76 | 73 |
| Average (Range) | 72 (55 – 100) | Average (Range) | | 63 (48 – 76) | | |

Table 4-4 Summary of 24-hour and 1-hour TSP Monitoring Results – AM4b

| Date | 24-hour TSP ($\mu\text{g}/\text{m}^3$) | 1-hour TSP ($\mu\text{g}/\text{m}^3$) | | | | |
|-----------------|--|---|------------|-------------------------|-------------------------|-------------------------|
| | | Date | Start Time | 1 st reading | 2 nd reading | 3 rd reading |
| 1-Mar-18 | 70 | 3-Mar-18 | 8:52 | 63 | 61 | 68 |
| 7-Mar-18 | 92 | 9-Mar-18 | 9:32 | 36 | 37 | 41 |
| 13-Mar-18 | 58 | 15-Mar-18 | 9:38 | 40 | 46 | 52 |
| 19-Mar-18 | 65 | 20-Mar-18 | 10:47 | 53 | 54 | 52 |
| 24-Mar-18 | 88 | 26-Mar-18 | 9:52 | 73 | 70 | 65 |
| 30-Mar-18 | 73 | | | | | |
| Average (Range) | 74 (58 – 92) | Average (Range) | | 54 (36 – 73) | | |

Table 4-5 Summary of 24-hour and 1-hour TSP Monitoring Results – AM5a

| Date | 24-hour TSP ($\mu\text{g}/\text{m}^3$) | 1-hour TSP ($\mu\text{g}/\text{m}^3$) | | | | |
|-----------------|--|---|------------|-------------------------|-------------------------|-------------------------|
| | | Date | Start Time | 1 st reading | 2 nd reading | 3 rd reading |
| 1-Mar-18 | 48 | 3-Mar-18 | 8:54 | 65 | 62 | 66 |
| 7-Mar-18 | 75 | 9-Mar-18 | 9:29 | 33 | 34 | 39 |
| 13-Mar-18 | 75 | 15-Mar-18 | 9:36 | 43 | 50 | 56 |
| 19-Mar-18 | 43 | 20-Mar-18 | 10:03 | 50 | 48 | 51 |
| 24-Mar-18 | 99 | 26-Mar-18 | 9:50 | 65 | 68 | 66 |
| 30-Mar-18 | 50 | | | | | |
| Average (Range) | 65 (43 – 99) | Average (Range) | | 53 (33 – 68) | | |

Table 4-6 Summary of 24-hour and 1-hour TSP Monitoring Results – AM6

| Date | 24-hour TSP ($\mu\text{g}/\text{m}^3$) | 1-hour TSP ($\mu\text{g}/\text{m}^3$) | | | | |
|-----------------|--|---|------------|-------------------------|-------------------------|-------------------------|
| | | Date | Start Time | 1 st reading | 2 nd reading | 3 rd reading |
| 1-Mar-18 | 103 | 3-Mar-18 | 9:07 | 63 | 60 | 64 |
| 7-Mar-18 | 76 | 9-Mar-18 | 9:23 | 36 | 39 | 42 |
| 13-Mar-18 | 83 | 15-Mar-18 | 9:28 | 50 | 52 | 59 |
| 19-Mar-18 | 123 | 20-Mar-18 | 13:09 | 42 | 54 | 50 |
| 24-Mar-18 | 119 | 26-Mar-18 | 9:45 | 59 | 67 | 81 |
| 30-Mar-18 | 88 | | | | | |
| Average (Range) | 99 (76 – 123) | Average (Range) | | 55 (36 – 81) | | |

Table 4-7 Summary of 24-hour and 1-hour TSP Monitoring Results – AM7b

| Date | 24-hour TSP ($\mu\text{g}/\text{m}^3$) | 1-hour TSP ($\mu\text{g}/\text{m}^3$) | | | | |
|-----------------|--|---|------------|-------------------------|-------------------------|-------------------------|
| | | Date | Start Time | 1 st reading | 2 nd reading | 3 rd reading |
| 1-Mar-18 | 92 | 3-Mar-18 | 9:12 | 65 | 58 | 62 |
| 7-Mar-18 | 103 | 9-Mar-18 | 9:03 | 44 | 46 | 47 |
| 13-Mar-18 | 87 | 15-Mar-18 | 9:23 | 47 | 51 | 56 |
| 19-Mar-18 | 106 | 20-Mar-18 | 9:23 | 78 | 78 | 82 |
| 24-Mar-18 | 151 | 26-Mar-18 | 9:33 | 53 | 59 | 63 |
| 30-Mar-18 | 119 | | | | | |
| Average (Range) | 110 (87 – 151) | Average (Range) | | 59 (44 – 82) | | |

Table 4-8 Summary of 24-hour and 1-hour TSP Monitoring Results – AM8

| Date | 24-hour TSP ($\mu\text{g}/\text{m}^3$) | 1-hour TSP ($\mu\text{g}/\text{m}^3$) | | | | |
|-----------------|--|---|------------|-------------------------|-------------------------|-------------------------|
| | | Date | Start Time | 1 st reading | 2 nd reading | 3 rd reading |
| 1-Mar-18 | 45 | 3-Mar-18 | 13:32 | 65 | 78 | 68 |
| 7-Mar-18 | 24 | 9-Mar-18 | 13:16 | 41 | 45 | 45 |
| 13-Mar-18 | 51 | 15-Mar-18 | 9:12 | 50 | 53 | 60 |
| 19-Mar-18 | 59 | 20-Mar-18 | 13:18 | 77 | 79 | 77 |
| 24-Mar-18 | 83 | 26-Mar-18 | 9:16 | 54 | 60 | 63 |
| 30-Mar-18 | 58 | | | | | |
| Average (Range) | 53 (24 – 83) | Average (Range) | | 61 (41 – 79) | | |

Table 4-9 Summary of 24-hour and 1-hour TSP Monitoring Results – AM9b

| Date | 24-hour TSP ($\mu\text{g}/\text{m}^3$) | 1-hour TSP ($\mu\text{g}/\text{m}^3$) | | | | |
|-----------------|--|---|------------|-------------------------|-------------------------|-------------------------|
| | | Date | Start Time | 1 st reading | 2 nd reading | 3 rd reading |
| 6-Mar-18 | 57 | 5-Mar-18 | 10:14 | 58 | 57 | 64 |
| 12-Mar-18 | 48 | 10-Mar-18 | 9:18 | 41 | 43 | 48 |
| 17-Mar-18 | 114 | 16-Mar-18 | 9:35 | 49 | 52 | 59 |
| 23-Mar-18 | 104 | 22-Mar-18 | 9:24 | 85 | 88 | 71 |
| 29-Mar-18 | 79 | 28-Mar-18 | 9:06 | 63 | 62 | 62 |
| Average (Range) | 80 (48 – 114) | Average (Range) | | 60 (41 – 88) | | |

- 4.2.2 As shown in *Tables 4-1 to 4-9*, all the 1-hour TSP and 24-hour TSP monitoring results were below the Action/Limit Levels. No Notification of Exceedance (NOE) was issued in this Reporting Period.
- 4.2.3 The meteorological data during the impact monitoring days are summarized in *Appendix K*.

5 CONSTRUCTION NOISE MONITORING

5.1 GENERAL

- 5.1.1 In the Reporting Period, construction works under the project have been commenced in Contracts 2, 3, 4, 6, 7 and Contract SS C505 and noise monitoring was performed at all designated locations.
- 5.1.2 The noise monitoring schedule is presented in *Appendix H* and the monitoring results are summarized in the following sub-sections.

5.2 NOISE MONITORING RESULTS

- 5.2.1 In the Reporting Period, a total of **45** events noise measurements were carried out at the designated locations. The sound level meter was set in 1m from the exterior of the building façade including noise monitoring locations NM1, NM3, NM4, NM5, NM6, NM7, NM8 and NM9. Therefore, no façade correction (+3 dB(A)) is added according to acoustical principles and EPD guidelines. However, free-field status were performed at NM2a and NM10 and façade correction (+3 dB(A)) has added according to the requirement in this month. The noise monitoring results at the designated locations are summarized in *Tables 5-1 and 5-2*. The detailed noise monitoring data are presented in *Appendix I* and the relevant graphical plots are shown in *Appendix J*.

Table 5-1 Summary of Construction Noise Monitoring Results

| Construction Noise Level ($L_{eq30min}$), dB(A) | | | | | |
|---|-----------------|---------------------|-----|-----|---------------------|
| Date | NM1 | NM2a ^(*) | NM8 | NM9 | NM10 ^(*) |
| 5-Mar-18 | 60 | 70 | 63 | 65 | 69 |
| 16-Mar-18 | 61 | 68 | 62 | 63 | 66 |
| 22-Mar-18 | 58 | 72 | 56 | 58 | 59 |
| 28-Mar-18 | 51 | 68 | 59 | 61 | 61 |
| Limit Level | 75 dB(A) | | | | |

Remarks

(*) façade correction (+3 dB(A)) is added according to acoustical principles and EPD guidelines

Table 5-2 Summary of Construction Noise Monitoring Results

| Construction Noise Level ($L_{eq30min}$), dB(A) | | | | | |
|---|-----------------|-----|-----|-----|-----|
| Date | NM3 | NM4 | NM5 | NM6 | NM7 |
| 9-Mar-18 | 61 | 65 | 52 | 57 | 59 |
| 15-Mar-18 | 59 | 65 | 58 | 61 | 61 |
| 20-Mar-18 | 55 | 63 | 57 | 61 | 64 |
| 26-Mar-18 | 63 | 61 | 51 | 59 | 65 |
| 29-Mar-18 | 55 | 62 | 53 | 57 | 58 |
| Limit Level | 75 dB(A) | | | | |

- 5.2.2 As shown in *Tables 5-1 and 5-2*, no construction noise measurement results that exceeded the Limit Level were recorded. Moreover, no valid noise complaint (which triggered Action Level exceedance) was recorded in the Reporting Period.

6 WATER QUALITY MONITORING

6.1 GENERAL

6.1.1 In the Reporting Period, construction works under the project has been commenced in Contracts 2, 3, 4, 6, 7 and Contract SS C505 and water quality monitoring was performed at all designated locations. The water quality monitoring schedule is presented in *Appendix H*. The monitoring results are summarized in the following sub-sections.

6.2 RESULTS OF WATER QUALITY MONITORING

6.2.1 In the Reporting Period, a total of **fourteen (14)** sampling days was scheduled to carry out for all designated locations with their control stations. Since exceedances were recorded at WM3x, according to “*Event and Action Plan*” stipulation, 2 additional water quality monitoring day were conducted for WM3x and its control stations.

6.2.2 The key monitoring parameters including Dissolved Oxygen, Turbidity and Suspended Solids are summarized in *Tables 6-1 to 6-5*. Breaches of water quality monitoring criteria are shown in *Table 6-6*. Detailed monitoring database including in-situ measurements and laboratory analysis data are shown in *Appendix I* and the relevant graphical plot are shown in *Appendix J*.

Table 6-1 Water Quality Monitoring Results Associated of Contracts 2 and 3

| Date | Dissolved Oxygen (mg/L) | | | Turbidity (NTU) | | | Suspended Solids (mg/L) | | |
|-----------|-------------------------|--------|--------|-----------------|--------|--------|-------------------------|--------|--------|
| | WM4 | WM4-CA | WM4-CB | WM4 | WM4-CA | WM4-CB | WM4 | WM4-CA | WM4-CB |
| 1-Mar-18 | 6.0 | 8.7 | 6.3 | 6.7 | 2.4 | 6.0 | 10.5 | 2.5 | 6.0 |
| 3-Mar-18 | 6.1 | 8.7 | 6.2 | 8.3 | 2.2 | 8.4 | 18.0 | 4.5 | 8.0 |
| 5-Mar-18 | 5.7 | 7.8 | 5.8 | 12.0 | 3.4 | 6.5 | 13.0 | <2 | 9.0 |
| 7-Mar-18 | 5.6 | 6.8 | 5.0 | 13.1 | 2.9 | 10.1 | 12.0 | <2 | 13.5 |
| 9-Mar-18 | 6.8 | 9.2 | 6.9 | 15.6 | 2.3 | 11.9 | 9.0 | <2 | 11.5 |
| 12-Mar-18 | 5.6 | 7.3 | 5.2 | 15.6 | 3.4 | 10.2 | 15.0 | 3.5 | 11.0 |
| 14-Mar-18 | 5.6 | 6.2 | 4.3 | 10.5 | 7.0 | 9.2 | 9.5 | 3.0 | 9.5 |
| 16-Mar-18 | 5.8 | 7.0 | 5.7 | 13.8 | 5.3 | 5.2 | 26.0 | 2.5 | 4.0 |
| 19-Mar-18 | 9.7 | 9.1 | 7.7 | 25.7 | 2.5 | 5.6 | 37.0 | 3.0 | 7.5 |
| 21-Mar-18 | 7.9 | 8.9 | 8.4 | 15.1 | 1.7 | 9.0 | 22.0 | <2 | 5.5 |
| 23-Mar-18 | 7.3 | 8.0 | 7.5 | 32.1 | 4.3 | 8.5 | 31.5 | 5.0 | 13.0 |
| 27-Mar-18 | 4.7 | 7.1 | 5.3 | 21.6 | 4.7 | 6.4 | 19.5 | 5.0 | 4.5 |
| 29-Mar-18 | 5.2 | 6.8 | 5.1 | 17.7 | 6.3 | 11.2 | 18.5 | 3.5 | 8.5 |
| 31-Mar-18 | 6.0 | 7.4 | 6.8 | 14.8 | 4.9 | 7.7 | 17.5 | 2.0 | 7.0 |

Table 6-2 Water Quality Monitoring Results Associated of Contracts 6 and SS C505

| Date | Dissolved Oxygen (mg/L) | | Turbidity (NTU) | | Suspended Solids (mg/L) | |
|-----------|-------------------------|-------|-----------------|-------|-------------------------|-------|
| | WM1 | WM1-C | WM1 | WM1-C | WM1 | WM1-C |
| 1-Mar-18 | 7.0 | 13.9 | 7.9 | 8.1 | 7.0 | 3.5 |
| 3-Mar-18 | 5.8 | 13.5 | 9.2 | 7.4 | 14.0 | 6.5 |
| 5-Mar-18 | 5.5 | 12.4 | 10.9 | 8.1 | 13.5 | 2.5 |
| 7-Mar-18 | 6.3 | 11.7 | 14.2 | 9.2 | 16.0 | 2.5 |
| 9-Mar-18 | 8.8 | 12.7 | 28.3 | 8.5 | 21.0 | 3.0 |
| 12-Mar-18 | 5.7 | 10.2 | 5.3 | 5.9 | 4.0 | 4.0 |
| 14-Mar-18 | 6.7 | 10.5 | 23.5 | 11.5 | 16.0 | 8.5 |
| 16-Mar-18 | 4.4 | 9.8 | 26.3 | 26.6 | 13.5 | 19.5 |
| 19-Mar-18 | 7.6 | 8.6 | 8.7 | 18.7 | 17.5 | 16.0 |
| 21-Mar-18 | 8.4 | 8.9 | 25.5 | 13.9 | 17.0 | 15.0 |
| 23-Mar-18 | 10.8 | 8.6 | 29.3 | 28.3 | 24.5 | 53.0 |
| 27-Mar-18 | 4.5 | 9.5 | 5.4 | 8.2 | 3.5 | 10.0 |
| 29-Mar-18 | 5.3 | 11.5 | 8.5 | 9.3 | 7.0 | 4.0 |
| 31-Mar-18 | 6.5 | 8.3 | 8.2 | 12.2 | 6.0 | 12.0 |

Table 6-3 Water Quality Monitoring Results Associated only Contract 6

| Date | Dissolved Oxygen (mg/L) | | | | Turbidity (NTU) | | | | Suspended Solids (mg/L) | | | |
|-----------|-------------------------|---------|------|--------|-----------------|---------|------|--------|-------------------------|---------|------|--------|
| | WM2A(a) | WM2A-Cx | WM2B | WM2B-C | WM2A(a) | WM2A-Cx | WM2B | WM2B-C | WM2A(a) | WM2A-Cx | WM2B | WM2B-C |
| 1-Mar-18 | 8.0 | 8.0 | * | * | 4.6 | 13.5 | * | * | 2.0 | 4.5 | * | * |
| 3-Mar-18 | 7.5 | 7.8 | * | * | 7.9 | 14.5 | * | * | 3.5 | 7.0 | * | * |
| 5-Mar-18 | 7.2 | 7.4 | * | * | 6.2 | 18.9 | * | * | 7.5 | 10.5 | * | * |
| 7-Mar-18 | 6.9 | 6.6 | * | * | 7.3 | 16.8 | * | * | 3.0 | 5.0 | * | * |
| 9-Mar-18 | 9.0 | 9.0 | * | * | 5.0 | 79.9 | * | * | <2 | 34.5 | * | * |
| 12-Mar-18 | 7.1 | 7.3 | * | * | 5.7 | 8.8 | * | * | 2.5 | 3.5 | * | * |
| 14-Mar-18 | 7.7 | 7.1 | * | * | 20.7 | 22.3 | * | * | 11.5 | 10.5 | * | * |
| 16-Mar-18 | 6.7 | 6.0 | * | * | 18.3 | 21.4 | * | * | 11.5 | 6.0 | * | * |
| 19-Mar-18 | 8.4 | 8.3 | * | * | 7.4 | 9.5 | * | * | 11.0 | 17.0 | * | * |
| 21-Mar-18 | 8.8 | 8.8 | * | * | 13.3 | 21.8 | * | * | 11.0 | 44.5 | * | * |
| 23-Mar-18 | 9.5 | 8.6 | * | * | 25.3 | 21.9 | * | * | 11.0 | 22.0 | * | * |
| 27-Mar-18 | 7.7 | 6.1 | * | * | 9.7 | 19.8 | * | * | 6.5 | 9.5 | * | * |
| 29-Mar-18 | 7.5 | 5.9 | * | * | 12.1 | 14.8 | * | * | 7.0 | 6.5 | * | * |
| 31-Mar-18 | 7.5 | 9.3 | * | * | 10.4 | 16.0 | * | * | 13.0 | 3.5 | * | * |

Remarks: * water sampling was unable to carry out at WM2B and WM2B-C due to shallow water (water depth under 150mm)

Table 6-4 Water Quality Monitoring Results Associated Contracts 2 and 6

| Date | Dissolved Oxygen (mg/L) | | Turbidity (NTU) | | Suspended Solids (mg/L) | |
|-----------|-------------------------|-------|-----------------|-------|-------------------------|-------|
| | WM3x | WM3-C | WM3x | WM3-C | WM3x | WM3-C |
| 1-Mar-18 | 8.1 | 8.2 | <u>24.5</u> | 1.6 | <u>39.5</u> | 3.5 |
| 2-Mar-18 | # | # | 4.2 | 2.9 | 5.0 | 4.0 |
| 3-Mar-18 | 7.5 | 8.3 | <u>119.0</u> | 3.5 | <u>185.0</u> | 7.5 |
| 5-Mar-18 | 8.2 | 8.0 | 13.2 | 2.3 | 11.0 | 3.5 |
| 6-Mar-18 | # | # | 4.1 | 1.7 | 6.0 | 6.0 |
| 7-Mar-18 | 8.1 | 8.3 | 9.5 | 7.1 | 4.0 | 5.0 |
| 9-Mar-18 | 6.6 | 9.4 | 6.6 | 3.6 | 6.0 | 7.0 |
| 12-Mar-18 | 7.7 | 8.0 | 5.3 | 2.7 | 4.5 | 2.5 |
| 14-Mar-18 | 6.7 | 7.4 | 9.4 | 6.6 | 7.5 | 19.0 |
| 16-Mar-18 | 6.7 | 6.6 | 4.5 | 3.0 | <2 | <2 |
| 19-Mar-18 | 8.4 | 8.2 | 5.9 | 9.6 | 3.5 | 9.5 |
| 21-Mar-18 | 9.0 | 8.8 | 9.4 | 5.3 | <2 | 6.0 |
| 23-Mar-18 | 8.7 | 8.3 | 4.9 | 5.8 | 7.0 | 5.5 |
| 27-Mar-18 | 6.1 | 10.9 | 7.3 | 6.9 | 6.0 | 12.5 |
| 29-Mar-18 | 6.2 | 7.1 | 23.0 | 62.1 | 12.5 | 134.0 |
| 31-Mar-18 | 7.3 | 7.1 | 9.7 | 10.9 | 10.0 | 11.0 |

Remarks:

Additional water quality monitoring at the exceeded location(s) due to two consecutive monitoring days indicated Limit Level exceedance.
 bold with underline indicated Limit Level exceedance

Table 6-5 Action and Limit (A/L) Levels Exceedance Recorded

| Location | Dissolved Oxygen | | Turbidity | | Suspended Solids | | Total Exceedance | | Project Related exceedance | |
|------------------|------------------|----|-----------|----|------------------|----|------------------|----|----------------------------|----|
| | AL | LL | AL | LL | AL | LL | AL | LL | AL | LL |
| WM1 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| WM2A(a) | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| WM2B | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| WM3x | 0 | 0 | 0 | 2 | 0 | 2 | 0 | 4 | 0 | 0 |
| WM4 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| No of Exceedance | 0 | 0 | 0 | 2 | 0 | 2 | 0 | 4 | 0 | 0 |

- 6.2.3 In this Reporting Period, a total of four (4) Limit Level exceedances, namely two (2) Limit Level exceedance of turbidity and two (2) Limit Level exceedances of Suspended Solids were recorded for the Project and they are summarized in **Table 6-5**. Investigation Reports for all water quality exceedances were completed by ET. Investigation results revealed that the Contractor had properly implemented water quality mitigation measures such as well-maintained the wastewater treatment facility and covered the expose area with impervious sheet. It was concluded that the exceedances recorded at WM3x were not caused by the works under the Project.
- 6.2.4 NOE was issued to relevant parties upon confirmation of the monitoring result. The investigation results and summary of exceedances are summarized in **Table 6-6**. The details of the completed investigation reports for the exceedances are attached in **Appendix N**.

Table 6-6 Summary of Water Quality Exceedance in the Reporting Period

| Date of Exceedance | Location | Exceeded Parameter | Cause of Water Quality Exceedance In Brief |
|--------------------|----------|--------------------|--|
| 1 and 3 March 2018 | WM3x | NTU & SS | Upon detection of the exceedances, inspection was carried out at the channel adjacent to related site areas of Contract 2 and Contract 6, no deteriorated water quality was observed from both Sites. Moreover, weekly site inspection revealed that both Contractors had properly implemented water quality mitigation measures and no adverse water quality impact was recorded. It is considered that the exceedances were related to other source of turbid water, possibly from storm water of Sha Tau Kok Road or adjacent villages and not caused by the works under the Project. |

7 ECOLOGY MONITORING

7.1 GENERAL

- 7.1.1 Ecology monitoring for woodland compensation shall be conducted at bi-monthly interval for the first year and the monitoring frequency would be reduced to quarterly from the second year.
- 7.1.2 The Ecology Monitoring for period of December 2017 to February 2018 was carried out on 8th and 22nd January 2018 by transects inspection and quadrat monitoring. Therefore, the Quarterly Ecological Monitoring Report (Dec 2017 - Feb 2018) was submitted to EPD in March 2018 as standalone as supplementary of the EM&A Report.

8 WASTE MANAGEMENT

8.1 GENERAL WASTE MANAGEMENT

8.1.1 Waste management was carried out in accordance with the Waste Management Plan (WMP) for each contract.

8.2 RECORDS OF WASTE QUANTITIES

8.2.1 All types of waste arising from the construction work are classified into the following:

- Construction & Demolition (C&D) Material;
- Chemical Waste;
- General Refuse; and
- Excavated Soil.

8.2.2 The quantities of waste for disposal in this Reporting Period are summarized in *Tables 8-1* and *8-2* and the Monthly Summary Waste Flow Table is shown in *Appendix L*. Whenever possible, materials were reused on-site as far as practicable.

Table 8-1 Summary of Quantities of Inert C&D Materials for the Project

| Type of Waste | Contract 2 | | Contract 3 | | Contract 4 | | Contract 6 | | Contract 7 | | Contract SS C505 | | Total Qty. |
|---|------------|---|------------|-------------------|------------|-------------------|------------|-------------------|------------|-------------------|------------------|-------------------|------------|
| | Qty. | Disposal location | Qty. | Disposal location | Qty. | Disposal location | Qty. | Disposal location | Qty. | Disposal location | Qty. | Disposal location | |
| C&D Materials (Inert) (in '000m ³) | 39.6460 | -- | 1.524 | -- | 0 | -- | 3.269 | -- | 0.005 | -- | 11.241 | -- | 55.685 |
| Reused in this Contract (Inert) (in '000 m ³) | 0 | -- | 0.120 | -- | 0 | -- | 1.581 | -- | 0 | -- | 0.225 | -- | 1.926 |
| Reused in other Contracts/ Projects (Inert) (in '000 m ³) | 3.3460 | Recycling facility as approved alternative site | 0 | -- | 0 | -- | 0.969 | NENT | 0 | -- | 0 | -- | 4.315 |
| Disposal as Public Fill (Inert) (in '000 m ³) | 36.3000 | Tuen Mun 38 | 1.263 | Tuen Mun 38 | 0 | -- | 0.719 | Tuen Mun 38 | 0.005 | Tuen Mun 38 | 10.186 | TKO 137 | 48.473 |

Table 8-2 Summary of Quantities of C&D Wastes for the Project

| Type of Waste | Contract 2 | | Contract 3 | | Contract 4 | | Contract 6 | | Contract 7 | | Contract SS C505 | | Total Quantity |
|---|------------|--------------------|------------|-------------------|------------|-------------------|------------|--------------------|------------|--------------------|------------------|--------------------|----------------|
| | Qty. | Disposal location | Qty. | Disposal location | Qty. | Disposal location | Qty. | Disposal location | Qty. | Disposal location | Qty. | Disposal location | |
| Recycled Metal ('000kg) # | 36.000 | Licensed collector | 0 | - | 0 | -- | 0 | -- | 6 | Licensed collector | 220.860 | Licensed collector | 262.86 |
| Recycled Paper / Cardboard Packing ('000kg) # | 0.3050 | Licensed collector | 0 | - | 0 | - | 0.380 | Licensed collector | 0.15 | Licensed collector | 0.830 | Licensed collector | 1.665 |
| Recycled Plastic ('000kg) # | 2.7000 | Licensed collector | 0 | - | 0 | -- | 0 | -- | 0.001 | Licensed collector | 0.005 | Licensed collector | 2.706 |
| Chemical Wastes ('000kg) # | 9.9040 | Licensed collector | 0 | - | 0 | -- | 0 | -- | 0 | -- | 0 | -- | 9.904 |
| General Refuses ('000m ³) | 0.6290 | NENT | 0.085 | NENT | 0 | -- | 0.725 | NENT | 0.2 | NENT | 2.711 | NENT | 4.35 |

Remark #: Unit of recycled metal, recycled paper/ cardboard packing, recycled plastic and chemical waste for Contract 3 was in ('000m³).

9 SITE INSPECTION

9.1 REQUIREMENTS

9.1.1 According to the approved EM&A Manual, the environmental site inspection shall be formulation by ET Leader. Weekly environmental site inspections should carry out to confirm the environmental performance.

9.2 FINDINGS / DEFICIENCIES DURING THE REPORTING MONTH

Contract 2

9.2.1 In the Reporting Period, joint site inspection for Contract 2 to evaluate the site environmental performance has been carried out by the RE, IEC, ET and the Contractor on **1, 9, 16, 23 and 28 March 2018**. No non-compliance was noted.

9.2.2 The findings / deficiencies of **Contract 2** that observed during the weekly site inspection are listed in **Table 9-1**.

Table 9-1 Site Observations for Contract 2

| Date | Findings / Deficiencies | Follow-Up Status |
|---------------|--|--|
| 1 March 2018 | <ul style="list-style-type: none"> No adverse environmental issue was observed. | NA |
| 9 March 2018 | <ul style="list-style-type: none"> Wheel washing facility was observed out of work. The Contractor was advised to provide proper mitigation for wheel washing. (Mid-Vent) The Contractor was reminded to keep all pH record properly. | <ul style="list-style-type: none"> Wheel washing was provided at site entrance. Not required for reminder. |
| 16 March 2018 | <ul style="list-style-type: none"> Mud trails were observed at site entrance. The Contractor was advised to clean it to avoid dust emission. (Mid-Vent) Accumulation of construction and general waste were observed mixed together. The Contractor was advised to perform on-site sorting and dispose waste regularly. (Mid-Vent) The Contractor was reminded to ensure all pH value of discharge water comply with WPCO standard. | <ul style="list-style-type: none"> Each vehicle is wheel washed before leaving the MVP site and no mud trail was found at the site entrance. General refuses are segregated from the C&D wastes. Not required for reminder. |
| 23 March 2018 | <ul style="list-style-type: none"> General refuse cumulated inside the storage pit was observed. General refuse cumulated inside the pit should be cleaned. (North Portal) Mud and sediment cumulated inside the store basin should be cleaned. (North Portal) Heavy smoke emitted from cherry picker was observed. Proper maintenance should be provided to maintain plants using on-site are in good condition. (North Portal) | <ul style="list-style-type: none"> General refuses have been removed. The mud and sediment accumulated at the bottom of the basin has been removed. |
| 28 March 2018 | <ul style="list-style-type: none"> Dry haul road was observed, the Contractor should provide water spraying to minimize dust generation from the haul road. (South Portal) Dirt and debris on pedestrian road at the site exit was observed. The Contractor should clean up the dusty material and maintain cleanliness. (Admin Building) | <ul style="list-style-type: none"> The Contractor will continue to provide water spraying to minimize dust generation from the haul road. The dirt and debris have been removed. |

Contract 3

9.2.3 In the Reporting Period, joint site inspection for Contract 3 to evaluate the site environmental performance has been carried out by the RE, IEC, ET and the Contractor on **1, 8, 15, 21 and 29 March 2018**. No non-compliance was noted.

9.2.4 The findings / deficiencies of **Contract 3** that observed during the weekly site inspection are listed in **Table 9-2**.

Table 9-2 Site Observations for Contract 3

| Date | Findings / Deficiencies | Follow-Up Status |
|-------------|--|---|
| 1 Mar 2018 | <ul style="list-style-type: none"> No adverse environmental issue was observed. | NA |
| 8 Mar 2018 | <ul style="list-style-type: none"> The Contractor was reminded to maintain the sandbag bund at ID4. | <ul style="list-style-type: none"> Not required for reminder. |
| 15 Mar 2018 | <ul style="list-style-type: none"> No adverse environmental issue was observed. | NA |
| 21 Mar 2018 | <ul style="list-style-type: none"> Water dripping from the viaduct was observed, the Contractor should properly remove any stagnant water on the viaduct after rain. (Tai Wo Service Road East) Excavation next to the channel was observed, the Contractor should provide mitigation measures to prevent muddy runoff entering the river channel. The Contractor was reminded to provide dust suppression measure during dry season. | <ul style="list-style-type: none"> Concrete bund was provided to prevent water leaking from the viaduct. The exposed slopes are covered with tarpaulin sheets to avoid muddy runoff entering the river channel. Not required for reminder. |
| 29 Mar 2018 | <ul style="list-style-type: none"> The Contractor was reminded to improve and maintain the setup of water diversion at BC02. | <ul style="list-style-type: none"> Not required for reminder. |

Contract 4

9.2.5 In the Reporting Period, joint site inspection for Contract 4 to evaluate the site environmental performance has been carried out by the RE, IEC, ET and the Contractor on **2, 9, 16, 19 and 28 March 2018**. No non-compliance was noted.

9.2.6 The findings / deficiencies of **Contract 4** that observed during the weekly site inspection are listed in **Table 9-3**.

Table 9-3 Site Observations for Contract 4

| Date | Findings / Deficiencies | Follow-Up Status |
|-------------|--|--|
| 2 Mar 2018 | <ul style="list-style-type: none"> No adverse environmental issue was observed. | <ul style="list-style-type: none"> NA |
| 9 Mar 2018 | <ul style="list-style-type: none"> No adverse environmental issue was observed. | <ul style="list-style-type: none"> NA |
| 16 Mar 2018 | <ul style="list-style-type: none"> No adverse environmental issue was observed. | <ul style="list-style-type: none"> NA |
| 19 Mar 2018 | <ul style="list-style-type: none"> No adverse environmental issue was observed. | <ul style="list-style-type: none"> NA |
| 28 Mar 2018 | <ul style="list-style-type: none"> No adverse environmental issue was observed. | <ul style="list-style-type: none"> NA |

Contract 6

9.2.7 In the Reporting Period, joint site inspection for Contract 6 to evaluate the site environmental performance has been carried out by the RE, IEC, ET and the Contractor on **2, 8, 15, 22 and 29 March 2018**. No non-compliance was noted.

9.2.8 The findings / deficiencies of **Contract 6** that observed during the weekly site inspection are listed in **Table 9-4**.

Table 9-4 Site Observations for Contract 6

| Date | Findings / Deficiencies | Follow-Up Status |
|-------------|--|---|
| 2 Mar 2018 | <ul style="list-style-type: none"> The Contractor was reminded to maintain the cleanliness at site exit and public footpath at Gate 1 and Gate 2. | <ul style="list-style-type: none"> Not required for reminder. |
| 8 Mar 2018 | <ul style="list-style-type: none"> The Contractor was reminded at maintain the cleanliness at site exit in Gate 1. | <ul style="list-style-type: none"> Not required for reminder. |
| 15 Mar 2018 | <ul style="list-style-type: none"> Dirt and debris on pedestrian road were observed at Gate 1, the Contractor should maintain the cleanliness at the pedestrian road and ensure no surface runoff entering the public area from the site. The Contractor was reminded to maintain and clean the U-channel for water diversion. (Location: D08) | <ul style="list-style-type: none"> The pedestrian road is maintained clean and tidy. Not required for reminder. |
| 22 Mar 2018 | <ul style="list-style-type: none"> The Contractor was reminded to maintain cleanliness at site exit and public area. | <ul style="list-style-type: none"> Not required for reminder. |
| 29 Mar 2018 | <ul style="list-style-type: none"> No adverse environmental issue was observed. | <ul style="list-style-type: none"> NA |

Contract SS C505

9.2.9 In the Reporting Period, joint site inspection for Contract SS C505 to evaluate the site environmental performance has been carried out by the RE, ET and the Contractor on **7, 14, 21 and 28 March 2018** in which IEC joined the site inspection on **28 March 2018**. No non-compliance was noted.

9.2.10 The findings / deficiencies of **Contract SS C505** that observed during the weekly site inspection are listed in **Table 9-5**.

Table 9-5 Site Observations for Contract SS C505

| Date | Findings / Deficiencies | Follow-Up Status |
|-------------------------------------|---|---|
| 28 Feb 2018 (last reporting period) | <ul style="list-style-type: none"> Food wastes were observed on the roof of PTB. The Contractor was advised to perform housekeeping regularly. The Contractor was reminded to cover stockpiles entirely after construction work. | <ul style="list-style-type: none"> Food wastes were removed and disposed properly. Not required for reminder. |
| 7 Mar 2018 | <ul style="list-style-type: none"> The Contractor was reminded to clean the stagnant water on the ground of PTB. | <ul style="list-style-type: none"> Not required for reminder. |
| 14 Mar 2018 | <ul style="list-style-type: none"> No adverse environmental issue was observed. | <ul style="list-style-type: none"> NA |
| 21 Mar 2018 | <ul style="list-style-type: none"> Concrete breaking without water spraying was observed at stockpile area. The Contractor was advised to provide water spraying for dusty activity to avoid dust emission. | <ul style="list-style-type: none"> Water spraying was implemented during concrete activity. |
| 28 Mar 2018 | <ul style="list-style-type: none"> Oil leakage was observed on the ground of 1/F in front of PTB. The Contractor should clean the oil leakage and dispose of as chemical wastes. Besides, the Contractor should also provide proper label for chemical container and place chemical containers inside drip tray. | <ul style="list-style-type: none"> To be followed. |

Contract 7

9.2.11 In the Reporting Period, joint site inspection for Contract 7 to evaluate the site environmental performance has been carried out by the RE, IEC, ET and the Contractor on **2, 9, 16, 22 and 28 March 2018**. No non-compliance was noted.

9.2.12 The findings / deficiencies of **Contract 7** that observed during the weekly site inspection are listed in **Table 9-6**.

Table 9-6 Site Observations for Contract 7

| Date | Findings / Deficiencies | Follow-Up Status |
|-------------|--|--|
| 2 Mar 2018 | <ul style="list-style-type: none"> No adverse environmental issue was observed during site inspection. | <ul style="list-style-type: none"> NA. |
| 9 Mar 2018 | <ul style="list-style-type: none"> The Contractor was reminded to provide proper mitigation measure along site boundary near Bridge E to avoid potential runoff out of site. | <ul style="list-style-type: none"> Not required for reminder. |
| 16 Mar 2018 | <ul style="list-style-type: none"> Accumulation of general waste was observed on the ground. The Contractor was advised to dispose it regularly. Open stockpiles were observed near bridge E. The Contractor was advised to cover it to prevent dust emission. | <ul style="list-style-type: none"> The scattered general waste was cleaned. Stockpiles are covered to prevent dust emission. |
| 22 Mar 2018 | <ul style="list-style-type: none"> The Contractor was reminded that wastewater should be treated before discharge and to comply with the discharge license. Besides, wastewater treatment facility should be provided and maintained. Wet season is coming, it was reminded that preventive measures for surface runoff should be enhanced and maintained. | <ul style="list-style-type: none"> Not required for reminder. Not required for reminder. |
| 28 Mar 2018 | <ul style="list-style-type: none"> Leakage of waste water from sedimentation tank was observed near site entrance. The Contractor was advised to have regular maintenance on sedimentation tanks near site entrance. The Contractor was reminded to provide proper mitigation measure along site boundary to avoid potential runoff out of site. The Contractor was reminded to remove sediment at discharge area near site entrance. | <ul style="list-style-type: none"> Proper maintenance was carried out on the sedimentation tanks. Not required for reminder. Not required for reminder. |

9.2.13 General housekeeping such as daily site tidiness and cleanliness should be maintained for all Contracts. Furthermore, the Contractors were reminded to implement Waste Management Plan of the Project.

10 ENVIRONMENTAL COMPLAINT AND NON-COMPLIANCE

10.1 ENVIRONMENTAL COMPLAINT, SUMMONS AND PROSECUTIONS

10.1.1 In the Reporting Period, two (2) documented environmental complaints were received under the EM&A program of the Project which related to dust and water quality issue. No summons and prosecution under the EM&A Programme was lodged for all Contracts. The status of the outstanding investigation report in previous months is summarized below.

| Date of complaint | Complaint Detail | Investigation Status |
|---|---|--|
| 24 January 2018 (previous reporting period) | A complaint was raised by EPD regarding observations of some spoils was dropped into the sea during the offloading operation at Cheung Sha Wan Pier. | Investigation was carried out at Cheung Sha Wan Pier on 9 Feb. The IR revealed that the operation of the jetty is managed by Tapbo Civil Engineering Company Limit as a transfer station for unloading excavated materials from various sources and it was not a newly constructed barging point for the Project use. The unloaded materials of Contract 2 will be subsequently delivered to the designated disposal ground, TM38 or TKO137. Dust mitigation measures and preventive measures to avoid spoil from dropping into the sea were provided during spoils offloading. It is considered that no breaches of EP's conditions and improper disposal were involved. The IR was completed by ET without comment by IEC which enclosed in <i>Appendix O</i> . |
| 4 March 2018 | A public complaint was received via 1823 regarding the cleanliness of Lin Ma Hang Road. (Dust and Water Quality) | Investigation was carried out for related Contract 6, Contract 7 and Contract SS C505 accordingly. The IR revealed that the conditions of all site exits under the project were well maintained without mud and debris and no excessive water spraying and slurry was found on LMH road. However, a deficiency at Gate 1 under Contract 6 was observed and rectified immediately without affecting the public. Since there were many other heavy vehicles apart from the project using LMH Road and certain number of unknown exit sites without proper management along LMH Road, it is considered that the complaint was not related to the works under the Project. The IR was completed by ET without comment by IEC which enclosed in <i>Appendix O</i> . |
| 28 February 2018 (received by ET on 6 Mar 2018) | A public complaint was received from Project Hotline regarding the cleanliness of Sha Tau Kok (STK) Road – Ma Mei Ha Section (Dust and Water Quality) | Investigation was carried out for related Contract 2 and Contract 6 accordingly. The IR revealed that the Contractors have been well maintained the wheel washing facilities and no dust and soil carrying by site vehicles to STK road were observed. The complaint was suspected to be caused by frequent use of dump truck transporting loose material to NENT and the majority of dump truck was not belong to LT/HYW project. The IR was completed by ET without comment by IEC which enclosed in <i>Appendix O</i> . |

10.1.2 The statistical summary of environmental complaint is presented in *Tables 10-1, 10-2 and 10-3*.

Table 10-1 Statistical Summary of Environmental Complaints

| Reporting Period | Contract No | Environmental Complaint Statistics | | | Project related complaint |
|---------------------------|-------------|------------------------------------|------------|---|---|
| | | Frequency | Cumulative | Complaint Nature | |
| 19 May 2014 – 28 Feb 2018 | Contract 2 | 0 | 33 | <ul style="list-style-type: none"> • (18) Water Quality • (8) Dust • (5) Noise • (1) dust & noise • (1) waste management | (6) water quality (2) dust (1) noise |
| 06 Nov 2013 – 28 Feb 2018 | Contract 3 | 0 | 6 | <ul style="list-style-type: none"> • (2) Dust • (3) Water quality • (1) Noise | 0 |
| 16 Aug 2013 – 28 Feb 2018 | Contract 5 | 0 | 4 | <ul style="list-style-type: none"> • (3) Dust • (1) Noise | 0 |
| 16 Aug 2013 – 28 Feb 2018 | Contract 6 | 0 | 36 | <ul style="list-style-type: none"> • (23) Water Quality • (8) Dust • (3) Noise • (1) Nuisance • (1) Noise and dust | (7) water quality (3) dust (1) Nuisance (1) Water quality and dust |
| 15 Feb 2016 – 28 Feb 2018 | Contract 7 | 0 | 2 | <ul style="list-style-type: none"> • (1) Noise • (1) Water quality and dust | (1) Water quality and dust |
| 16 Aug 2013 – 28 Feb 2018 | SS C505 | 0 | 3 | <ul style="list-style-type: none"> • (1) Noise • (1) dust • (1) Water quality and dust | (1) Water quality and dust |
| 1 – 31 Mar 2018 | Contract 2 | 1 | 34 | <ul style="list-style-type: none"> • (18) Water Quality • (8) Dust • (5) Noise • (1) dust & noise • (1) waste management • (1) Water quality and dust | NA |
| | Contract 3 | 0 | 6 | <ul style="list-style-type: none"> • (2) Dust • (3) Water quality • (1) Noise | NA |
| | Contract 4 | 0 | 0 | NA | NA |
| | Contract 6 | 2 | 38 | <ul style="list-style-type: none"> • (23) Water Quality • (8) Dust • (3) Noise • (1) Nuisance • (1) Noise and dust • (2) Water quality and dust | NA |
| | Contract 7 | 1 | 3 | <ul style="list-style-type: none"> • (1) Noise • (2) Water quality and dust | NA |
| | SS C505 | 1 | 4 | <ul style="list-style-type: none"> • (1) Noise • (1) dust • (2) Water quality and dust | NA |

Table 10-2 Statistical Summary of Environmental Summons

| Reporting Period | Contract No | Environmental Summons Statistics | | |
|---------------------------|-------------|----------------------------------|------------|--|
| | | Frequency | Cumulative | Complaint Nature |
| 19 May 2014 – 28 Feb 2018 | Contract 2 | 0 | 1 | contravening the Water Pollution Control (General) Regulations |

| Reporting Period | Contract No | Environmental Summons Statistics | | |
|---------------------------|-------------|----------------------------------|------------|------------------|
| | | Frequency | Cumulative | Complaint Nature |
| 06 Nov 2013 – 28 Feb 2018 | Contract 3 | 0 | 0 | NA |
| 16 Aug 2013 – 28 Feb 2018 | Contract 5 | 0 | 0 | NA |
| 16 Aug 2013 – 28 Feb 2018 | Contract 6 | 0 | 0 | NA |
| 15 Feb 2016 – 28 Feb 2018 | Contract 7 | 0 | 0 | NA |
| 16 Aug 2013 – 28 Feb 2018 | SS C505 | 0 | 0 | NA |
| 1 – 31 Mar 2018 | Contract 2 | 0 | 1 | NA |
| | Contract 3 | 0 | 0 | NA |
| | Contract 4 | 0 | 0 | NA |
| | Contract 6 | 0 | 0 | NA |
| | Contract 7 | 0 | 0 | NA |
| | SS C505 | 0 | 0 | NA |

Table 10-3 Statistical Summary of Environmental Prosecutions

| Reporting Period | Contract No | Environmental Prosecutions Statistics | | |
|---------------------------|-------------|---------------------------------------|------------|--|
| | | Frequency | Cumulative | Complaint Nature |
| 19 May 2014 – 28 Feb 2018 | Contract 2 | 0 | 1 | contravening the Water Pollution Control (General) Regulations |
| 06 Nov 2013 – 28 Feb 2018 | Contract 3 | 0 | 0 | NA |
| 16 Aug 2013 – 28 Feb 2018 | Contract 5 | 0 | 0 | NA |
| 16 Aug 2013 – 28 Feb 2018 | Contract 6 | 0 | 0 | NA |
| 15 Feb 2016 – 28 Feb 2018 | Contract 7 | 0 | 0 | NA |
| 16 Aug 2013 – 28 Feb 2018 | SS C505 | 0 | 0 | NA |
| 1 – 31 Mar 2018 | Contract 2 | 0 | 1 | NA |
| | Contract 3 | 0 | 0 | NA |
| | Contract 4 | 0 | 0 | NA |
| | Contract 6 | 0 | 0 | NA |
| | Contract 7 | 0 | 0 | NA |
| | SS C505 | 0 | 0 | NA |

11 IMPLEMENTATION STATUS OF MITIGATION MEASURES

11.1 GENERAL REQUIREMENTS

- 11.1.1 The environmental mitigation measures that recommended in the Implementation Schedule for Environmental Mitigation Measures (ISEMM) in the approved EM&A Manual covered the issues of dust, noise, water and waste and they are summarized presented in *Appendix M*.
- 11.1.2 All contracts under the Project shall be implementing the required environmental mitigation measures according to the approved EM&A Manual as subject to the site condition. Environmental mitigation measures generally implemented by Contracts 2, 3, 4, 5, 6, 7 and Contract SS C505 in this Reporting Period are summarized in *Table 11-1*.

Table 11-1 Environmental Mitigation Measures

| Issues | Environmental Mitigation Measures |
|-------------------------------|--|
| Water Quality | <ul style="list-style-type: none"> Wastewater to be treated by the wastewater treatment facilities i.e. sedimentation tank or similar facility before discharge. |
| Air Quality | <ul style="list-style-type: none"> Maintain damp / wet surface on access road Low vehicular speed within the works areas. All vehicles must use wheel washing facility before off site Sprayed water during breaking works A cleaning truck was regularly performed on the public road to prevent fugitive dust emission |
| Noise | <ul style="list-style-type: none"> Restrain operation time of plants from 07:00 to 19:00 on any working day except for Public Holiday and Sunday. Keep good maintenance of plants Place noisy plants away from residence or school Provide noise barriers or hoarding to enclose the noisy plants or works Shut down the plants when not in used. |
| Waste and Chemical Management | <ul style="list-style-type: none"> On-site sorting prior to disposal Follow requirements and procedures of the “Trip-ticket System” Predict required quantity of concrete accurately Collect the unused fresh concrete at designated locations in the sites for subsequent disposal |
| General | <ul style="list-style-type: none"> The site was generally kept tidy and clean. |

11.2 TENTATIVE CONSTRUCTION ACTIVITIES IN THE COMING MONTH

- 11.2.1 As advised by the ER, the construction works under Contract 5 was substantially completed on 31 August 2016. Construction activities for other Contracts in the coming month are listed below:

Contract 2

| | |
|-----------------|--|
| Mid-Vent Portal | <ul style="list-style-type: none"> Construction of Cut and Cover structure and backfilling Construction of adit enlargement internal structure Stud tunnel internal structure and E&M installation Ventilation building superstructure, fence wall, internal fitting out and E&M installation Structure connecting adit tunnel and ventilation building Permanent drainage and underground utilities |
| North Portal | <ul style="list-style-type: none"> Construction of retaining wall, permanent drainage, site formation and slip road Tunnel waterproofing, lining, backfilling and E&M installation Construction of cross passage and internal structure TBM North drive excavation North ventilation building superstructure, internal structure and backfilling Drainage cleansing and construction of temporary utility bridge across the mid-platform |
| South Portal | <ul style="list-style-type: none"> Waterproofing and lining activities inside the tunnel |

| | |
|----------------|--|
| | <ul style="list-style-type: none"> • Construction of tunnel cross passage, tunnel backfilling and E&M installation • South ventilation building fitting out and E&M installation • Construction of retaining walls and backfilling activities |
| Admin Building | <ul style="list-style-type: none"> • Construction of permanent drainage, permanent drainage, fence wall and underground utilities • Building internal structure, fitting out, E&M installation and soft landscaping |

Contract 3

- Cable detection and trial trenches
- Remaining works on new Footbridge
- Noise barrier construction
- Road pavement works
- Demolition of Existing Kiu Tau Vehicular Bridge
- Water main laying works
- Installation of Noise barrier steel column & panel, and sign gantry (on Grade and on bridge deck)
- Parapet Installation on bridge deck
- Road Drainage Works
- Construction of profile barrier & Planter wall on Bridge deck
- Stressing of external tendon
- Bitumen paving on bridge deck
- Installation of deck cell light inside the bridge deck
- Installation of movement joint on the bridge
- Construction of retaining wall behind abutment
- Landscaping works

Contract 4

- System design and testing
- E&M installation at Admin Building
- E&M installation at Ventilation Building
- High mast erection
- E&A installation at OHVD in tunnel

Contract 6

- Bridge construction
- Tunnel Works
- Sewage Treatment Plant Construction
- Tunnel Ventilation Building Construction
- Slip Road/At-grade Road/Periphery Road Construction

Contract 7

- U-trough and abutment construction at Bridge E
- Deck construction at Bridge A and E
- Profile barrier construction at Bridge B and D
- Construction of Façade and BMU at Bridge C

Contract SS C505

- Building no. 1, 2, 3, 4, 5, 6, 7, 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 21, 22, 23, 24, 25, 26, 27, 28, 29, 30, 31 and 41 constructions
- Constructions of Steel Canopies (Building no. 32, 33, 34 and 35)
- Constructions of Master Water Meter Room 1, 2 and 3 (Building no. 42, 43, 44)
- Tower crane operation
- Bridge 1 - 5 construction works including retaining wall, road and finishes works

- Steel Canopies construction
- Underground drainage works, Road Works, CLP Cable laying and Landscaping
- Formwork and falsework for PTB's slab and internal wall construction
- Construction PTB M/F, 1/F, 2/F and Roof flat slab
- Construction PTB non-structural wall, Underground Drainage and Utilities, Fence Wall, Southern Entrance Construction
- Backfilling works
- PTB Major Plant Rooms ABWF & MEP Installation, Lift and Escalator Installation by NSC
- Integrated ABWF & MEP Works in PTB, Building no. 1, 2, 3, 4, 5, 6, 7, 11, 14, 18, 36 and 41
- Elevated Walkway E1, E2, E3 and E4 construction
- Tower Crane Dismantling Works

11.3 KEY ISSUES FOR THE COMING MONTH

- 11.3.1 Key issues to be considered in the coming month for Contracts 2, 3, 4, 6, 7 and SS C505 include:
- Implementation of control measures for rainstorm;
 - Regular clearance of stagnant water during wet season;
 - Implementation of dust suppression measures at all times;
 - Potential wastewater quality impact due to surface runoff;
 - Potential fugitive dust quality impact due from the dry/loose/exposure soil surface/dusty material;
 - Disposal of empty engine oil containers within site area;
 - Ensure dust suppression measures are implemented properly;
 - Sediment catch-pits and silt removal facilities should be regularly maintained;
 - Management of chemical wastes;
 - Discharge of site effluent to the nearby wetland, stockpiling or disposal of materials, and any dredging or construction area at this area are prohibited;
 - Follow-up of improvement on general waste management issues; and
 - Implementation of construction noise preventative control measures

12 CONCLUSIONS AND RECOMMENDATIONS

12.1 CONCLUSIONS


- 12.1.1 This is the 56th monthly EM&A report presenting the monitoring results and inspection findings for the Reporting Period from 1 to 31 March 2018.
- 12.1.2 For air quality monitoring, no 1-hour TSP and 24-hour TSP monitoring results triggered the Action or Limit Levels were recorded.
- 12.1.3 In the Reporting Period, no construction noise measurement results that exceeded the Limit Level were recorded. Moreover, no valid noise complaint which triggered an Action Level exceedance was recorded.
- 12.1.4 For water quality monitoring, a total of 4 LL exceedances, namely 2 LL exceedance of turbidity and 2 LL exceedances of Suspended Solids were recorded. Investigation reports revealed that the Contractor had properly implemented water quality mitigation measures such as well-maintained the wastewater treatment facility and covered the expose area with impervious sheet. It was concluded that all the exceedances were not related to the works under the Project.
- 12.1.5 In this Reporting Period, 2 environmental complaints were received regarding to the dust and water quality issue on Sha Tau Kok Road and Lin Ma Hang Road. The investigation for the complaint was completed by ET. The IRs revealed that the conditions of all site exits under the Project were well maintained without mud and debris and no excessive water spraying and slurry was found on the complaint roads. Since there were many other heavy vehicles apart from the project using complaint roads and mitigation measures were properly implemented by the Contractor, it is considered that the complaints were not related to the works under the Project.
- 12.1.6 In the Reporting Period, no environmental summons and prosecution under the EM&A Programme was lodged for all Contracts.
- 12.1.7 During the Reporting Period, weekly joint site inspection by the RE, IEC, ET with the relevant Main-contractor were carried out for Contracts 2, 3, 4, 6 and 7 in accordance with the EM&A Manual stipulation. For Contract SS C505, weekly joint site inspection was carried out by the RE, IEC, ET and main-contractor whereas IEC performed monthly site inspection. No non-compliance observed during the site inspection.

12.2 RECOMMENDATIONS

- 12.2.1 As wet season is approaching, preventive measures for muddy water or other water pollutants from site surface flow to local stream such as Kong Yiu Channel, Ma Wat Channel, Ping Yuen River, Kwan Tei River or public area should be properly maintained. The Contractors should paid special attention on water quality mitigation measures and fully implement according ISEMM of the EM&A Manual, in particular for working areas near Ma Wat Channel and Ping Yuen River.
- 12.2.2 In addition, all effluent discharge shall be ensure to fulfill Technical Memorandum of Effluent Discharged into Drainage and Sewerage Systems, inland and Coastal Waters criteria or discharge permits stipulation.
- 12.2.3 Construction noise would be a key environmental issue during construction work of the Project. Noise mitigation measures such as using quiet plants should be implemented in accordance with the EM&A requirement.
- 12.2.4 Since most of construction sites under the Project are located adjacent to villages, the Contractors should fully implement air quality mitigation measures to reduce construction dust emission.
- 12.2.5 Furthermore, daily cleaning and weekly tidiness shall be properly performed and maintained. In addition, mosquito control should be kept to prevent mosquito breeding on site.

Appendix A


Layout plan of the Project

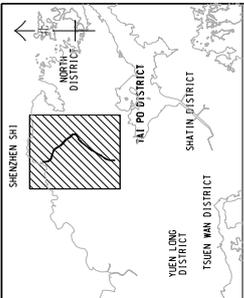

LOCATION PLAN
SCALE 1 : 3000


LEGEND:
--- UNDERGROUND WORKS

| | |
|---------------------|---|
| DESIGN NO. | 60212563/PLP/001 |
| DATE | |
| SCALE | |
| PROJECT | |
| DESIGNER | 土木工程師事務所 CEDD Civil Engineering and Development Department |
| CLIENT | LIANJIAN/HEUNG YEEN WAI BOUNDARY CROSS BRIDGES (HKSAR PORTION) (SITE FORMATION AND INFRASTRUCTURES) DESIGN AND CONSTRUCTION |
| PROJECT LAYOUT PLAN | |
| AECOM | |
| DRGNO. | 60212563/PLP/001 |
| DATE | |
| SCALE | |
| PROJECT | |
| DESIGNER | 土木工程師事務所 CEDD Civil Engineering and Development Department |
| CLIENT | LIANJIAN/HEUNG YEEN WAI BOUNDARY CROSS BRIDGES (HKSAR PORTION) (SITE FORMATION AND INFRASTRUCTURES) DESIGN AND CONSTRUCTION |
| PROJECT LAYOUT PLAN | |
| AECOM | |
| DRGNO. | 60212563/PLP/001 |
| DATE | |
| SCALE | |
| PROJECT | |
| DESIGNER | 土木工程師事務所 CEDD Civil Engineering and Development Department |
| CLIENT | LIANJIAN/HEUNG YEEN WAI BOUNDARY CROSS BRIDGES (HKSAR PORTION) (SITE FORMATION AND INFRASTRUCTURES) DESIGN AND CONSTRUCTION |
| PROJECT LAYOUT PLAN | |
| AECOM | |

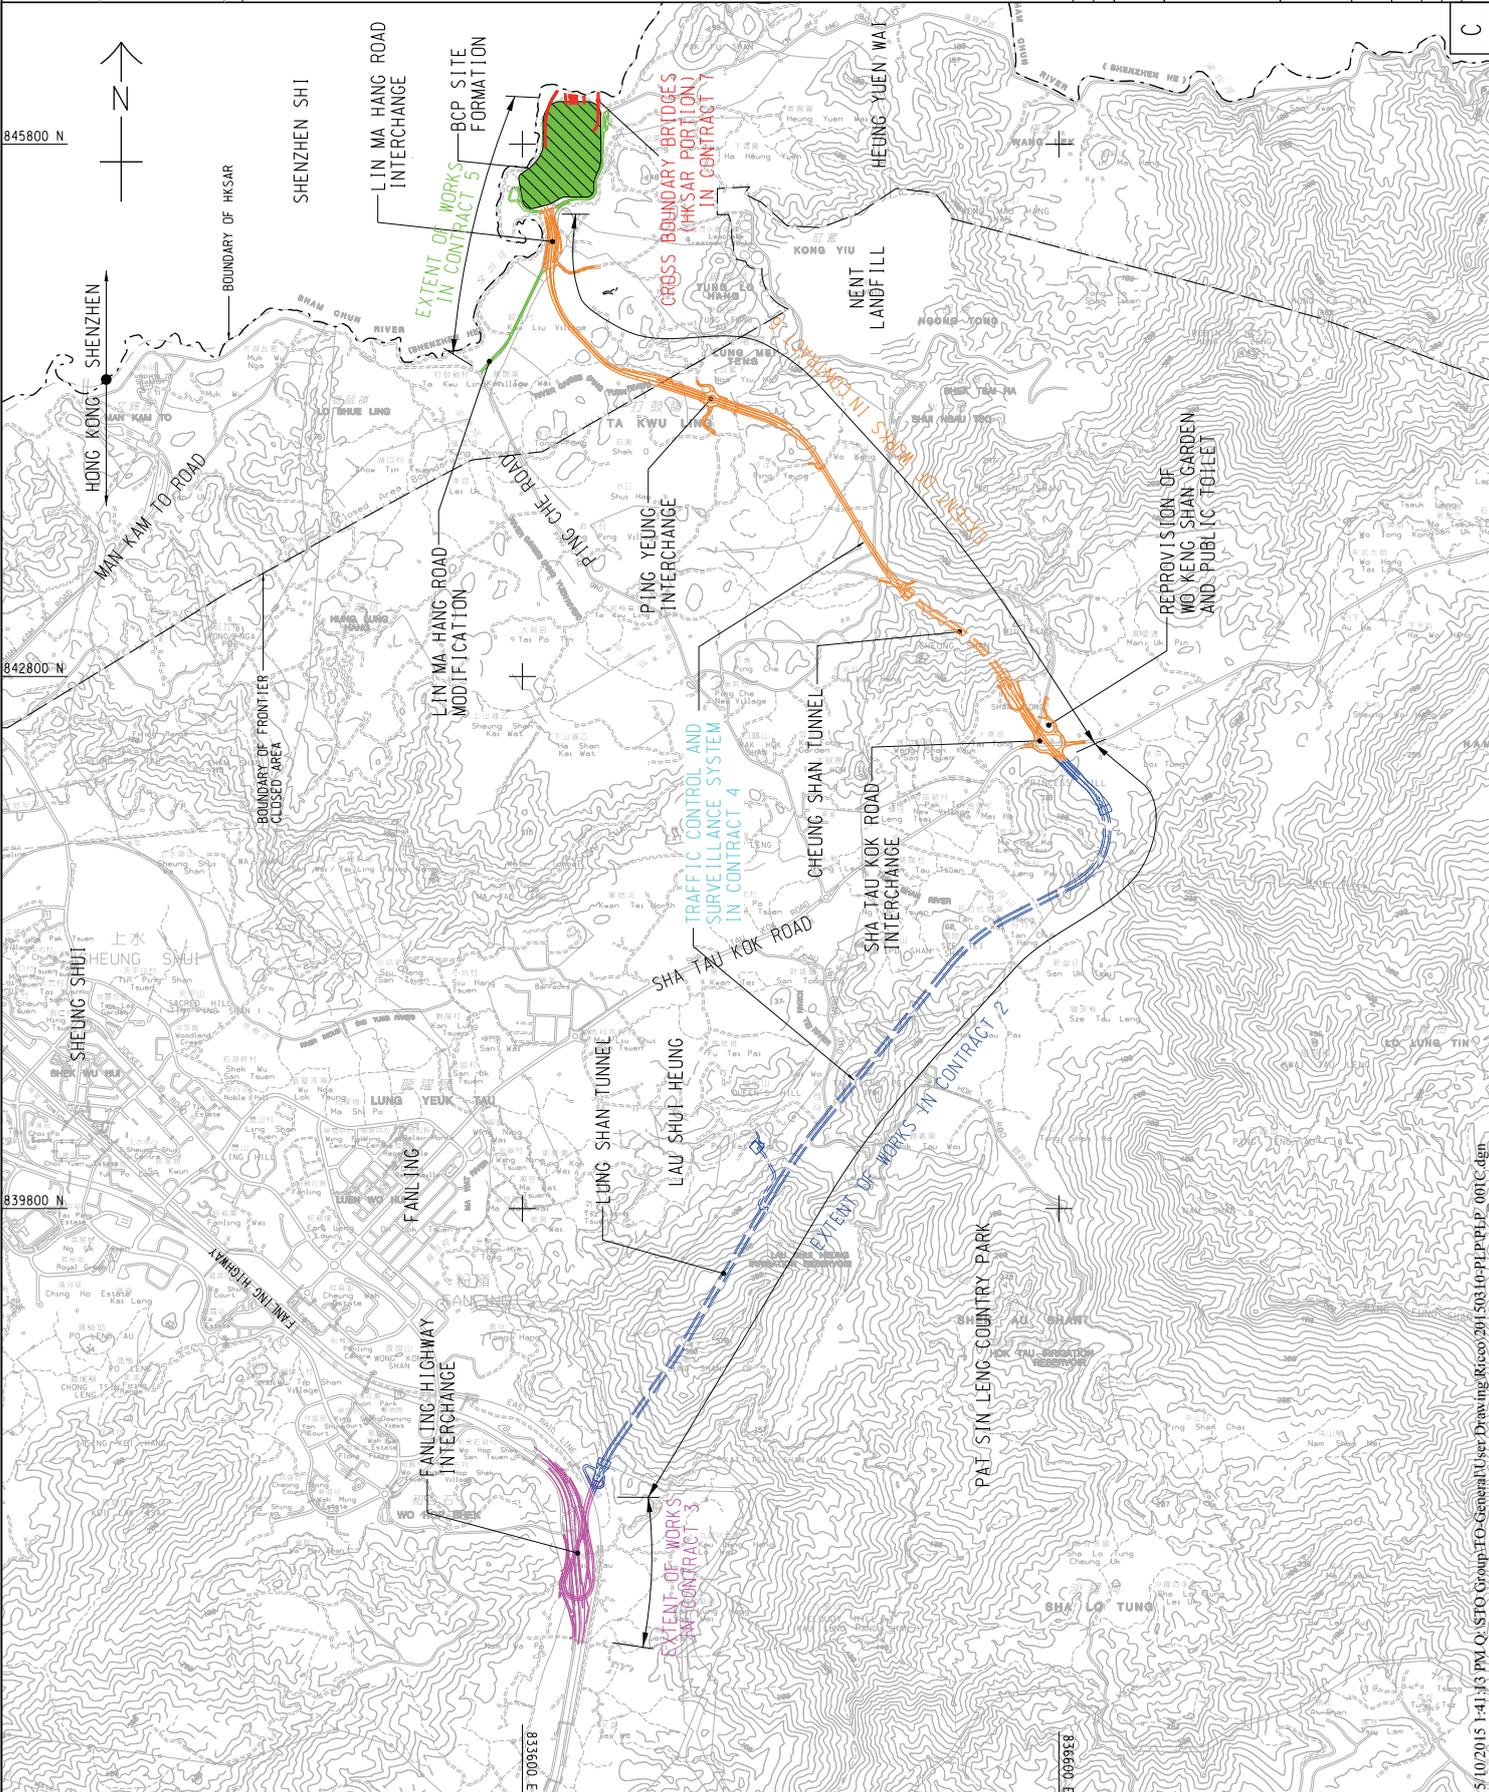

Appendix B

Organization Chart

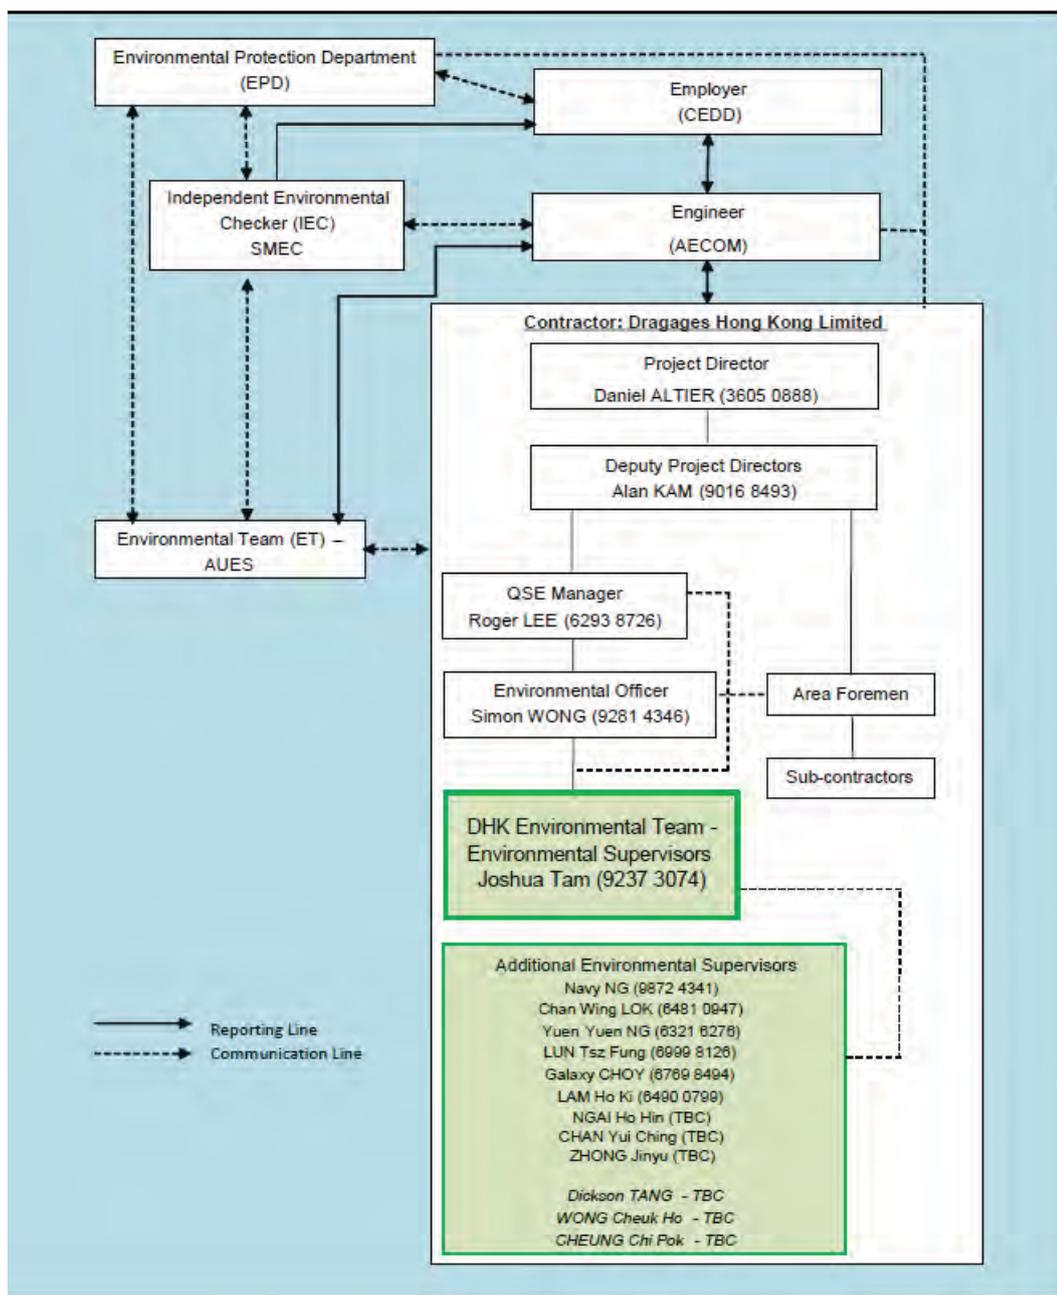

Environmental Management Organization for Contract 2 - (CV/2012/08)

Contact Details of Key Personnel for Contract 2 - CV/2012/08

| Organization | Project Role | Name of Key Staff | Tel No | Fax No. |
|---------------------|-----------------------------------|--------------------------|---------------|----------------|
| AECOM | Engineer's Representative | Edwin Ching | 2171 3301 | 2171 3498 |
| SMEC | Independent Environmental Checker | Antony Wong | 3995 8120 | 3995 8101 |
| DHK | Project Director | Daniel Altier | 3605 0888 | 2171 3299 |
| DHK | Deputy Project Manager | Alan Kam | 9016 8493 | 2171 3299 |
| DHK | QSE Manager | Roger Lee | 6293 8726 | 2171 3299 |
| DHK | Environmental Officer | Simon Wong | 2171 3017 | 2171 3299 |
| DHK | Environmental Supervisor | Joshua Tam | 9237 3074 | 2171 3299 |
| AUES | Environmental Team Leader | T. W. Tam | 2959 6059 | 2959 6079 |
| AUES | Environmental Consultant | Nicola Hon | 2959 6059 | 2959 6079 |
| AUES | Environmental Consultant | Ben Tam | 2959 6059 | 2959 6079 |

Legend:


CEDD (Employer) – Civil Engineering and Development Department

AECOM (Engineer) – AECOM Asia Co. Ltd.

DHK(Main Contractor) –Dragages Hong Kong Ltd.

SMEC (IEC) – SMEC Asia Limited

AUES (ET) – Action-United Environmental Services & Consulting

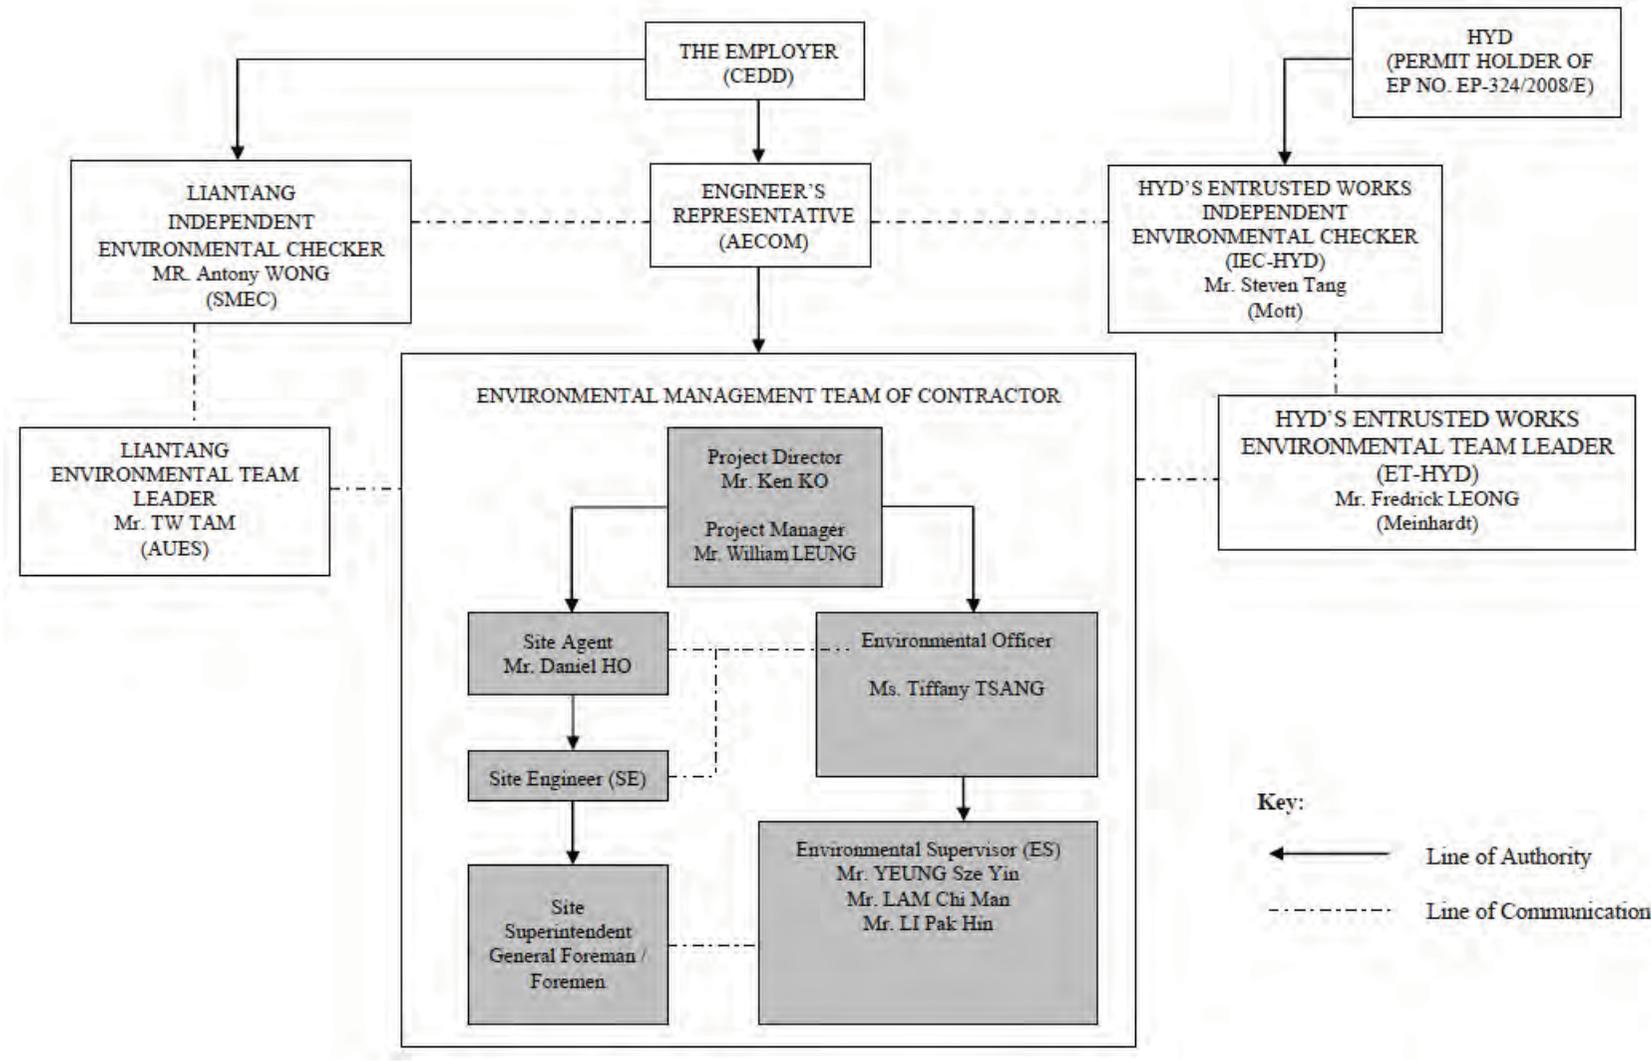

Environmental Management Organization for Contract 3 - CV/2012/09

Contact Details of Key Personnel for Contract 3 - CV/2012/09

| Organization | Project Role | Name of Key Staff | Tel No | Fax No. |
|---------------------|-----------------------------------|--------------------------|---------------|----------------|
| AECOM | Engineer's Representative | Alan Lee | 2171 3303 | 2171 3498 |
| SMEC | Independent Environmental Checker | Antony Wong | 3995 8120 | 3995 8101 |
| Chun Wo | Project Director | Ken Ko | 3758 8735 | 2638 7077 |
| Chun Wo | Project Manager | William Leung | 2638 6136 | 2638 7077 |
| Chun Wo | Site Agent | Daniel Ho | 2638 6144 | 2638 7077 |
| Chun Wo | Environmental Officer | Tiffany Tsang | 2638 6151 | 2638 7077 |
| Chun Wo | Environmental supervisor | Li Pak Hin | 2638 6125 | 2638 7077 |
| AUES | Environmental Team Leader | T. W. Tam | 2959 6059 | 2959 6079 |
| AUES | Environmental Consultant | Nicola Hon | 2959 6059 | 2959 6079 |
| AUES | Environmental Consultant | Ben Tam | 2959 6059 | 2959 6079 |

Legend:


CEDD (Employer) – Civil Engineering and Development Department

AECOM (Engineer) – AECOM Asia Co. Ltd.

Chun Wo (Main Contractor) – Chun Wo Construction Ltd.

SMEC (IEC) – SMEC Asia Limited

AUES (ET) – Action-United Environmental Services & Consulting

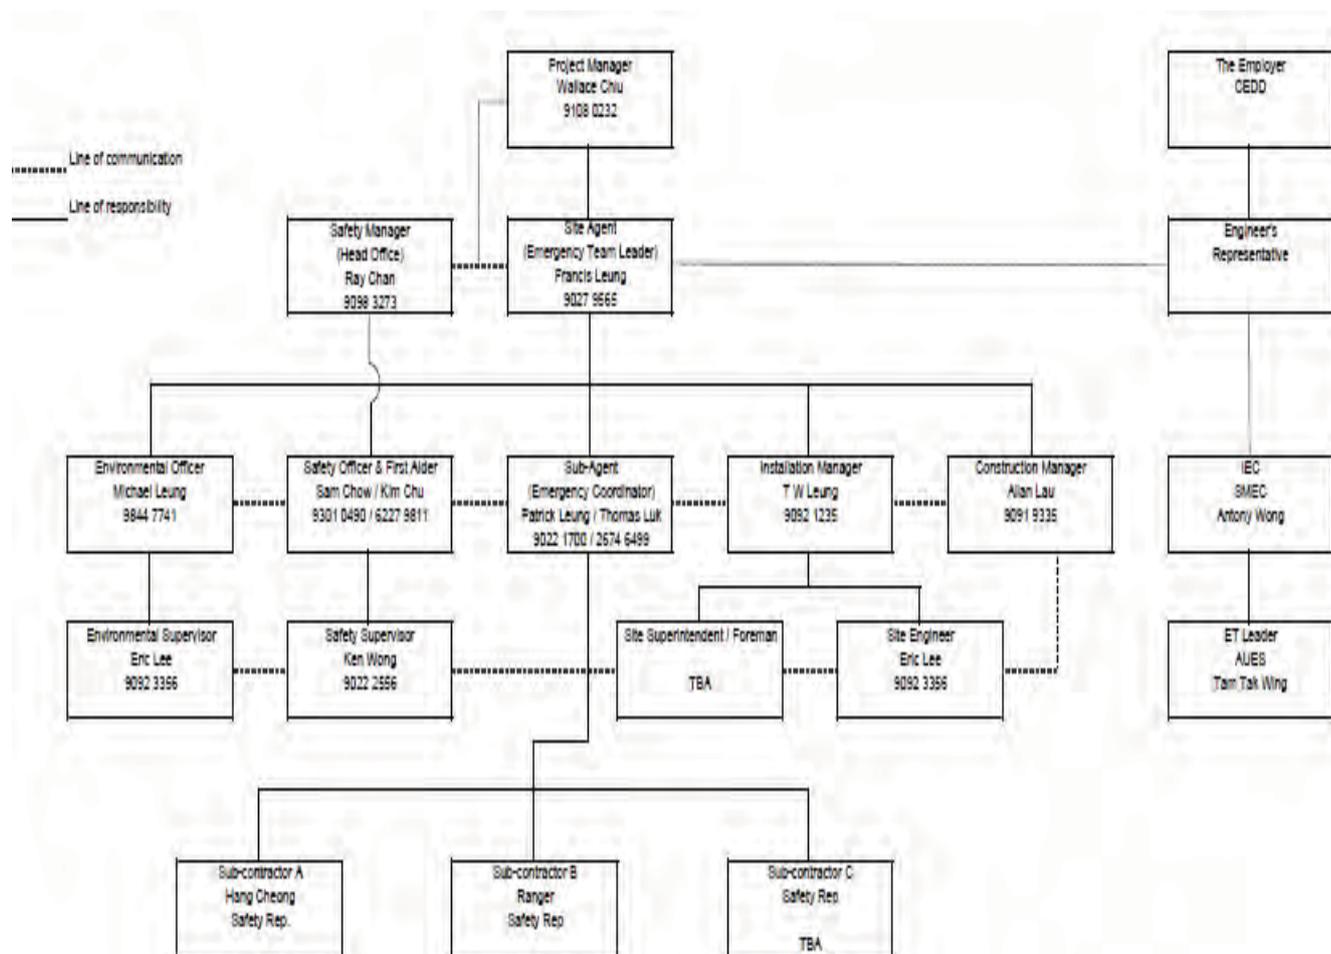

Environmental Management Organization for Contract 4 - NE/2014/02

Contact Details of Key Personnel for Contract 4 - NE/2014/02

| Organization | Project Role | Name of Key Staff | Tel No | Fax No. |
|---------------------|-----------------------------------|--------------------------|---------------|----------------|
| AECOM | Engineer's Representative | Leo Lai | 2171 3310 | 2171 3498 |
| SMEC | Independent Environmental Checker | Antony Wong | 3995 8120 | 3995 8101 |
| Siemens | Project Manager | Wallace Chiu | 9108 0232 | -- |
| Siemens | Site Agent | Francis Leung | 9027 9565 | -- |
| Siemens | Environmental Officer | Michael Leung | 9844 7741 | -- |
| Siemens | Environmental Supervisors | Eric Lee | 9092 3356 | -- |
| AUES | Environmental Team Leader | T. W. Tam | 2959 6059 | 2959 6079 |
| AUES | Environmental Consultant | Nicola Hon | 2959 6059 | 2959 6079 |
| AUES | Environmental Consultant | Ben Tam | 2959 6059 | 2959 6079 |

Legend:


CEDD (Employer) – Civil Engineering and Development Department

AECOM (Engineer) – AECOM Asia Co. Ltd.

Siemens (Main Contractor) – Siemens Ltd.

SMEC (IEC) – SMEC Asia Limited

AUES (ET) – Action-United Environmental Services & Consulting

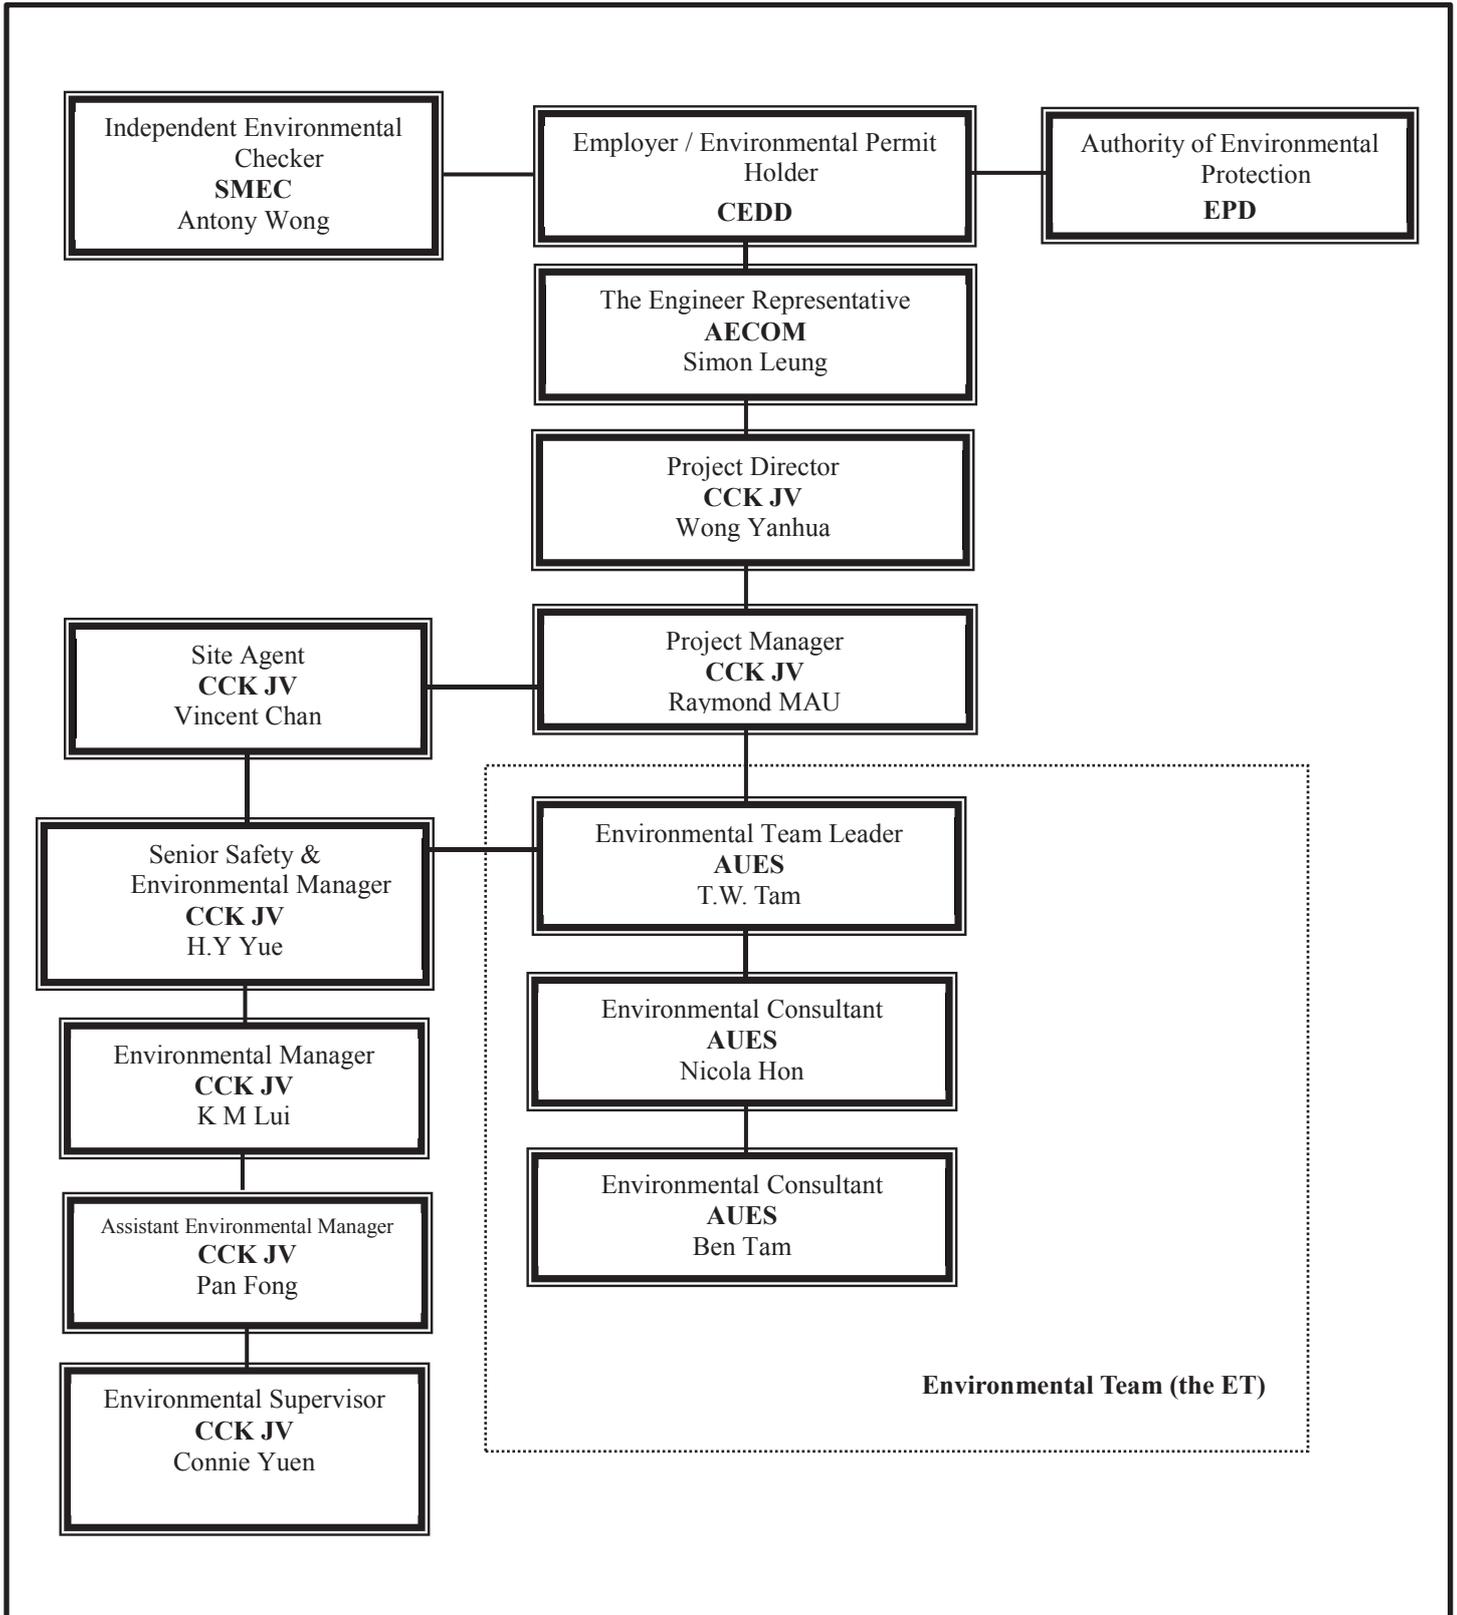

Environmental Management Organization – CV/2013/08

Contact Details of Key Personnel for Contract 6 - CV/2013/08

| Organization | Project Role | Name of Key Staff | Tel No. | Fax No. |
|---------------------|---------------------------------------|--------------------------|----------------|----------------|
| AECOM | Engineer's Representative | Simon Leung | 2251 0688 | 2251 0698 |
| SMEC | Independent Environmental Checker | Antony Wong | 3995 8120 | 3995 8101 |
| CCK JV | Project Director | Wang Yanhua | 6190 4212 | -- |
| CCK JV | Project Manager | Raymond Mau Sai-Wai | 9011 5340 | -- |
| CCK JV | Site Agent | Vincent Chan | 9655 9404 | -- |
| CCK JV | Senior Safety & Environmental Manager | H.Y. Yue | 9185 8186 | -- |
| CCK JV | Environmental Manager | K M Lui | 51138223 | -- |
| CCK JV | Assistant Environmental Manager | Pan Fong | 9436 9432 | -- |
| CCK JV | Environmental Supervisor | Connie Yuen | 6316 6931 | -- |
| AUES | Environmental Team Leader | TW Tam | 2959 6059 | 2959 6079 |
| AUES | Environmental Consultant | Ben Tam | 2959 6059 | 2959 6079 |
| AUES | Environmental Consultant | Nicola Hon | 2959 6059 | 2959 6079 |

Legend:


CEDD (Employer) – Civil Engineering and Development Department

AECOM (Engineer) – AECOM Asia Co. Ltd.

CCK JV (Main Contractor) – CRBE-CEC-Kaden Joint Venture

SMEC (IEC) – SMEC Asia Limited

AUES (ET) – Action-United Environmental Services & Consulting

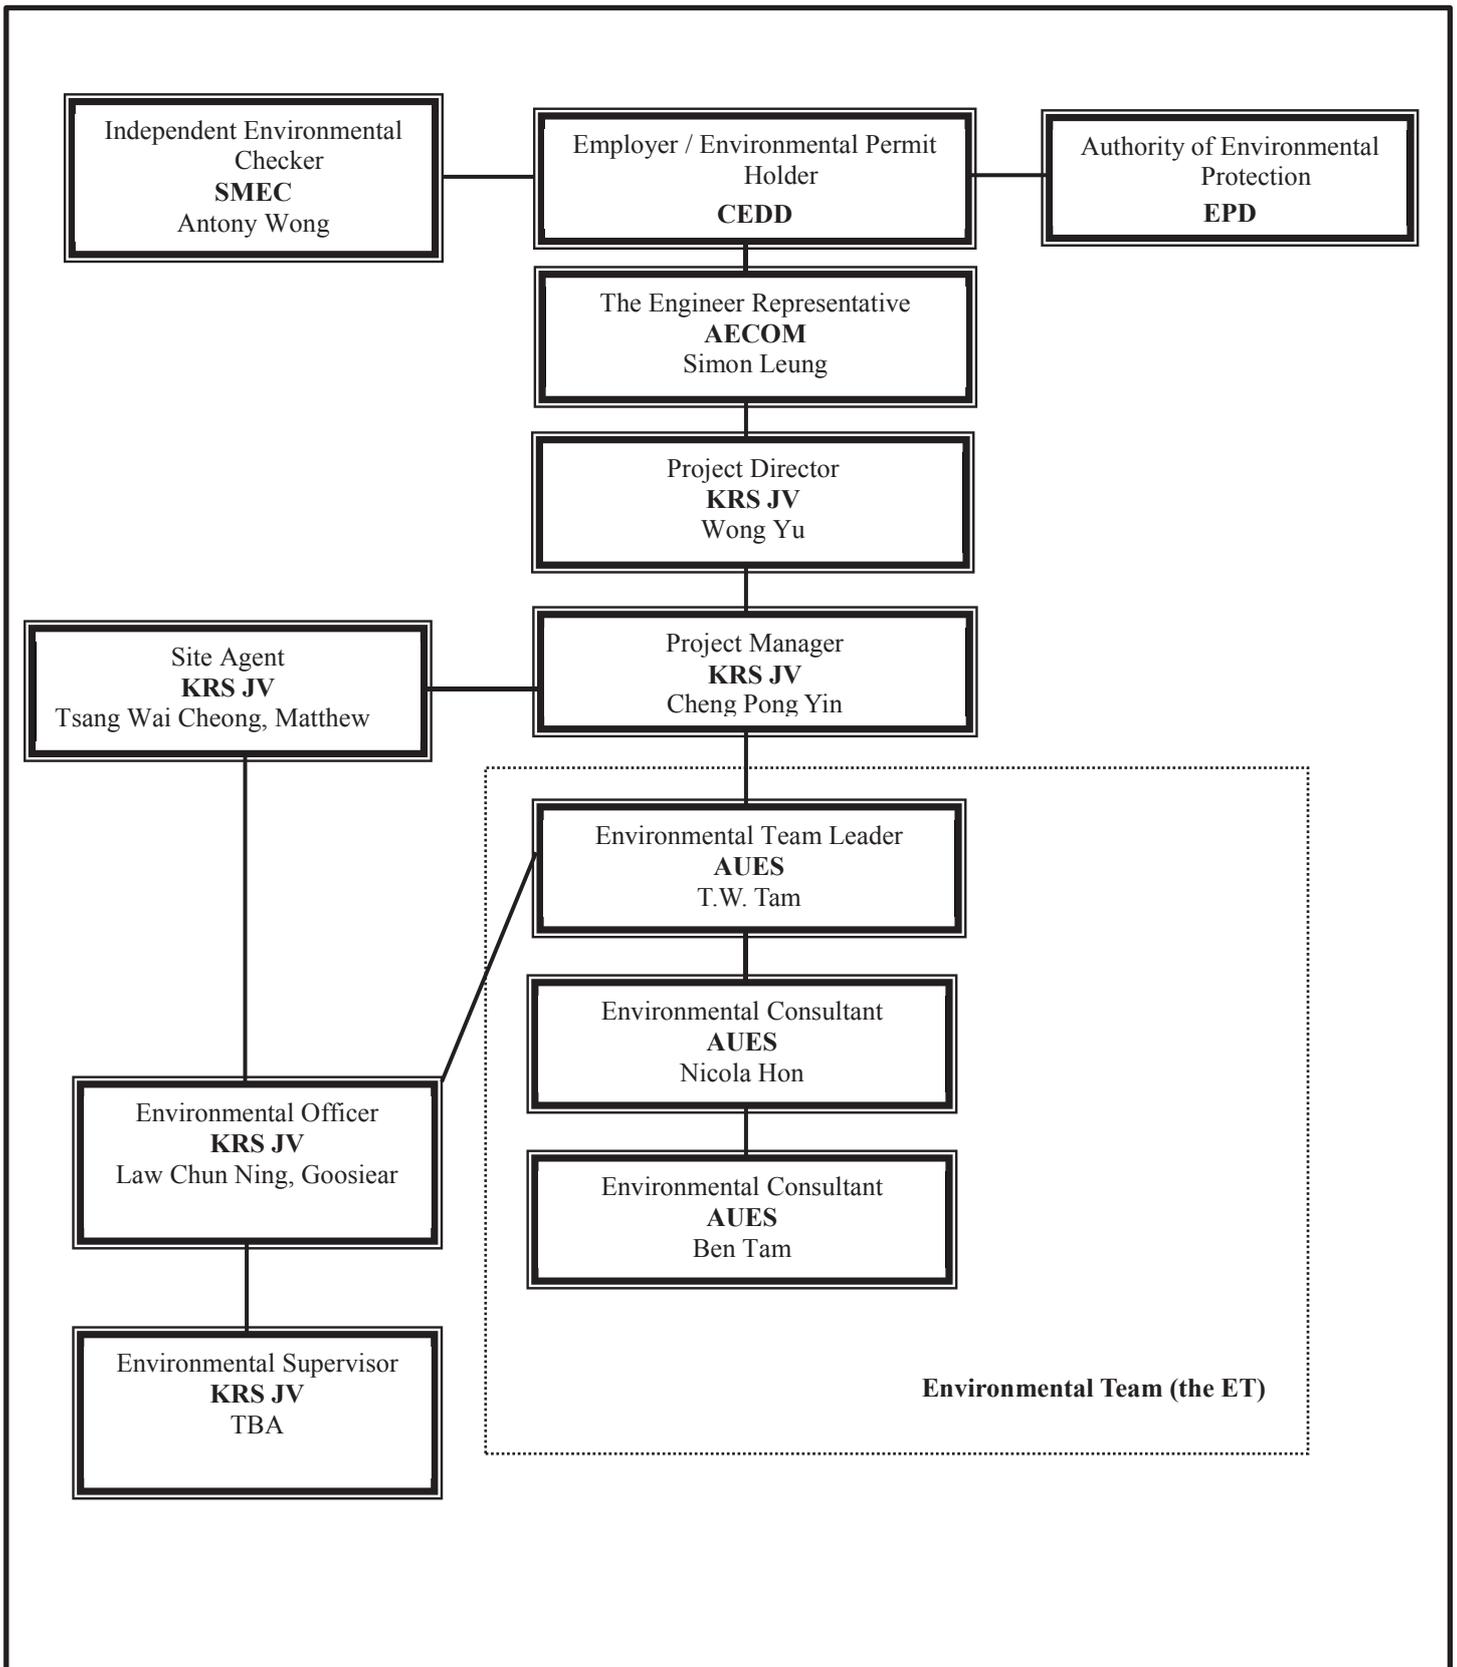

Environmental Management Organization –NE/2014/03

Contact Details of Key Personnel for Contract 7 – NE/2014/03

| Organization | Project Role | Name of Key Staff | Tel No. | Fax No. |
|---------------------|-----------------------------------|------------------------------|----------------|----------------|
| AECOM | Engineer's Representative | Kelvin lee | 2251 0609 | 2251 0698 |
| SMEC | Independent Environmental Checker | Antony Wong | 3995 8120 | 3995 8101 |
| KRSJV | Project Director | Wong Yu | 2682 6691 | 2682 2783 |
| KRSJV | Project Manager | Cheng Pong Yin | 9023 4821 | 2682 2783 |
| KRSJV | Site Agent | Tsang Wai Cheong, Matthew | 9705 7536 | 2682 2783 |
| KRSJV | Environmental Officer | Law Chun Ning, Goosiear | 9625 2381 | 2682 2783 |
| KRSJV | Environmental Supervisor | TBA | 6592 3084 | 2682 2783 |
| AUES | Environmental Team Leader | TW Tam | 2959 6059 | 2959 6079 |
| AUES | Environmental Consultant | Ben Tam | 2959 6059 | 2959 6079 |
| AUES | Environmental Consultant | Nicola Hon | 2959 6059 | 2959 6079 |

Legend:


CEDD (Employer) – Civil Engineering and Development Department

AECOM (Engineer) – AECOM Asia Co. Ltd.

KRS JV (Main Contractor) –Kwan On-Richwell-SCG Joint Venture

SMEC (IEC) – SMEC Asia Limited

AUES (ET) – Action-United Environmental Services & Consulting

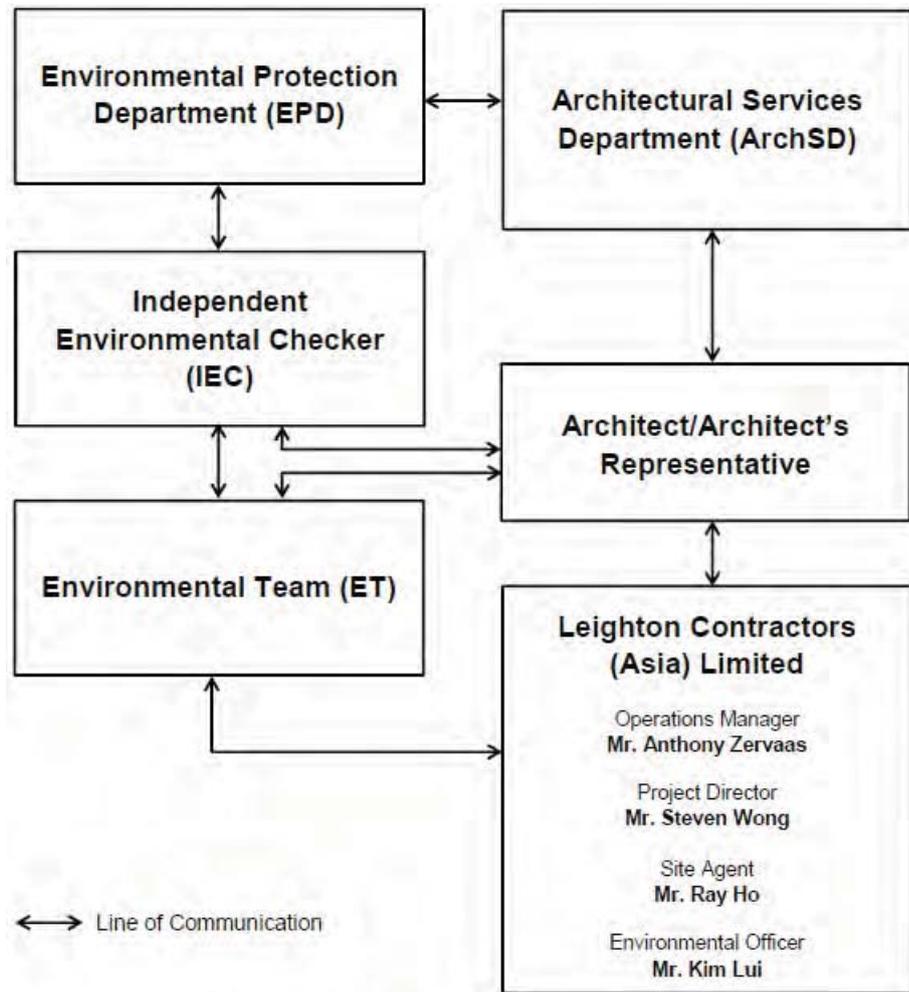

Environmental Management Organigram

Environmental Management Organization for Contract SS C505

Contact Details of Key Personnel for Contract SS C505

| Organization | Project Role | Name of Key Staff | Tel No. | Fax No. |
|----------------------|---|--------------------------|----------------|----------------|
| ArchSD | Works agent for the Development Bureau (DEVB) | Mr. William Cheng | 2867 3904 | 2804 6805 |
| Ronald Lu & Partners | Architect/ Architect's Representative | Mr. Justin Cheung | 3189 9272 | 2834 5442 |
| SMEC | Independent Environmental Checker | Mr. Antony Wong | 3995 8120 | 3995 8101 |
| Leighton | Operation Manager | Mr. Antony Zervaas | 2823 1433 | 2529 8784 |
| Leighton | Project Director | Mr. Steven Wong | 2858 1519 | 2858 1899 |
| Leighton | Site Agent | Mr. Ray Ho | 2858 1519 | 2858 1899 |
| Leighton | Environmental Officer | Mr. Kim Lui | 3973 1003 | - |
| Leighton | Assistant Environmental Officer | Ms. Penny Yiu | 3973 0818 | - |
| AUES | Environmental Team Leader | Mr. T. W. Tam | 2959 6059 | 2959 6079 |
| AUES | Environmental Consultant | Ms. Nicola Hon | 2959 6059 | 2959 6079 |
| AUES | Environmental Consultant | Mr. Ben Tam | 2959 6059 | 2959 6079 |

Legend:

ArchSD (Project Proponent) – Architectural Services Department

Ronald Lu & Partners (Architect/ Architect's Representative) – Ronald Lu & Partners (Hong Kong) Ltd

Leighton (Main Contractor) – Leighton Contractors (Asia) Limited

SMEC (IEC) – SMEC Asia Limited

AUES (ET) – Action-United Environmental Services & Consulting

Appendix C

3-month rolling construction program

Contract 2

Tentative Three Months (March, April and May 2018) Construction Rolling Program

| Item | Construction Activities |
|------|--|
| 1 | Admin Bldg - Construction of permanent access, permanent drainage, fence wall and underground utilities |
| 2 | Admin Bldg - Building internal structure, fit out, E&M installation and soft landscaping |
| 3 | Mid Vent Portal - Construction of C&C structure and backfilling activities |
| 4 | Mid Vent Portal - Construction of adit enlargement internal structure |
| 5 | Mid Vent Portal - Stud tunnel internal structure and E&M installation |
| 6 | Mid-Vent Portal - Ventilation building superstructure, fence wall, internal fit out and E&M installation |
| 7 | Mid Vent Portal - Structure connecting adit tunnel and ventilation building |
| 8 | Mid-Vent Portal - Permanent drainage & underground utilities |
| 9 | North Portal - Construction of retaining wall, permanent drainage, site formation and slip road |
| 10 | North Portal - Tunnel waterproofing, lining, backfilling and E&M installation |
| 11 | North Portal - Construction of tunnel cross passage and internal structure |
| 12 | North Portal - TBM North drive breakthrough |
| 13 | North Portal - North ventilation building superstructure, internal structure and backfilling |
| 14 | North Portal - Drainage cleansing and construction of temporary utility bridge across the mid-platform |
| 15 | South Portal - Waterproofing and lining activities inside the tunnel. |
| 16 | South Portal - Construction of tunnel cross passage, tunnel backfilling and E&M installation |
| 17 | South Portal - South ventilation building internal fit out and E&M installation |
| 18 | South Portal - Construction of retaining walls and backfilling activities |
| | |
| | |
| | |

Contract 3

Contract 4

Liantang / Heung Yuen Wai Boundary Control Point and Associated Works
CEDD Contract No: NE/2014/02
Main Contractor: Siemens Ltd.



Tentative Three Months (March, April and May 2018) Construction Rolling Program

| Item | Construction Activites |
|------|--|
| 1 | System design and testing |
| 2 | E&M installation at admin building |
| 3 | E&M installation at Ventilation Building |
| 4 | E&A installation at OHVD in tunnel |
| 5 | High mast erection |
| | |
| | |
| | |
| | |
| | |
| | |
| | |

Contract 6

Contract 7


Contract SS C505

Tentative Three Months (March, April and May 2018) Construction Rolling Program

| Item | Construction Activities |
|------|---|
| 1 | Passenger Terminal Building - Structure Works, Backfilling & Drainage, Under Ground Utilities, Fence Wall and Slab Construction |
| 2 | Passenger Terminal Building - ABWF Works & Integrated MEP Installation, Nonstructure Wall Erection and Southern Entrance Construction |
| 3 | Passenger Terminal Building - Major Plant Rooms ABWF Works & MEP Installation, and Lift & Escalator Installation by NSC |
| 4 | PTB Roof & Upper Roof Roofing Works - Outstanding Structure Works and Concrete Repairing |
| 5 | PTB - Coach & Private Car Kiosks (Inbound) - Structures Works |
| 6 | PTB - Private Car Examination Buildings and MXRVSS (Inbound) - Structures and Steel Structures Works, ABWF & MEP Installation |
| 7 | C&ED Detector Dog Base - External Structure Works and Integrated ABWF & MEP Works |
| 8 | HKPF Building and Observation Tower - Structures, External Works, Integrated ABWF & MEP Works |
| 9 | Fire Station and Drill Tower - Structures, External Works, Integrated ABWF & MEP Works |
| 10 | Cargo Examination Building (Inbound) - Structure, Steel Structure Works, External Works and Integrated ABWF & MEP Works |
| 11 | Cargo Examination Building (Outbound) - Steel Structure Works and Integrated ABWF & MEP Works |
| 12 | Fixed X-ray Vehicle Inspection System (FXRVIS) Buildings (Inbound) - Structures, External Works and Integrated ABWF & MEP Works |
| 13 | Fixed X-ray Vehicle Inspection System (FXRVIS) Buildings (Outbound) - Structures, External Works and Integrated ABWF & MEP Works |
| 14 | MXRVSS (Inbound) - Structure Works |
| 15 | MXRVSS (Outbound) - Structure Works |
| 16 | GV Kiosk (Inbound) - Structures Works, Steel Structure Works, Integrated ABWF and MEP Works |
| 17 | GV Kiosk (Outbound) - Substructures and Structures Works, Steel Structure Works, Integrated ABWF & MEP Works |
| 18 | Public Toilets (Inbound) - Structure Works |
| 19 | Public Toilets (Outbound) - Structures Works |
| 20 | Disinsection Facilities (Inbound) - Substructure and Structure Works, Integrated ABWF & MEP Works |
| 21 | Disinsection Facilities (Outbound) - Substructure and Structure Works |
| 22 | Weigh Station - Substructure and Structure Works, Integrated ABWF and MEP Works |
| 23 | EUVSS & Monitoring Room - Substructure and Structure Works, Steel Structure Works |
| 24 | Refuse Collection Point - Structures, Integrated ABWF and MEP Works |
| 25 | Traffic Control Office (Inbound) - Structure Works, Integrated ABWF and MEP Works |
| 26 | Traffic Control Office (Outbound) - Structure Works, Integrated ABWF and MEP Works |
| 27 | Inspection Post - Structure Works |
| 28 | Guard Booth (Inbound/Outbound/Vehicle Detention Area) - Structure Works, Integrated ABWF and MEP Works |
| 29 | Steel Canopies - Structure Works |
| 30 | Fire Hydrant Tank & Pump Room - Integrated ABWF and MEP Works |
| 31 | Irrigation Pump Room - Structures works and Integrated ABWF & MEP Works |
| 32 | Master Water Meter Room 1,2,3 - Structures Works and Integrated ABWF and MEP Works |
| 33 | Elevated Walkway (E1, E2, E3 & E4) - Structures and Structural Steel Works |
| 34 | Vehicular bridges 1-5 - Retaining walls, Road and Finishes Works |
| 35 | External Works - CLP Cable & Power ON Transfer room |
| 36 | External Works - Water Meter Room Connection (Inbound) |
| 37 | External Works - Underground Utilities, Structures and Inspection (Inbound & Outbound Areas) |
| 38 | External Works - Road Works |
| 39 | Bridge C (C7 Portion) - Integrated ABWF & MEP Works |
| 38 | Tower Crane Dismantling Works |
| | |
| | |

Appendix D

Designated Monitoring Locations as Recommended in the Approved EM&A Manual

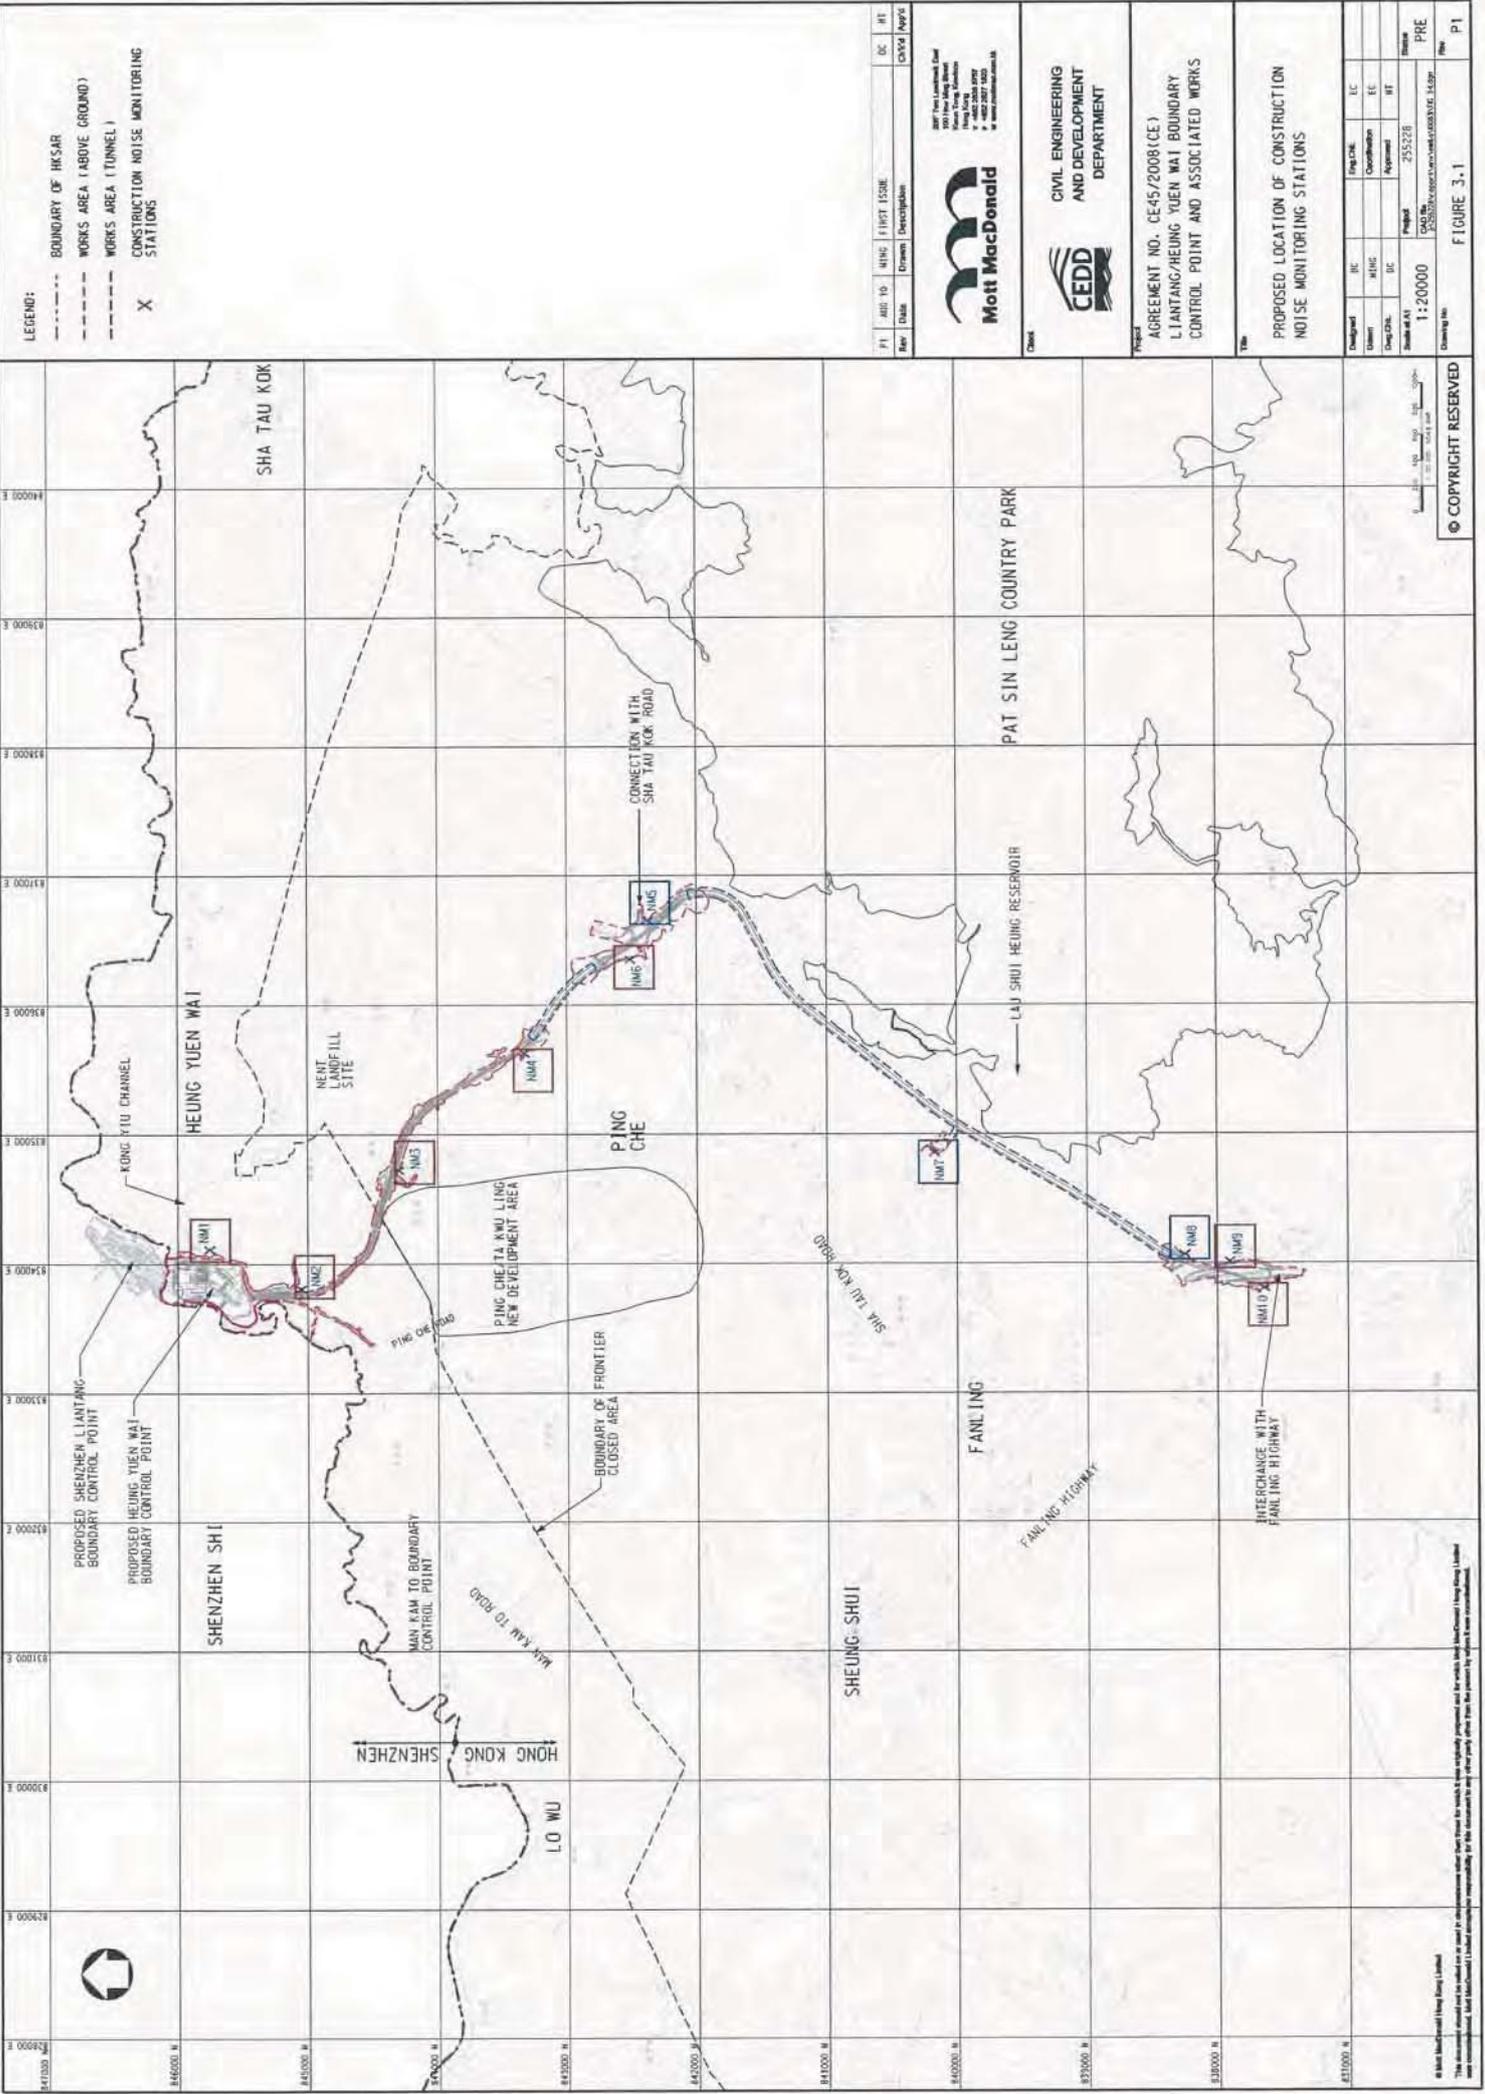

LEGEND:

- BOUNDARY OF HKSAR
- - - WORKS AREA (ABOVE GROUND)
- - - WORKS AREA (TUNNEL)
- X CONSTRUCTION NOISE MONITORING STATIONS

| PI | APP TO | DATE | REV | DESCRIPTION | DC | HT |
|----|--------|------|-----|-------------|----|----|
| | | | | | | |



**CIVIL ENGINEERING
AND DEVELOPMENT
DEPARTMENT**

Project
AGREEMENT NO. CE45/2008(CE)
LIANTANG/HEUNG YUEN MAI BOUNDARY
CONTROL POINT AND ASSOCIATED WORKS

Proposed
LOCATION OF CONSTRUCTION
NOISE MONITORING STATIONS


| Designated | DC | HT | Project | LC |
|------------|----|----|---------|----|
| | | | | |

| Scale at A1 | Scale at A2 | Scale at A3 | Scale at A4 | Scale at A5 |
|-------------|-------------|-------------|-------------|-------------|
| 1:20000 | 1:20000 | 1:20000 | 1:20000 | 1:20000 |

© COPYRIGHT RESERVED

FIGURE 3.1
Rev P1

Mott MacDonald (Hong Kong) Limited
This document is the property of Mott MacDonald (Hong Kong) Limited. It is not to be distributed, copied, or used in any way without the prior written consent of Mott MacDonald (Hong Kong) Limited. The user of this document is responsible for the accuracy and completeness of the information contained herein. Mott MacDonald (Hong Kong) Limited accepts no responsibility for the accuracy or completeness of the information contained herein.

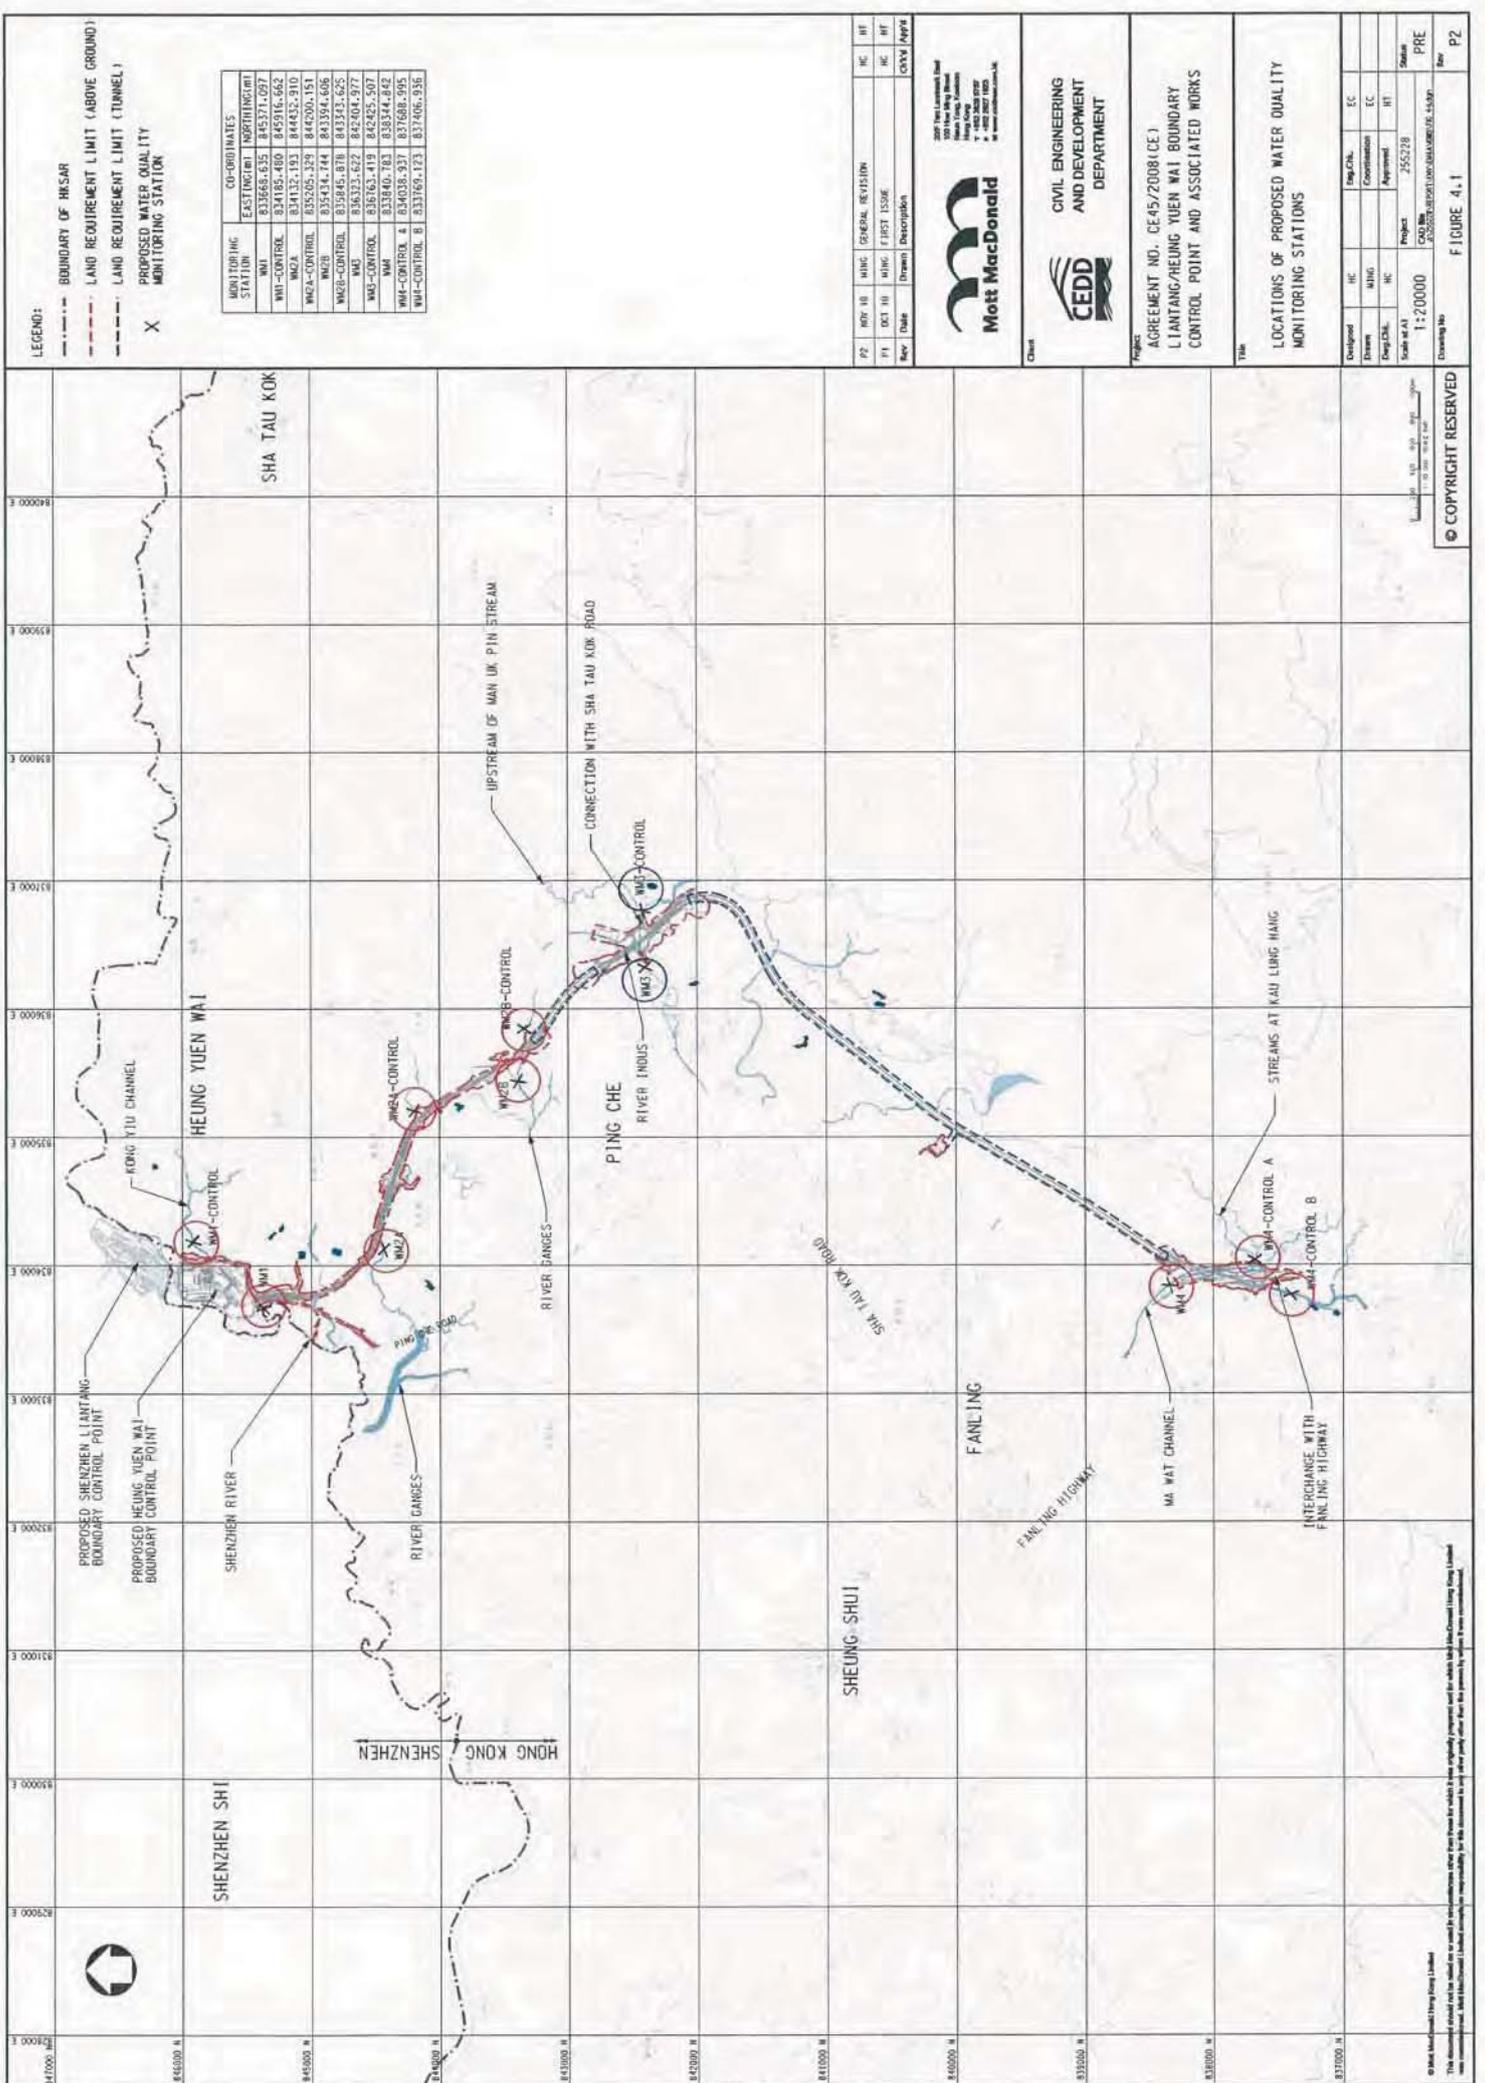

LEGEND:

- BOUNDARY OF HK SAR
- - - LAND REQUIREMENT LIMIT (ABOVE GROUND)
- - - LAND REQUIREMENT LIMIT (TUNNEL)
- X PROPOSED WATER QUALITY MONITORING STATION

| MONITORING STATION | CO-ORDINATES | |
|--------------------|--------------|--------------|
| | EASTING (M) | NORTHING (M) |
| WMA | 837668.635 | 845371.097 |
| WMA-CONTROL | 834185.460 | 845916.662 |
| WMA | 834132.193 | 844832.910 |
| WMA-CONTROL | 835205.329 | 844200.151 |
| WMA | 835434.744 | 843384.606 |
| WMA-CONTROL | 835945.878 | 843343.625 |
| WMA | 836332.622 | 842604.977 |
| WMA-CONTROL | 836163.419 | 842425.507 |
| WMA | 837840.763 | 838344.842 |
| WMA-CONTROL 4 | 834038.937 | 837688.995 |
| WMA-CONTROL 8 | 833769.123 | 837406.936 |

| P2 | REV 18 | MISC | GENERAL REVISION | HC | HT |
|-----|--------|-------|------------------|----|----|
| P1 | DEC 10 | MISC | FIRST ISSUE | HC | HT |
| Rev | Date | Drawn | Description | HC | HT |



CIVIL ENGINEERING AND DEVELOPMENT DEPARTMENT

PROJECT AGREEMENT NO. CE 45/2008(CE)
LIANTANG/YUEN WAI BOUNDARY CONTROL POINT AND ASSOCIATED WORKS

TITLE LOCATIONS OF PROPOSED WATER QUALITY MONITORING STATIONS


| Developed | HC | HT | Eng. Ck. | EC |
|-------------|---------|--------------------------------|------------|-----|
| Drawn | WJG | | Commission | EC |
| Eng. Ck. | HC | | Approved | HT |
| Scale at A3 | Project | 255278 | Station | PRE |
| Drawing No | CAU No | 255278/01/01/04/04/08/08_14/09 | Rev | P2 |

© COPYRIGHT RESERVED

This document is intended for use only for the purposes for which it was originally prepared and for which it has been prepared. It is not to be used for any other purpose without the prior written consent of the Engineer. The Engineer is not responsible for any errors or omissions in this document.

Appendix E

Monitoring Locations for Impact Monitoring

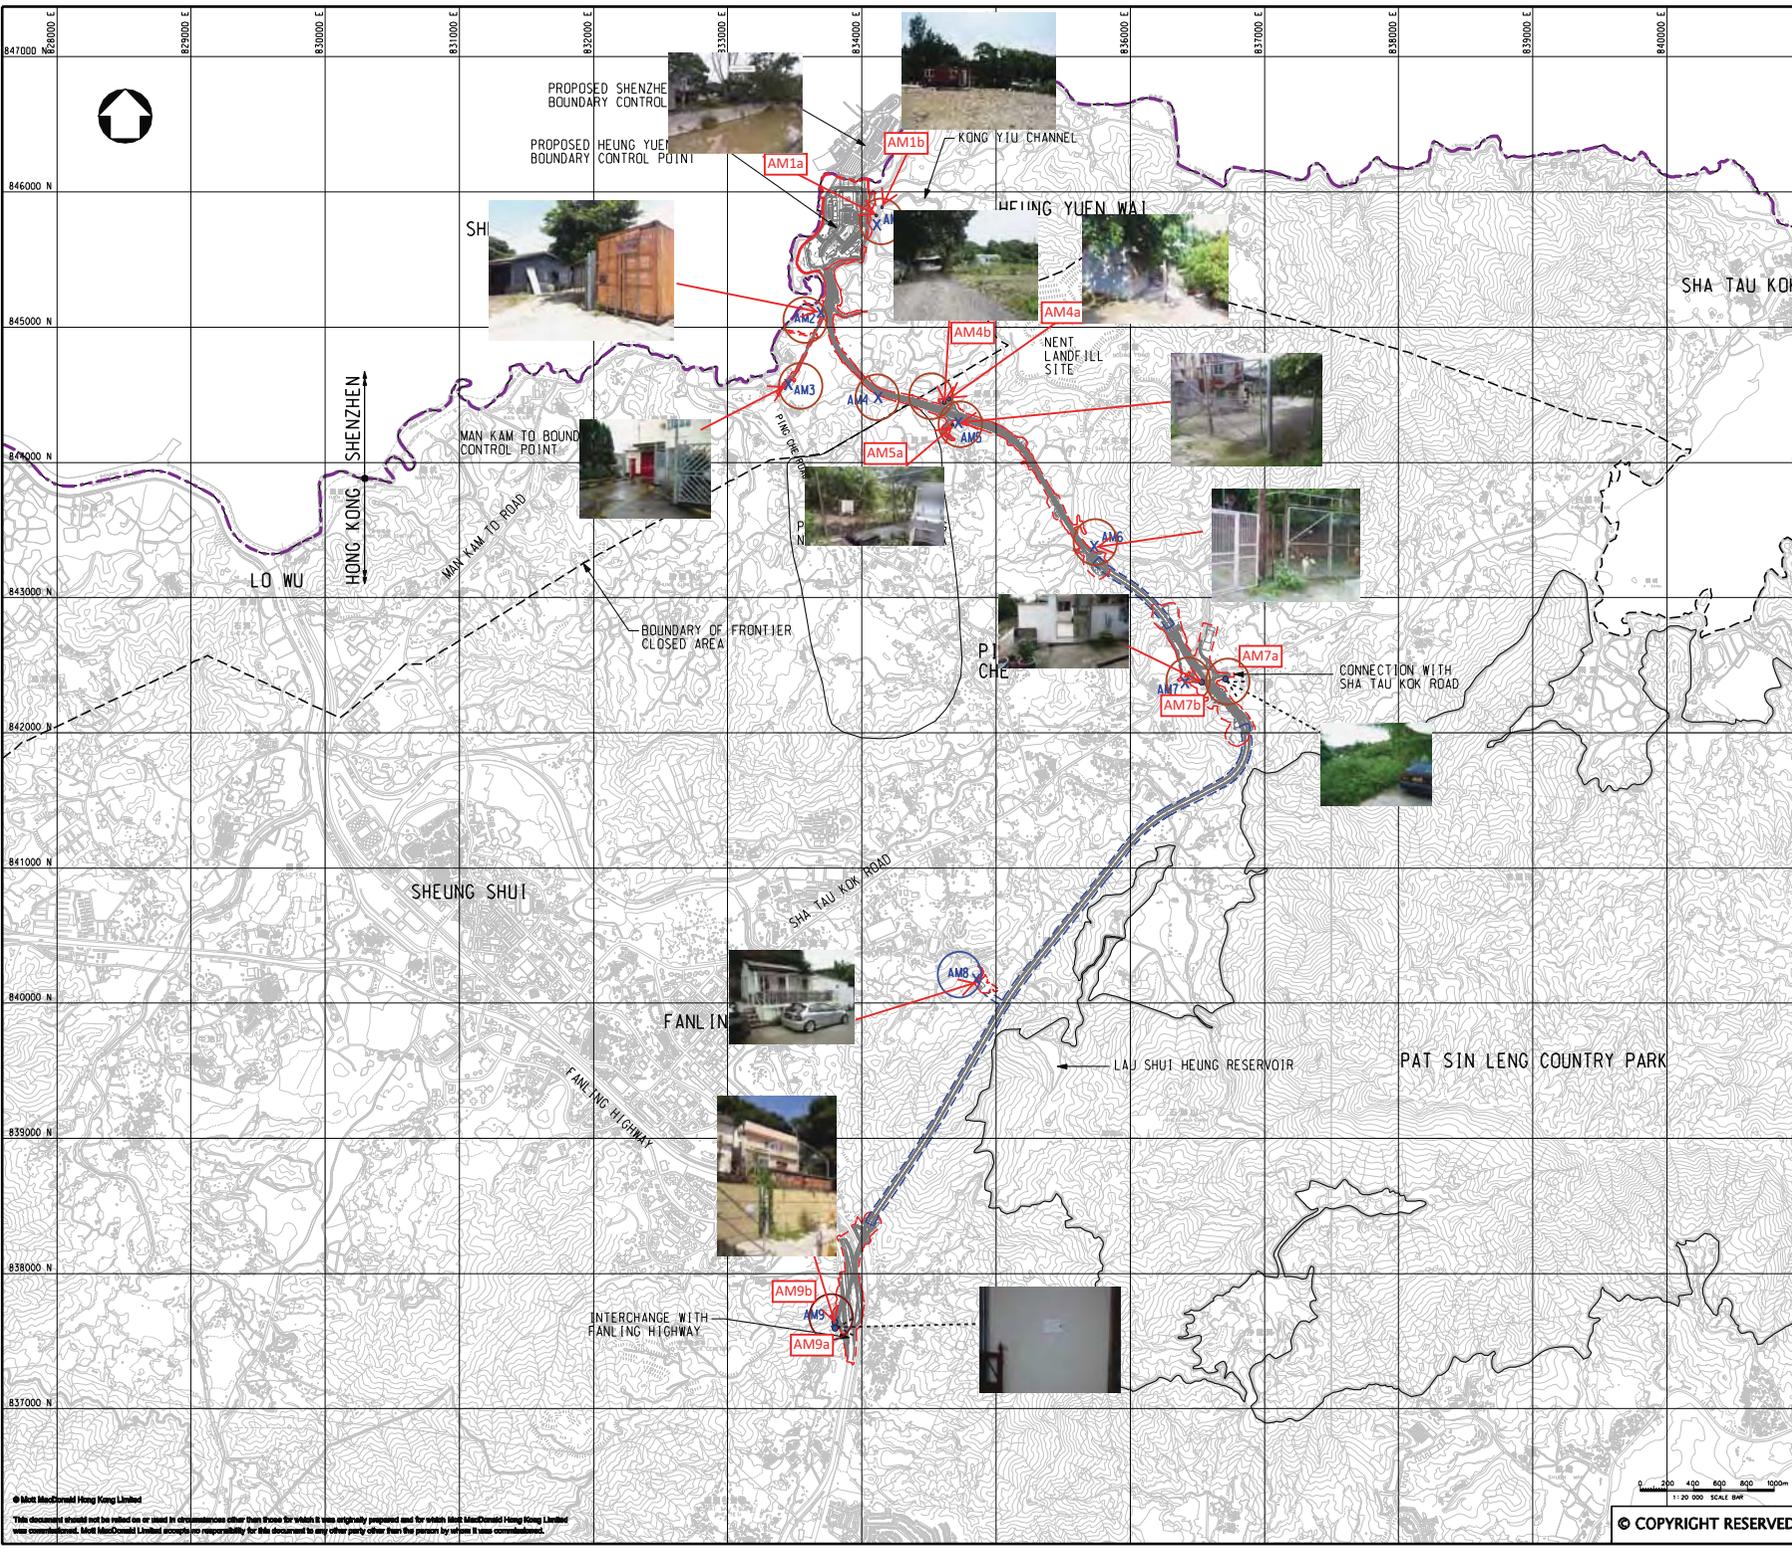

- LEGEND:**
- BOUNDARY OF HKSAR
 - WORKS AREA (ABOVE GROUND)
 - WORKS AREA (TUNNEL)
 - X Air Monitoring Stations in the EM&A Manual
 - Proposed Air Monitoring Stations

| P1 | AUG 10 | MING | FIRST ISSUE | DC | HT |
|-----|--------|-------|-------------|-------|-------|
| Rev | Date | Drawn | Description | Chk'd | App'd |



20/F Two Landmark East
100 Hoo Ming Street
Kowloon, Hong Kong
T +852 2518 5757
F +852 2827 1823
W www.mottmac.com.hk

Client



CIVIL ENGINEERING AND DEVELOPMENT DEPARTMENT

Project
 AGREEMENT NO. CE45/2008(CE)
 LIANTANG/HEUNG YUEN WAI BOUNDARY CONTROL POINT AND ASSOCIATED WORKS


Title
 PROPOSED LOCATION OF CONSTRUCTION AIR QUALITY MONITORING STATIONS

| | | | | |
|-------------|---------|--------------|--|--------|
| Designed | DC | Eng.Chk. | EC | |
| Drawn | MING | Coordination | EC | |
| Draw.Chk. | DC | Approved | HT | |
| Scale at A1 | 1:20000 | Project | 255228 | Status |
| | | CAD file | 255228\report\env\em&a\00831\FE_21.dgn | PRE |
| Drawing No | | | | Rev |
| | | | | P1 |

© Mott MacDonald Hong Kong Limited
 This document should not be relied on or used in circumstances other than those for which it was originally prepared and for which Mott MacDonald Hong Kong Limited was commissioned. Mott MacDonald Limited accepts no responsibility for this document to any other party other than the person by whom it was commissioned.

0 200 400 600 800 1000m
 1:20 000 SCALE BM
 © COPYRIGHT RESERVED

FIGURE 2.1

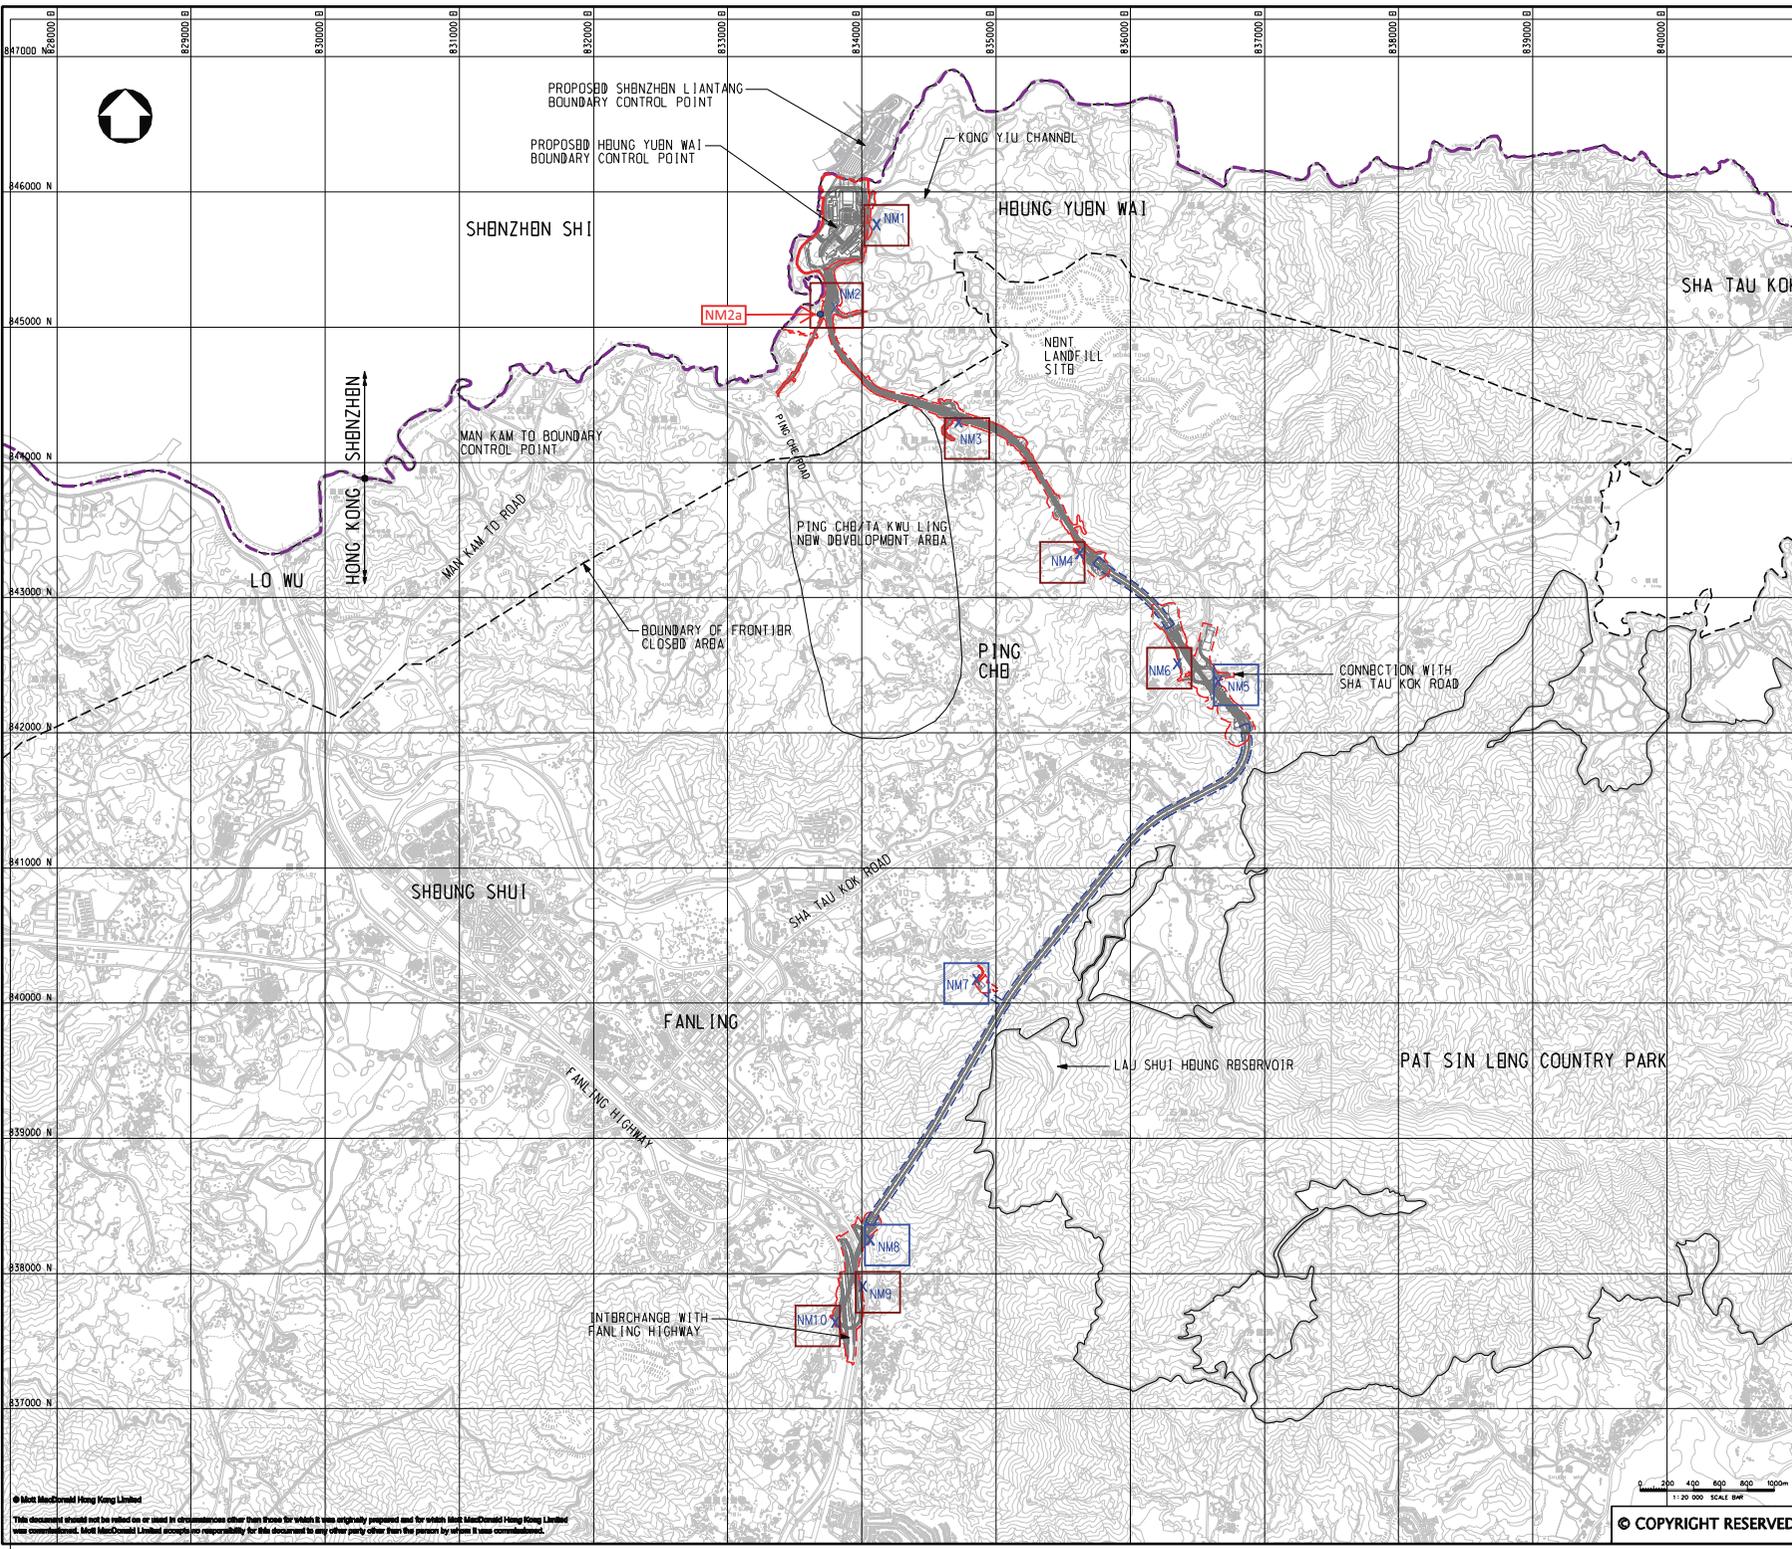

- LEGEND:**
- BOUNDARY OF HKSAR
 - WORKS AREA (ABOVE GROUND)
 - WORKS AREA (TUNNELL)
 - X CONSTRUCTION NOISE MONITORING STATIONS
 - Proposed Noise Monitoring Stations

| P1 | AUG 10 | MING | FIRST ISSUE | DC | HT |
|-----|--------|-------|-------------|-------|-------|
| Rev | Date | Drawn | Description | CHK'd | App'd |



20F Two Landmark East
100 Houshang Street
Kowloon, Kowloon
Hong Kong
T +852 2518 5757
F +852 2827 1823
W www.mottmac.com.hk

Client



CIVIL ENGINEERING AND DEVELOPMENT DEPARTMENT

Project
AGREEMENT NO. CB45/2008(CB)
LIANTANG/HUNG YUEN WAI BOUNDARY CONTROL POINT AND ASSOCIATED WORKS


Title
PROPOSED LOCATION OF CONSTRUCTION NOISE MONITORING STATIONS

| | | | | |
|-------------|---------|--------------|--|--------|
| Designed | DC | Eng.Chk. | BC | |
| Drawn | MING | Coordination | BC | |
| Dep.Chk. | DC | Approved | HT | |
| Scale of A1 | 1:20000 | Project | 255228 | Status |
| | | CAD file | 3\255228\report\env\env\ca\0083\116_31.dgn | PRB |
| Drawing No | | | | Rev |
| | | | | P1 |

© Mott MacDonald Hong Kong Limited
This document should not be relied on or used in circumstances other than those for which it was originally prepared and for which Mott MacDonald Hong Kong Limited was commissioned. Mott MacDonald Limited accepts no responsibility for this document to any other party other than the person by whom it was commissioned.

0 200 400 600 800 1000m
1:20 000 SCALE BM
© COPYRIGHT RESERVED

FIGURE 3.1

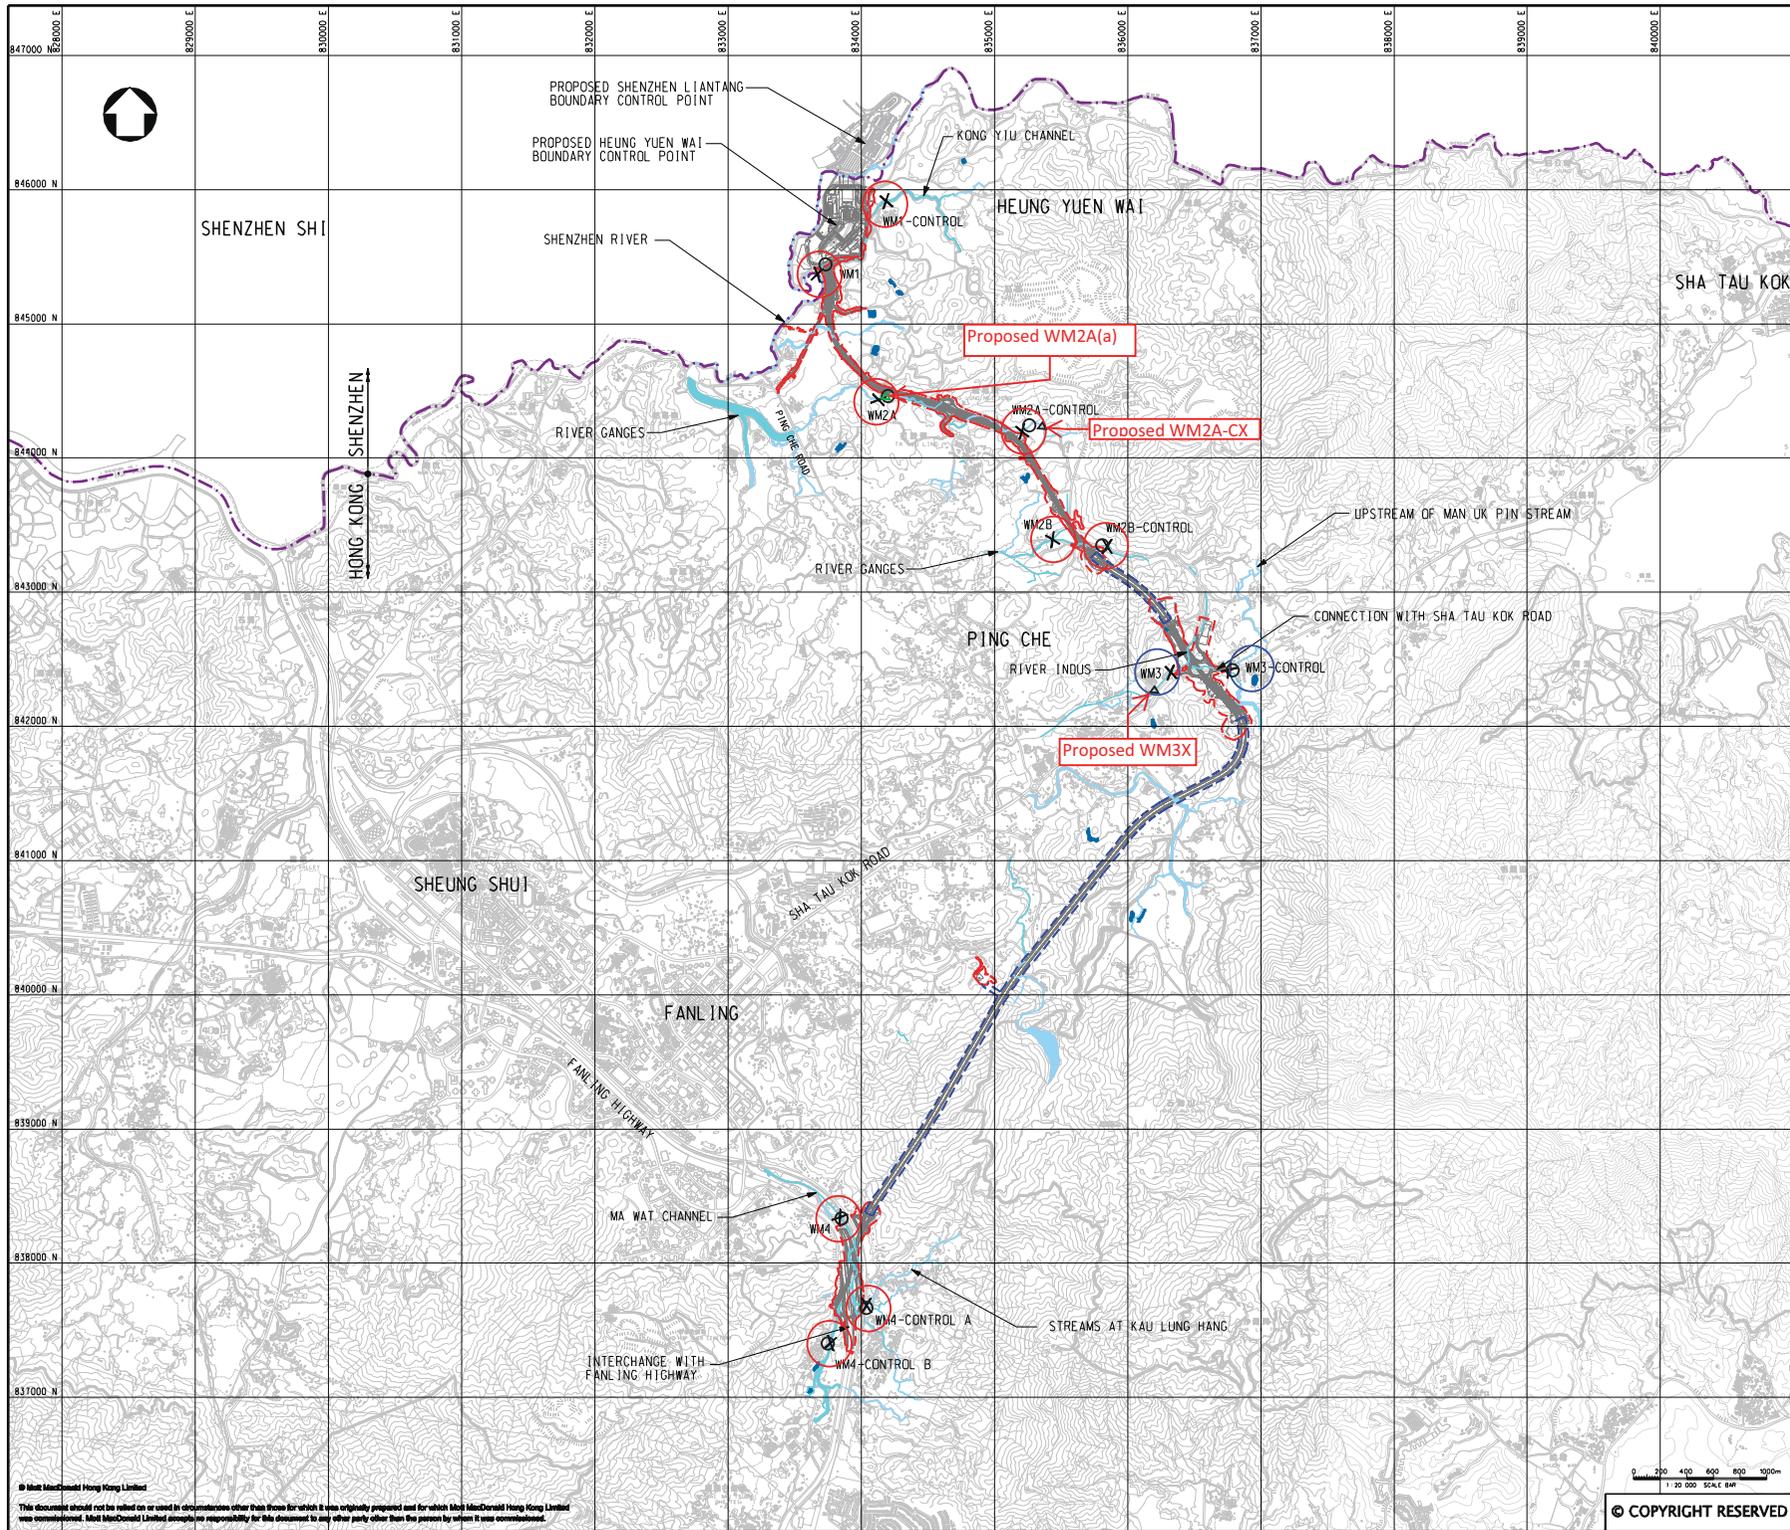

- LEGEND:**
- BOUNDARY OF HKSAR
 - LAND REQUIREMENT LIMIT (ABOVE GROUND)
 - LAND REQUIREMENT LIMIT (TUNNEL)
 - X Water Quality Monitoring Location Recommended in EM&A Manual
 - O Alternative Water Quality Monitoring Location for EM&A Programme
 - △ New Proposed Water Quality Monitoring Location in November 2015
 - △ New Proposed Water Quality Monitoring Location in May 2016

| Station ID | Location recommended in EM&A Manual | | Location found during site visit | |
|---------------|-------------------------------------|------------|----------------------------------|----------|
| | Coordinates | | Coordinates | |
| | Easting | Northing | Easting | Northing |
| WM1 | 833658.835 | 845171.072 | 833670 | 845121 |
| WM1-Control | 834185.480 | 845916.662 | 834185 | 845917 |
| WM2A | 834182.319 | 844432.910 | 834204 | 844743 |
| WM2A-Control | 835105.329 | 844200.151 | 835270 | 844743 |
| WM2B | 835434.744 | 843394.606 | 835435 | 843397 |
| WM2B-Control | 835645.878 | 843343.625 | 835835 | 843351 |
| WM3 | 836123.622 | 842404.377 | 836324 | 842402 |
| WM3-Control | 836763.415 | 842423.507 | 836763 | 842400 |
| WM4 | 835840.789 | 838184.842 | 835850 | 838158 |
| WM4-Control A | 834018.837 | 837668.995 | 834028 | 837605 |
| WM4-Control B | 833769.123 | 837406.936 | 833760 | 837395 |

New Proposed Water Quality Monitoring Location in November 2015

| Location ID | Easting | Northing |
|--------------------|---------|----------|
| WM2A-C (Original) | 0835270 | 0844243 |
| WM2A-Cx (Proposed) | 0835377 | 0844188 |
| WM3 (Original) | 0836324 | 0842402 |
| WM3x (Proposed) | 0836206 | 0842270 |

New Proposed Water Quality Monitoring Location in May 2016

| Location ID | Easting | Northing |
|--------------------|---------|----------|
| WM2A (Original) | 834204 | 844471 |
| WM2A(a) (Proposed) | 834191 | 844474 |

| Rev | Date | Drawn | Description | CHK'd | App'd |
|-----|--------|-------|------------------|-------|-------|
| P2 | NOV 10 | MING | GENERAL REVISION | HC | HT |
| P1 | OCT 10 | MING | FIRST ISSUE | HC | HT |



Project:
AGREEMENT NO. CE45/2008 (CE)
LIANTANG/HEUNG YUEN WAI BOUNDARY CONTROL POINT AND ASSOCIATED WORKS

Title:
LOCATIONS OF PROPOSED WATER QUALITY MONITORING STATIONS

| Designed | HC | Eng.Chk. | EC |
|----------|------|--------------|----|
| Drawn | MING | Coordination | EC |
| Dwg.Chk. | HC | Approved | HT |

Scale at A1: 1:20000 Project: 255228 Status: PRE

© Mott MacDonald Hong Kong Limited
This document should not be relied on or used in circumstances other than those for which it was originally prepared and for which Mott MacDonald Hong Kong Limited was commissioned. Mott MacDonald Limited accepts no responsibility for this document to any other party other than the person to whom it was commissioned.

Appendix F

Calibration Certificate of Monitoring Equipment and HOKLAS-accreditation Certificate of the Testing Laboratory

TSP SAMPLER CALIBRATION CALCULATION SPREADSHEET

| | | |
|---|------------------------|-----------|
| Location : Open area at Tsung Yuen Ha Village | Date of Calibration: | 12/2/2018 |
| Location ID : AM1b | Next Calibration Date: | 12/4/2018 |
| | Technician: | Fai So |

CONDITIONS

| | | | |
|--------------------------|--------|----------------------------|-------|
| Sea Level Pressure (hPa) | 1026.4 | Corrected Pressure (mm Hg) | 769.8 |
| Temperature (°C) | 14.9 | Temperature (K) | 288 |

CALIBRATION ORIFICE

| | | |
|------------------|-------------------|----------|
| Make-> TISCH | Qstd Slope -> | 2.11965 |
| Model-> 5025A | Qstd Intercept -> | -0.02696 |
| Serial # -> 1941 | | |

CALIBRATION

| Plate No. | H2O (L) (in) | H2O (R) (in) | H2O (in) | Qstd (m3/min) | I (chart) | IC corrected | LINEAR REGRESSION | | |
|-----------|--------------|--------------|----------|---------------|-----------|--------------|-------------------|-------------|----------------|
| | | | | | | | Slope = | Intercept = | Corr. coeff. = |
| 18 | 6.3 | 6.3 | 12.6 | 1.727 | 51 | 52.22 | Slope = | 30.7831 | |
| 13 | 4.9 | 4.9 | 9.8 | 1.525 | 44 | 45.05 | Intercept = | -1.3066 | |
| 10 | 3.8 | 3.8 | 7.6 | 1.344 | 40 | 40.96 | Corr. coeff. = | 0.9967 | |
| 7 | 2.6 | 2.6 | 5.2 | 1.114 | 31 | 31.74 | | | |
| 5 | 1.4 | 1.4 | 2.8 | 0.821 | 24 | 24.57 | | | |

Calculations :

$$Qstd = 1/m[\text{Sqrt}(H2O(Pa/Pstd)(Tstd/Ta))-b]$$


$$IC = I[\text{Sqrt}(Pa/Pstd)(Tstd/Ta)]$$

Qstd = standard flow rate
 IC = corrected chart responses
 I = actual chart response
 m = calibrator Qstd slope
 b = calibrator Qstd intercept
 Ta = actual temperature during calibration (deg K)
 Pstd = actual pressure during calibration (mm Hg)

For subsequent calculation of sampler flow:

$$1/m((I)[\text{Sqrt}(298/Tav)(Pav/760)]-b)$$

m = sampler slope
 b = sampler intercept
 I = chart response
 Tav = daily average temperature
 Pav = daily average pressure

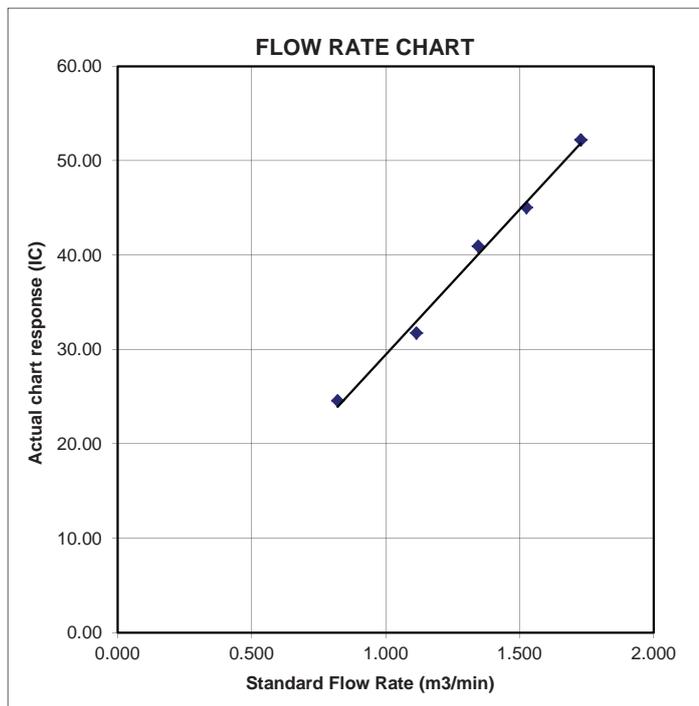

TSP SAMPLER CALIBRATION CALCULATION SPREADSHEET

| | | |
|--|------------------------|-----------|
| Location : Village House near Lin Ma Hang Road | Date of Calibration: | 12/2/2018 |
| Location ID : AM2 | Next Calibration Date: | 12/4/2018 |
| | Technician: | Fai So |

CONDITIONS

| | | | |
|--------------------------|--------|----------------------------|-------|
| Sea Level Pressure (hPa) | 1026.4 | Corrected Pressure (mm Hg) | 769.8 |
| Temperature (°C) | 14.9 | Temperature (K) | 288 |

CALIBRATION ORIFICE

| | | | |
|-------------|-------|-------------------|----------|
| Make-> | TISCH | Qstd Slope -> | 2.11965 |
| Model-> | 5025A | Qstd Intercept -> | -0.02696 |
| Serial # -> | 1941 | | |

CALIBRATION

| Plate No. | H2O (L) (in) | H2O (R) (in) | H2O (in) | Qstd (m3/min) | I (chart) | IC corrected | LINEAR REGRESSION |
|-----------|--------------|--------------|----------|---------------|-----------|--------------|--|
| 18 | 6 | 6 | 12.0 | 1.686 | 54 | 55.29 | Slope = 30.6026 Intercept = 2.3931 Corr. coeff. = 0.9904 |
| 13 | 4.9 | 4.9 | 9.8 | 1.525 | 48 | 49.15 | |
| 10 | 3.7 | 3.7 | 7.4 | 1.327 | 40 | 40.96 | |
| 7 | 2.6 | 2.6 | 5.2 | 1.114 | 35 | 35.84 | |
| 5 | 1.5 | 1.5 | 3.0 | 0.849 | 29 | 29.69 | |

Calculations :

$$Q_{std} = 1/m[\sqrt{H_2O(P_a/P_{std})(T_{std}/T_a)}] - b]$$

$$IC = I[\sqrt{P_a/P_{std})(T_{std}/T_a)}]$$

Qstd = standard flow rate

IC = corrected chart responses

I = actual chart response

m = calibrator Qstd slope

b = calibrator Qstd intercept

Ta = actual temperature during calibration (deg K)

Pstd = actual pressure during calibration (mm Hg)

For subsequent calculation of sampler flow:

$$1/m((I)[\sqrt{298/T_{av}}(P_{av}/760)] - b)$$


m = sampler slope

b = sampler intercept

I = chart response

Tav = daily average temperature

Pav = daily average pressure

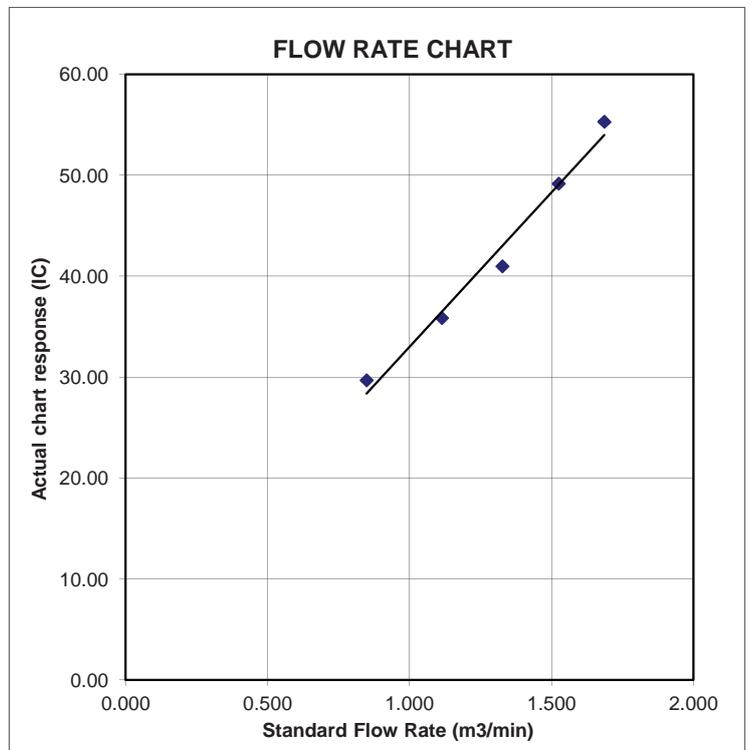

TSP SAMPLER CALIBRATION CALCULATION SPREADSHEET

| | | |
|---|------------------------|-----------|
| Location : Ta Kwu Ling Fire Service Station | Date of Calibration: | 12/2/2018 |
| Location ID : AM3 | Next Calibration Date: | 12/4/2018 |
| | Technician: | Fai So |

CONDITIONS

| | | | |
|--------------------------|--------|----------------------------|-------|
| Sea Level Pressure (hPa) | 1026.4 | Corrected Pressure (mm Hg) | 769.8 |
| Temperature (°C) | 14.9 | Temperature (K) | 288 |

CALIBRATION ORIFICE

| | | | |
|-------------|-------|-------------------|----------|
| Make-> | TISCH | Qstd Slope -> | 2.11965 |
| Model-> | 5025A | Qstd Intercept -> | -0.02696 |
| Serial # -> | 1941 | | |

CALIBRATION

| Plate No. | H2O (L) (in) | H2O (R) (in) | H2O (in) | Qstd (m3/min) | I (chart) | IC corrected | LINEAR REGRESSION |
|-----------|--------------|--------------|----------|---------------|-----------|--------------|--|
| 18 | 6.3 | 6.3 | 12.6 | 1.727 | 54 | 55.29 | Slope = 28.9393 Intercept = 4.9539 Corr. coeff. = 0.9920 |
| 13 | 4.7 | 4.7 | 9.4 | 1.494 | 47 | 48.12 | |
| 10 | 3.9 | 3.9 | 7.8 | 1.362 | 42 | 43.00 | |
| 7 | 2.4 | 2.4 | 4.8 | 1.071 | 37 | 37.89 | |
| 5 | 1.5 | 1.5 | 3.0 | 0.849 | 28 | 28.67 | |

Calculations :

$$Qstd = 1/m[\text{Sqrt}(H2O(Pa/Pstd)(Tstd/Ta))-b]$$

$$IC = I[\text{Sqrt}(Pa/Pstd)(Tstd/Ta)]$$

Qstd = standard flow rate

IC = corrected chart responses

I = actual chart response

m = calibrator Qstd slope

b = calibrator Qstd intercept

Ta = actual temperature during calibration (deg K)

Pstd = actual pressure during calibration (mm Hg)

For subsequent calculation of sampler flow:

$$1/m((I)[\text{Sqrt}(298/Tav)(Pav/760)]-b)$$


m = sampler slope

b = sampler intercept

I = chart response

Tav = daily average temperature

Pav = daily average pressure

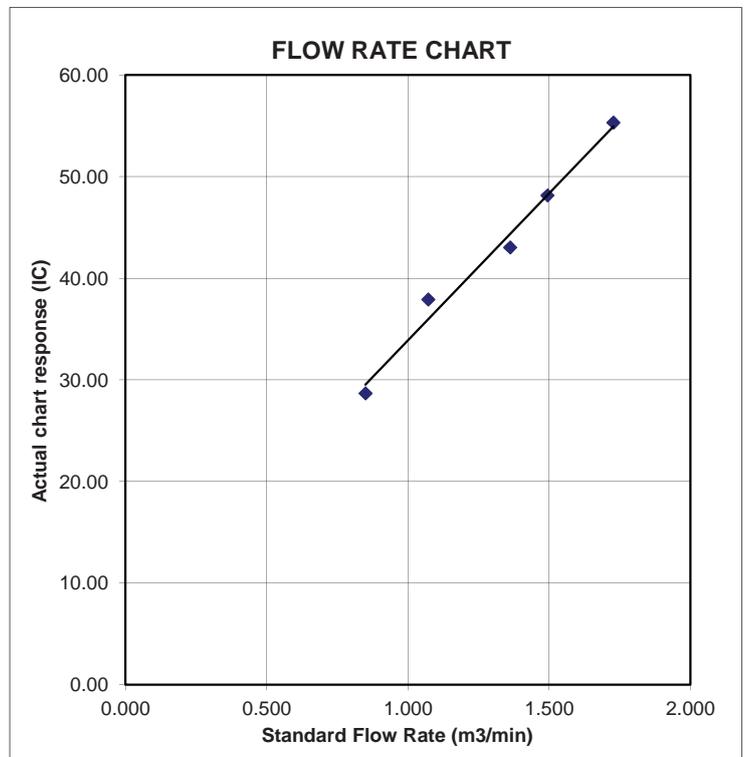

TSP SAMPLER CALIBRATION CALCULATION SPREADSHEET

| | | |
|-------------------------------|------------------------|-----------|
| Location : Nga Yiu Ha Village | Date of Calibration: | 10/2/2018 |
| Location ID : AM4b | Next Calibration Date: | 10/4/2018 |
| | Technician: | Fai So |

CONDITIONS

| | | | |
|--------------------------|--------|----------------------------|--------|
| Sea Level Pressure (hPa) | 1017.4 | Corrected Pressure (mm Hg) | 763.05 |
| Temperature (°C) | 18.0 | Temperature (K) | 291 |

CALIBRATION ORIFICE

| | | | |
|-------------|-------|-------------------|----------|
| Make-> | TISCH | Qstd Slope -> | 2.11965 |
| Model-> | 5025A | Qstd Intercept -> | -0.02696 |
| Serial # -> | 1941 | | |

CALIBRATION

| Plate No. | H2O (L) (in) | H2O (R) (in) | H2O (in) | Qstd (m3/min) | I (chart) | IC corrected | LINEAR REGRESSION |
|-----------|--------------|--------------|----------|---------------|-----------|--------------|--|
| 18 | 6 | 6 | 12.0 | 1.670 | 61 | 61.85 | Slope = 35.3270 Intercept = 3.2919 Corr. coeff. = 0.9930 |
| 13 | 4.7 | 4.7 | 9.4 | 1.479 | 54 | 54.76 | |
| 10 | 3.7 | 3.7 | 7.4 | 1.314 | 50 | 50.70 | |
| 7 | 2.4 | 2.4 | 4.8 | 1.061 | 42 | 42.59 | |
| 5 | 1.5 | 1.5 | 3.0 | 0.841 | 31 | 31.43 | |
| | | | | | | | |

Calculations :

$$Qstd = 1/m[\text{Sqrt}(H20(Pa/Pstd)(Tstd/Ta))-b]$$

$$IC = I[\text{Sqrt}(Pa/Pstd)(Tstd/Ta)]$$

Qstd = standard flow rate

IC = corrected chart responses

I = actual chart response

m = calibrator Qstd slope

b = calibrator Qstd intercept

Ta = actual temperature during calibration (deg K)

Pstd = actual pressure during calibration (mm Hg)

For subsequent calculation of sampler flow:

$$1/m((I)[\text{Sqrt}(298/Tav)(Pav/760)]-b)$$


m = sampler slope

b = sampler intercept

I = chart response

Tav = daily average temperature

Pav = daily average pressure

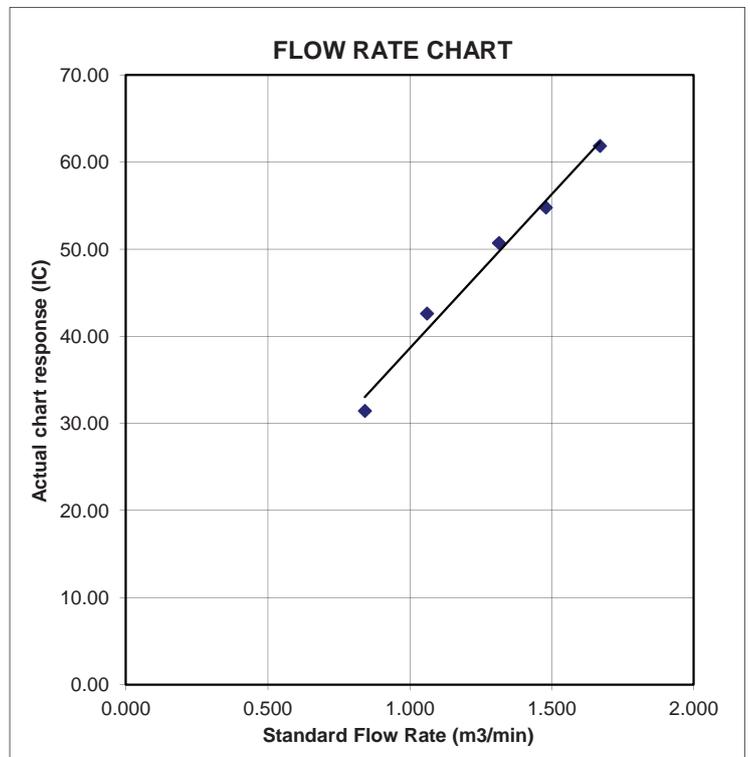

TSP SAMPLER CALIBRATION CALCULATION SPREADSHEET

| | | |
|-------------------------------------|------------------------|-----------|
| Location : Ping Yeung Village House | Date of Calibration: | 10/2/2018 |
| Location ID : AM5a | Next Calibration Date: | 10/4/2018 |
| | Technician: | Fai So |

CONDITIONS

| | | | |
|--------------------------|--------|----------------------------|--------|
| Sea Level Pressure (hPa) | 1017.4 | Corrected Pressure (mm Hg) | 763.05 |
| Temperature (°C) | 18.0 | Temperature (K) | 291 |

CALIBRATION ORIFICE

| | | | |
|-------------|-------|-------------------|----------|
| Make-> | TISCH | Qstd Slope -> | 2.11965 |
| Model-> | 5025A | Qstd Intercept -> | -0.02696 |
| Serial # -> | 1941 | | |

CALIBRATION

| Plate No. | H2O (L) (in) | H2O (R) (in) | H2O (in) | Qstd (m3/min) | I (chart) | IC corrected | LINEAR REGRESSION |
|-----------|--------------|--------------|----------|---------------|-----------|--------------|---|
| 18 | 6.5 | 6.5 | 13.0 | 1.738 | 50 | 50.70 | Slope = 30.3411 Intercept = -2.8525 Corr. coeff. = 0.9977 |
| 13 | 5 | 5 | 10.0 | 1.525 | 42 | 42.59 | |
| 10 | 4 | 4 | 8.0 | 1.366 | 38 | 38.53 | |
| 7 | 2.5 | 2.5 | 5.0 | 1.082 | 29 | 29.41 | |
| 5 | 1.5 | 1.5 | 3.0 | 0.841 | 23 | 23.32 | |

Calculations :

$$Qstd = 1/m[\text{Sqrt}(H20(Pa/Pstd)(Tstd/Ta))-b]$$

$$IC = I[\text{Sqrt}(Pa/Pstd)(Tstd/Ta)]$$

Qstd = standard flow rate

IC = corrected chart responses

I = actual chart response

m = calibrator Qstd slope

b = calibrator Qstd intercept

Ta = actual temperature during calibration (deg K)

Pstd = actual pressure during calibration (mm Hg)

For subsequent calculation of sampler flow:

$$1/m((I)[\text{Sqrt}(298/Tav)(Pav/760)]-b)$$


m = sampler slope

b = sampler intercept

I = chart response

Tav = daily average temperature

Pav = daily average pressure

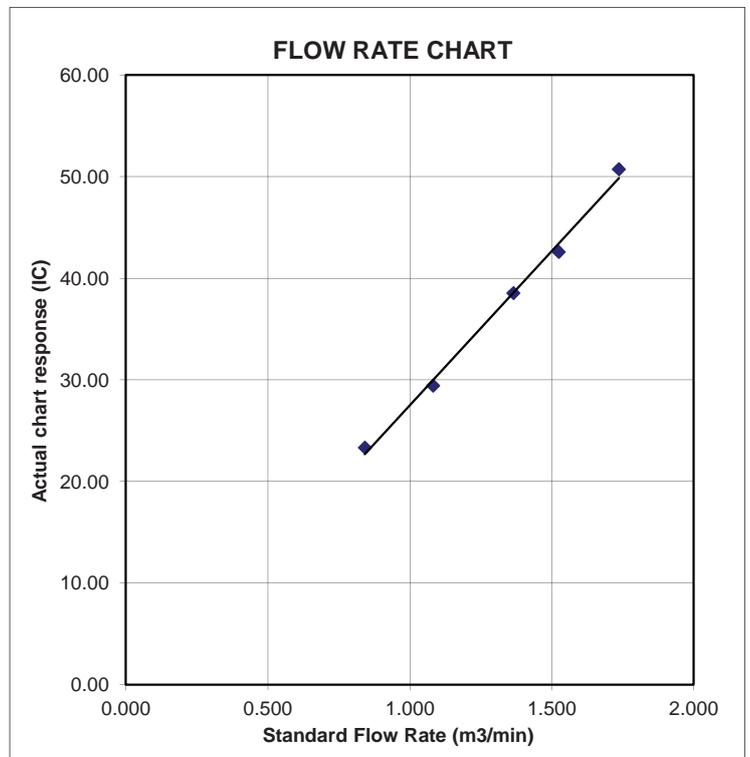

TSP SAMPLER CALIBRATION CALCULATION SPREADSHEET

| | | |
|---------------------------------------|------------------------|-----------|
| Location : Wo Keng Shan Village House | Date of Calibration: | 10/2/2018 |
| Location ID : AM6 | Next Calibration Date: | 10/4/2018 |
| | Technician: | Fai So |

CONDITIONS

| | | | |
|--------------------------|--------|----------------------------|--------|
| Sea Level Pressure (hPa) | 1017.4 | Corrected Pressure (mm Hg) | 763.05 |
| Temperature (°C) | 18.0 | Temperature (K) | 291 |

CALIBRATION ORIFICE

| | | | |
|-------------|-------|-------------------|----------|
| Make-> | TISCH | Qstd Slope -> | 2.11965 |
| Model-> | 5025A | Qstd Intercept -> | -0.02696 |
| Serial # -> | 1941 | | |

CALIBRATION

| Plate No. | H2O (L) (in) | H2O (R) (in) | H2O (in) | Qstd (m3/min) | I (chart) | IC corrected | LINEAR REGRESSION |
|-----------|--------------|--------------|----------|---------------|-----------|--------------|--|
| 18 | 6 | 6 | 12.0 | 1.670 | 57 | 57.80 | Slope = 40.8144 Intercept = -10.6594 Corr. coeff. = 0.9915 |
| 13 | 4.8 | 4.8 | 9.6 | 1.495 | 50 | 50.70 | |
| 10 | 3.7 | 3.7 | 7.4 | 1.314 | 43 | 43.60 | |
| 7 | 2.6 | 2.6 | 5.2 | 1.104 | 31 | 31.43 | |
| 5 | 1.5 | 1.5 | 3.0 | 0.841 | 25 | 25.35 | |
| | | | | | | | |

Calculations :

$$Qstd = 1/m[\text{Sqrt}(H20(Pa/Pstd)(Tstd/Ta))-b]$$

$$IC = I[\text{Sqrt}(Pa/Pstd)(Tstd/Ta)]$$

Qstd = standard flow rate

IC = corrected chart responses

I = actual chart response

m = calibrator Qstd slope

b = calibrator Qstd intercept

Ta = actual temperature during calibration (deg K)

Pstd = actual pressure during calibration (mm Hg)

For subsequent calculation of sampler flow:

$$1/m((I)[\text{Sqrt}(298/Tav)(Pav/760)]-b)$$


m = sampler slope

b = sampler intercept

I = chart response

Tav = daily average temperature

Pav = daily average pressure

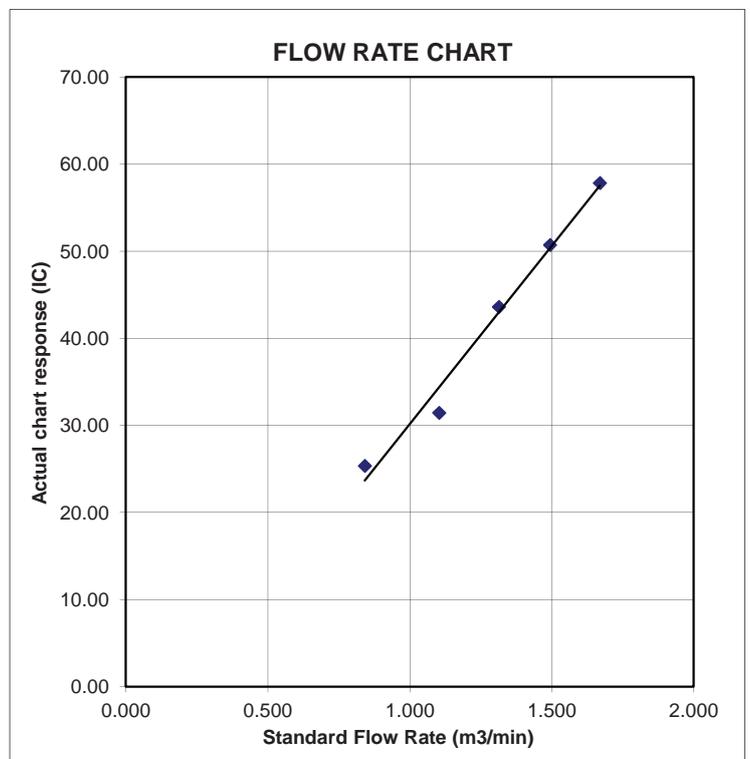

TSP SAMPLER CALIBRATION CALCULATION SPREADSHEET

| | |
|--|----------------------------------|
| Location : Village House of Loi Tung Village | Date of Calibration: 10/2/2018 |
| Location ID : AM7b | Next Calibration Date: 10/4/2018 |
| | Technician: Fai So |

CONDITIONS

| | | | |
|--------------------------|--------|----------------------------|--------|
| Sea Level Pressure (hPa) | 1017.4 | Corrected Pressure (mm Hg) | 763.05 |
| Temperature (°C) | 18.0 | Temperature (K) | 291 |

CALIBRATION ORIFICE

| | |
|------------------|----------------------------|
| Make-> TISCH | Qstd Slope -> 2.11965 |
| Model-> 5025A | Qstd Intercept -> -0.02696 |
| Serial # -> 1941 | |

CALIBRATION

| Plate No. | H2O (L) (in) | H2O (R) (in) | H2O (in) | Qstd (m3/min) | I (chart) | IC corrected | LINEAR REGRESSION |
|-----------|--------------|--------------|----------|---------------|-----------|--------------|--|
| 18 | 6.4 | 6.4 | 12.8 | 1.724 | 59 | 59.83 | Slope = 30.2259 Intercept = 8.3833 Corr. coeff. = 0.9933 |
| 13 | 4.9 | 4.9 | 9.8 | 1.510 | 54 | 54.76 | |
| 10 | 3.9 | 3.9 | 7.8 | 1.349 | 48 | 48.67 | |
| 7 | 2.3 | 2.3 | 4.6 | 1.039 | 41 | 41.57 | |
| 5 | 1.5 | 1.5 | 3.0 | 0.841 | 32 | 32.45 | |

Calculations :

$$Qstd = 1/m[\text{Sqrt}(H2O(Pa/Pstd)(Tstd/Ta))-b]$$


$$IC = I[\text{Sqrt}(Pa/Pstd)(Tstd/Ta)]$$

Qstd = standard flow rate
 IC = corrected chart responses
 I = actual chart response
 m = calibrator Qstd slope
 b = calibrator Qstd intercept
 Ta = actual temperature during calibration (deg K)
 Pstd = actual pressure during calibration (mm Hg)

For subsequent calculation of sampler flow:

$$1/m((I)[\text{Sqrt}(298/Tav)(Pav/760)]-b)$$

m = sampler slope
 b = sampler intercept
 I = chart response
 Tav = daily average temperature
 Pav = daily average pressure

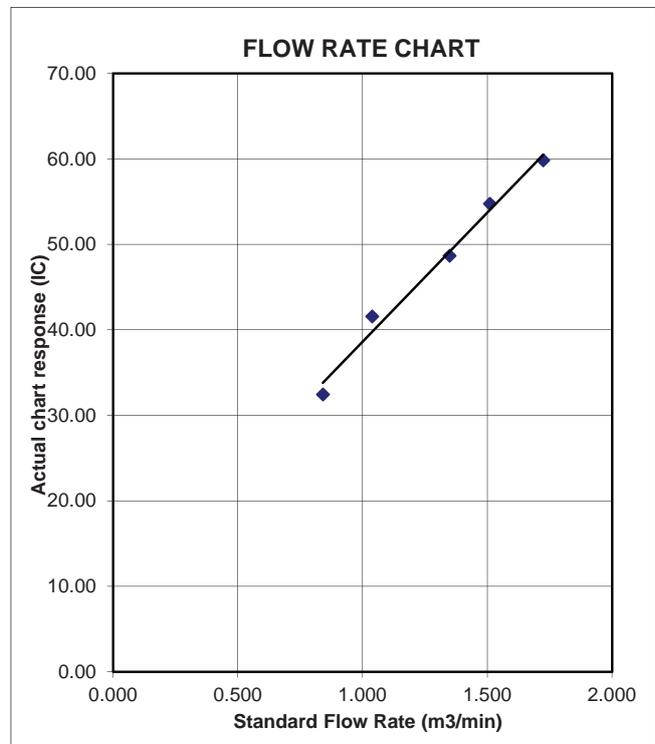

TSP SAMPLER CALIBRATION CALCULATION SPREADSHEET

Location : Po Kat Tsai Village No. 4
 Location ID : AM8

Date of Calibration: 10/2/2018
 Next Calibration Date: 10/4/2018
 Technician: Fai So

CONDITIONS

| | | | |
|--------------------------|--------|----------------------------|--------|
| Sea Level Pressure (hPa) | 1017.4 | Corrected Pressure (mm Hg) | 763.05 |
| Temperature (°C) | 18.0 | Temperature (K) | 291 |

CALIBRATION ORIFICE

| | | | |
|-------------|-------|-------------------|----------|
| Make-> | TISCH | Qstd Slope -> | 2.11965 |
| Model-> | 5025A | Qstd Intercept -> | -0.02696 |
| Serial # -> | 1941 | | |

CALIBRATION

| Plate No. | H2O (L) (in) | H2O (R) (in) | H2O (in) | Qstd (m3/min) | I (chart) | IC corrected | LINEAR REGRESSION Slope = 48.3070 Intercept = -20.6674 Corr. coeff. = 0.9970 |
|-----------|--------------|--------------|----------|---------------|-----------|--------------|---|
| 18 | 5.9 | 5.9 | 11.8 | 1.656 | 60 | 60.84 | |
| 13 | 5 | 5 | 10.0 | 1.525 | 51 | 51.71 | |
| 10 | 3.8 | 3.8 | 7.6 | 1.332 | 42 | 42.59 | |
| 7 | 2.4 | 2.4 | 4.8 | 1.061 | 31 | 31.43 | |
| 5 | 1.6 | 1.6 | 3.2 | 0.868 | 21 | 21.29 | |

Calculations :

$$Q_{std} = 1/m[\sqrt{H_2O(P_a/P_{std})(T_{std}/T_a)} - b]$$


$$IC = I[\sqrt{P_a/P_{std}}(T_{std}/T_a)]$$

Qstd = standard flow rate
 IC = corrected chart responses
 I = actual chart response
 m = calibrator Qstd slope
 b = calibrator Qstd intercept
 Ta = actual temperature during calibration (deg K)
 Pstd = actual pressure during calibration (mm Hg)

For subsequent calculation of sampler flow:

$$1/m((I)[\sqrt{298/T_{av}}(P_{av}/760)] - b)$$

m = sampler slope
 b = sampler intercept
 I = chart response
 Tav = daily average temperature
 Pav = daily average pressure

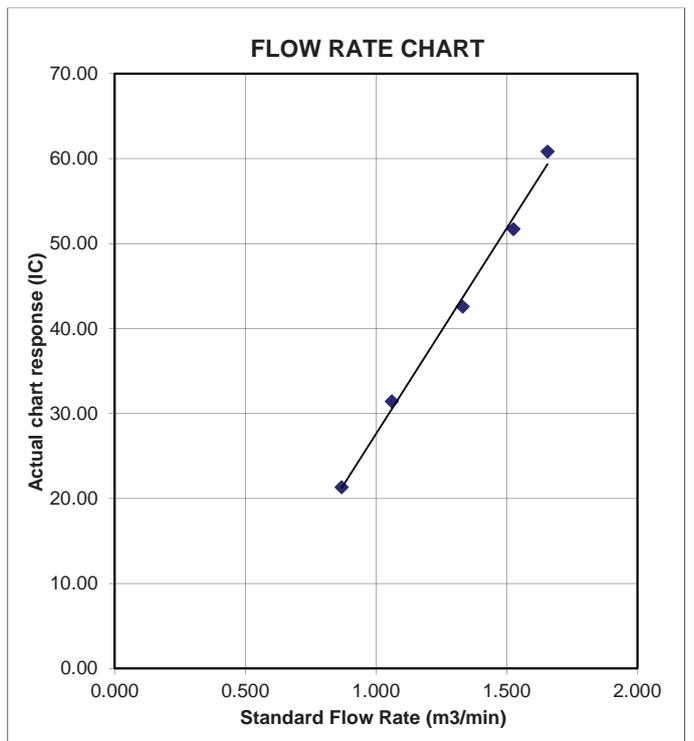

TSP SAMPLER CALIBRATION CALCULATION SPREADSHEET

Location : Nam Wa Po Village House No. 80
 Location ID : AM9b

Date of Calibration: 12/2/2018
 Next Calibration Date: 12/4/2018
 Technician: Fai So

CONDITIONS

| | | | |
|--------------------------|--------|----------------------------|-------|
| Sea Level Pressure (hPa) | 1026.4 | Corrected Pressure (mm Hg) | 769.8 |
| Temperature (°C) | 14.9 | Temperature (K) | 288 |

CALIBRATION ORIFICE

| | | | |
|-------------|-------|-------------------|----------|
| Make-> | TISCH | Qstd Slope -> | 2.11965 |
| Model-> | 5025A | Qstd Intercept -> | -0.02696 |
| Serial # -> | 1941 | | |

CALIBRATION

| Plate No. | H2O (L) (in) | H2O (R) (in) | H2O (in) | Qstd (m3/min) | I (chart) | IC corrected | LINEAR REGRESSION |
|-----------|--------------|--------------|----------|---------------|-----------|--------------|--|
| 18 | 6.3 | 6.3 | 12.6 | 1.727 | 55 | 56.32 | Slope = 32.0888 Intercept = 0.3969 Corr. coeff. = 0.9921 |
| 13 | 5.1 | 5.1 | 10.2 | 1.556 | 49 | 50.17 | |
| 10 | 3.8 | 3.8 | 7.6 | 1.344 | 41 | 41.98 | |
| 7 | 2.4 | 2.4 | 4.8 | 1.071 | 36 | 36.86 | |
| 5 | 1.6 | 1.6 | 3.2 | 0.877 | 27 | 27.65 | |

Calculations :

$$Qstd = 1/m[\text{Sqrt}(H2O(Pa/Pstd)(Tstd/Ta))-b]$$


$$IC = I[\text{Sqrt}(Pa/Pstd)(Tstd/Ta)]$$

Qstd = standard flow rate
 IC = corrected chart responses
 I = actual chart response
 m = calibrator Qstd slope
 b = calibrator Qstd intercept
 Ta = actual temperature during calibration (deg K)
 Pstd = actual pressure during calibration (mm Hg)

For subsequent calculation of sampler flow:

$$1/m((I)[\text{Sqrt}(298/Tav)(Pav/760)]-b)$$

m = sampler slope
 b = sampler intercept
 I = chart response
 Tav = daily average temperature
 Pav = daily average pressure

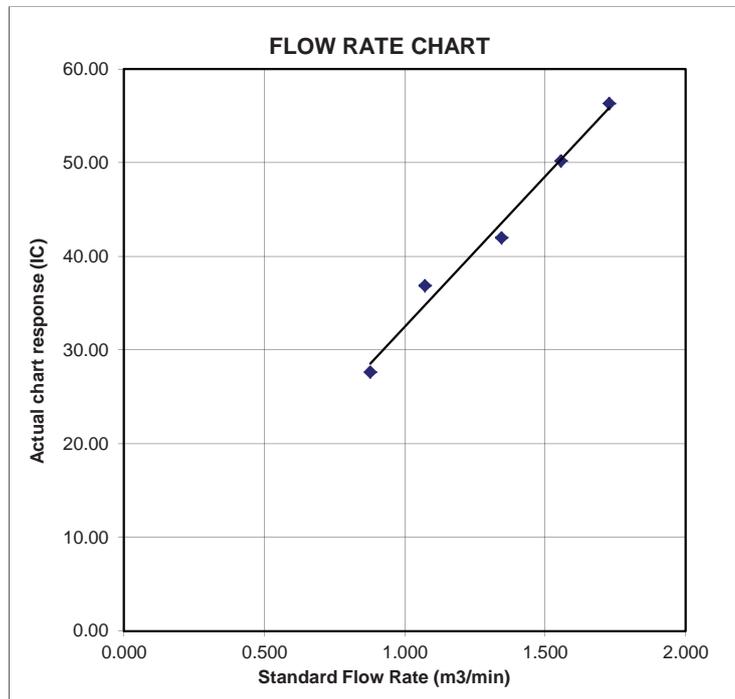



TISCH ENVIRONMENTAL, INC.
 145 SOUTH MIAMI AVE
 VILLAGE OF CLEVELAND, OH
 45002
 513.467.9000
 877.263.7610 TOLL FREE
 513.467.9009 FAX

ORIFICE TRANSFER STANDARD CERTIFICATION WORKSHEET TE-5025A

Date - Feb 28, 2017 Rootmeter S/N 0438320 Ta (K) - 294
 Operator Tisch Orifice I.D. - 1941 Pa (mm) - 750.57

| PLATE OR Run # | VOLUME START (m3) | VOLUME STOP (m3) | DIFF VOLUME (m3) | DIFF TIME (min) | METER | ORFICE |
|----------------------|-------------------------|------------------------|------------------------|-----------------------|--------------------|----------------------|
| | | | | | DIFF Hg (mm) | DIFF H2O (in.) |
| 1 | NA | NA | 1.00 | 1.4600 | 3.2 | 2.00 |
| 2 | NA | NA | 1.00 | 1.0410 | 6.4 | 4.00 |
| 3 | NA | NA | 1.00 | 0.9280 | 7.9 | 5.00 |
| 4 | NA | NA | 1.00 | 0.8840 | 8.7 | 5.50 |
| 5 | NA | NA | 1.00 | 0.7290 | 12.7 | 8.00 |

DATA TABULATION

| Vstd | (x axis) Qstd | (y axis) | Va | (x axis) Qa | (y axis) |
|--|------------------|----------|---|----------------|----------|
| 0.9967 | 0.6827 | 1.4149 | 0.9957 | 0.6820 | 0.8851 |
| 0.9925 | 0.9534 | 2.0010 | 0.9915 | 0.9524 | 1.2517 |
| 0.9904 | 1.0672 | 2.2372 | 0.9894 | 1.0661 | 1.3995 |
| 0.9894 | 1.1192 | 2.3464 | 0.9884 | 1.1181 | 1.4678 |
| 0.9840 | 1.3499 | 2.8299 | 0.9830 | 1.3485 | 1.7702 |
| Qstd slope (m) = 2.11965 | | | Qa slope (m) = 1.32729 | | |
| intercept (b) = -0.02696 | | | intercept (b) = -0.01686 | | |
| coefficient (r) = 0.99991 | | | coefficient (r) = 0.99991 | | |
| y axis = $\text{SQRT}[\text{H2O}(\text{Pa}/760)(298/\text{Ta})]$ | | | y axis = $\text{SQRT}[\text{H2O}(\text{Ta}/\text{Pa})]$ | | |

CALCULATIONS

$$\text{Vstd} = \text{Diff. Vol} [(\text{Pa} - \text{Diff. Hg}) / 760] (298 / \text{Ta})$$

$$\text{Qstd} = \text{Vstd} / \text{Time}$$

$$\text{Va} = \text{Diff Vol} [(\text{Pa} - \text{Diff Hg}) / \text{Pa}]$$

$$\text{Qa} = \text{Va} / \text{Time}$$

For subsequent flow rate calculations:

$$\text{Qstd} = 1/m \{ [\text{SQRT}(\text{H2O}(\text{Pa}/760)(298/\text{Ta}))] - b \}$$

$$\text{Qa} = 1/m \{ [\text{SQRT}(\text{H2O}(\text{Ta}/\text{Pa}))] - b \}$$

Equipment Verification Report (TSP)

Equipment Calibrated:

Type: Laser Dust monitor
 Manufacturer: Sibata LD-3B
 Serial No. 2X6145
 Equipment Ref: EQ105
 Job Order HK1815073

Standard Equipment:

Standard Equipment: Higher Volume Sampler
 Location & Location ID: AUES office (calibration room)
 Equipment Ref: HVS 018
 Last Calibration Date: 1 December 2017

Equipment Verification Results:


Testing Date: 5 January 2018

| Hour | Time | Mean Temp °C | Mean Pressure (hPa) | Concentration in mg/m ³ (Standard Equipment) | Total Count (Calibrated Equipment) | Count/Minute (Total Count/60min) |
|----------|---------------|--------------|---------------------|---|------------------------------------|----------------------------------|
| 2hr07min | 10:27 ~ 12:34 | 19.3 | 1015.3 | 0.011 | 511 | 4.0 |
| 2hr01min | 12:38 ~ 14:39 | 19.3 | 1015.3 | 0.012 | 598 | 4.9 |
| 2hr08min | 14:42 ~ 16:50 | 19.3 | 1015.3 | 0.036 | 2111 | 16.5 |

Sensitivity Adjustment Scale Setting (Before Calibration) 583 (CPM)
 Sensitivity Adjustment Scale Setting (After Calibration) 583 (CPM)

Linear Regression of Y or X

Slope (K-factor): 0.0022
 Correlation Coefficient 0.9981
 Date of Issue 9 January 2018

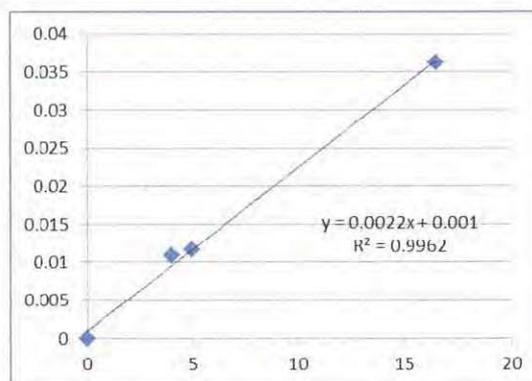

Remarks:

1. **Strong** Correlation ($R > 0.8$)
 2. Factor 0.0022 should be apply for TSP monitoring
- *If $R < 0.5$, repair or re-verification is required for the equipment

Operator : Martin Li Signature : [Signature] Date : 9 January 2018

QC Reviewer : Ben Tam Signature : [Signature] Date : 9 January 2018

TSP SAMPLER CALIBRATION CALCULATION SPREADSHEET

| | | |
|---------------|---|---------------------------------|
| Location : | Gold King Industrial Building, Kwai Chung | Date of Calibration: 1-Dec-17 |
| Location ID : | Calibration Room | Next Calibration Date: 1-Mar-18 |

CONDITIONS

| | | | |
|--------------------------|--------|----------------------------|-------|
| Sea Level Pressure (hPa) | 1018.8 | Corrected Pressure (mm Hg) | 764.1 |
| Temperature (°C) | 21.2 | Temperature (K) | 294 |

CALIBRATION ORIFICE

| | | | |
|--------------------|-----------|-------------------|-----------|
| Make-> | TISCH | Qstd Slope -> | 2.11965 |
| Model-> | 5025A | Qstd Intercept -> | -0.02696 |
| Calibration Date-> | 28-Feb-17 | Expiry Date-> | 28-Feb-18 |

CALIBRATION

| Plate No. | H2O (L) (in) | H2O (R) (in) | H2O (in) | Qstd (m3/min) | I (chart) | IC corrected | LINEAR REGRESSION |
|-----------|--------------|--------------|----------|---------------|-----------|--------------|--|
| 18 | 6.3 | 6.3 | 12.6 | 1.703 | 54 | 54.49 | Slope = 31.2239 Intercept = 0.7901 Corr. coeff. = 0.9971 |
| 13 | 5 | 5 | 10.0 | 1.518 | 48 | 48.44 | |
| 10 | 3.9 | 3.9 | 7.8 | 1.342 | 42 | 42.38 | |
| 8 | 2.4 | 2.4 | 4.8 | 1.056 | 32 | 32.29 | |
| 5 | 1.0 | 1.0 | 2.0 | 0.686 | 23 | 23.21 | |

Calculations :

$$Qstd = 1/m[\text{Sqrt}(H2O(Pa/Pstd)(Tstd/Ta))-b]$$

$$IC = I[\text{Sqrt}(Pa/Pstd)(Tstd/Ta)]$$

Qstd = standard flow rate

IC = corrected chart responses

I = actual chart response

m = calibrator Qstd slope

b = calibrator Qstd intercept

Ta = actual temperature during calibration (deg K)

Pstd = actual pressure during calibration (mm Hg)

For subsequent calculation of sampler flow:

$$1/m((I)[\text{Sqrt}(298/Tav)(Pav/760)]-b)$$


m = sampler slope

b = sampler intercept

I = chart response

Tav = daily average temperature

Pav = daily average pressure

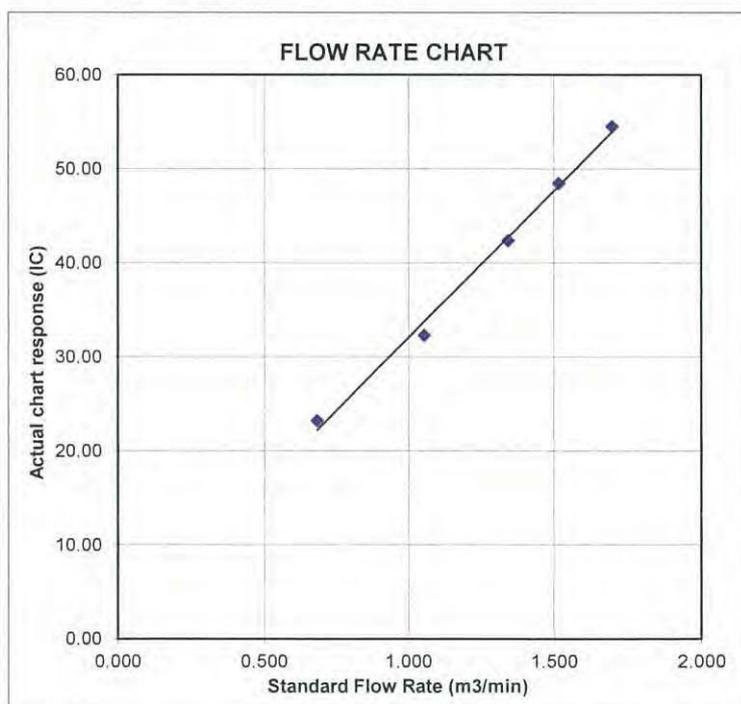

Equipment Verification Report (TSP)

Equipment Calibrated:

Type: Laser Dust monitor
 Manufacturer: Sibata LD-3B
 Serial No. 366409
 Equipment Ref: EQ109
 Job Order HK1815078

Standard Equipment:

Standard Equipment: Higher Volume Sampler
 Location & Location ID: AUES office (calibration room)
 Equipment Ref: HVS 018
 Last Calibration Date: 1 December 2017

Equipment Verification Results:


Testing Date: 5 January 2018

| Hour | Time | Mean Temp °C | Mean Pressure (hPa) | Concentration in mg/m ³ (Standard Equipment) | Total Count (Calibrated Equipment) | Count/Minute (Total Count/60min) |
|----------|---------------|--------------|---------------------|---|------------------------------------|----------------------------------|
| 2hr07min | 10:27 ~ 12:34 | 19.3 | 1015.3 | 0.011 | 474 | 3.7 |
| 2hr01min | 12:38 ~ 14:39 | 19.3 | 1015.3 | 0.012 | 577 | 4.8 |
| 2hr08min | 14:42 ~ 16:50 | 19.3 | 1015.3 | 0.036 | 2097 | 16.4 |

Sensitivity Adjustment Scale Setting (Before Calibration) 520 (CPM)
 Sensitivity Adjustment Scale Setting (After Calibration) 521 (CPM)

Linear Regression of Y or X

Slope (K-factor): 0.0022
 Correlation Coefficient 0.9967
 Date of Issue 9 January 2018

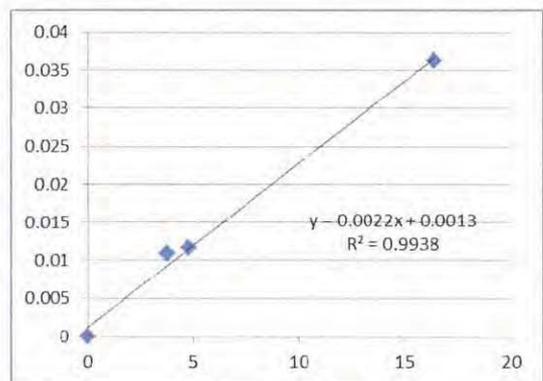

Remarks:

- Strong** Correlation ($R > 0.8$)
 - Factor 0.0022 should be apply for TSP monitoring
- *If $R < 0.5$, repair or re-verification is required for the equipment

Operator : Martin Li Signature : [Signature] Date : 9 January 2018

QC Reviewer : Ben Tam Signature : [Signature] Date : 9 January 2018

Equipment Verification Report (TSP)

Equipment Calibrated:

Type: Laser Dust monitor
 Manufacturer: Sibata LD-3B
 Serial No. 366410
 Equipment Ref: EQ110
 Job Order HK1815072

Standard Equipment:

Standard Equipment: Higher Volume Sampler
 Location & Location ID: AUES office (calibration room)
 Equipment Ref: HVS 018
 Last Calibration Date: 1 December 2017

Equipment Verification Results:


Testing Date: 5 January 2018

| Hour | Time | Mean Temp °C | Mean Pressure (hPa) | Concentration in mg/m ³ (Standard Equipment) | Total Count (Calibrated Equipment) | Count/Minute (Total Count/60min) |
|----------|---------------|--------------|---------------------|---|------------------------------------|----------------------------------|
| 2hr07min | 10:27 ~ 12:34 | 19.3 | 1015.3 | 0.011 | 498 | 3.9 |
| 2hr01min | 12:38 ~ 14:39 | 19.3 | 1015.3 | 0.012 | 571 | 4.7 |
| 2hr08min | 14:42 ~ 16:50 | 19.3 | 1015.3 | 0.036 | 2095 | 16.4 |

Sensitivity Adjustment Scale Setting (Before Calibration) 670 (CPM)
 Sensitivity Adjustment Scale Setting (After Calibration) 669 (CPM)

Linear Regression of Y or X

Slope (K-factor): 0.0022
 Correlation Coefficient 0.9977
 Date of Issue 9 January 2018

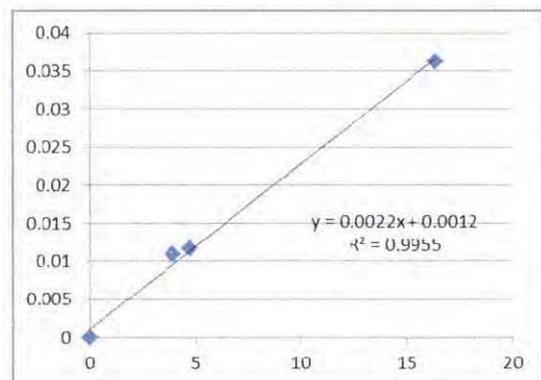

Remarks:

1. **Strong** Correlation ($R > 0.8$)
 2. Factor 0.0022 should be apply for TSP monitoring
- *If $R < 0.5$, repair or re-verification is required for the equipment

Operator : Martin Li Signature : [Signature] Date : 9 January 2018

QC Reviewer : Ben Tam Signature : [Signature] Date : 9 January 2018

TSP SAMPLER CALIBRATION CALCULATION SPREADSHEET

| | | |
|---------------|---|---------------------------------|
| Location : | Gold King Industrial Building, Kwai Chung | Date of Calibration: 1-Dec-17 |
| Location ID : | Calibration Room | Next Calibration Date: 1-Mar-18 |

CONDITIONS

| | | | |
|--------------------------|--------|----------------------------|-------|
| Sea Level Pressure (hPa) | 1018.8 | Corrected Pressure (mm Hg) | 764.1 |
| Temperature (°C) | 21.2 | Temperature (K) | 294 |

CALIBRATION ORIFICE

| | | | |
|--------------------|-----------|-------------------|-----------|
| Make-> | TISCH | Qstd Slope -> | 2.11965 |
| Model-> | 5025A | Qstd Intercept -> | -0.02696 |
| Calibration Date-> | 28-Feb-17 | Expiry Date-> | 28-Feb-18 |

CALIBRATION

| Plate No. | H2O (L) (in) | H2O (R) (in) | H2O (in) | Qstd (m3/min) | I (chart) | IC corrected | LINEAR REGRESSION | | |
|-----------|--------------|--------------|----------|---------------|-----------|--------------|-------------------|-------------|----------------|
| | | | | | | | Slope = | Intercept = | Corr. coeff. = |
| 18 | 6.3 | 6.3 | 12.6 | 1.703 | 54 | 54.49 | 31.2239 | 0.7901 | 0.9971 |
| 13 | 5 | 5 | 10.0 | 1.518 | 48 | 48.44 | | | |
| 10 | 3.9 | 3.9 | 7.8 | 1.342 | 42 | 42.38 | | | |
| 8 | 2.4 | 2.4 | 4.8 | 1.056 | 32 | 32.29 | | | |
| 5 | 1.0 | 1.0 | 2.0 | 0.686 | 23 | 23.21 | | | |

Calculations :

$$Qstd = 1/m[\text{Sqrt}(H2O(Pa/Pstd)(Tstd/Ta))-b]$$

$$IC = I[\text{Sqrt}(Pa/Pstd)(Tstd/Ta)]$$

Qstd = standard flow rate

IC = corrected chart responses

I = actual chart response

m = calibrator Qstd slope

b = calibrator Qstd intercept

Ta = actual temperature during calibration (deg K)

Pstd = actual pressure during calibration (mm Hg)

For subsequent calculation of sampler flow:

$$1/m((I)[\text{Sqrt}(298/Tav)(Pav/760)]-b)$$


m = sampler slope

b = sampler intercept

I = chart response

Tav = daily average temperature

Pav = daily average pressure

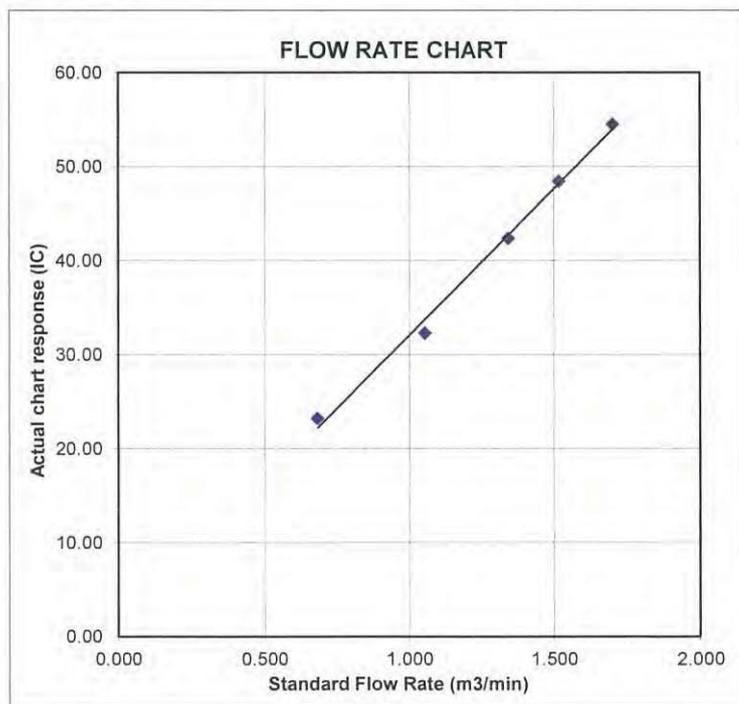

TSP SAMPLER CALIBRATION CALCULATION SPREADSHEET

| | | |
|---------------|---|---------------------------------|
| Location : | Gold King Industrial Building, Kwai Chung | Date of Calibration: 1-Dec-17 |
| Location ID : | Calibration Room | Next Calibration Date: 1-Mar-18 |

CONDITIONS

| | | | |
|--------------------------|--------|----------------------------|-------|
| Sea Level Pressure (hPa) | 1018.8 | Corrected Pressure (mm Hg) | 764.1 |
| Temperature (°C) | 21.2 | Temperature (K) | 294 |

CALIBRATION ORIFICE

| | | | |
|--------------------|-----------|-------------------|-----------|
| Make-> | TISCH | Qstd Slope -> | 2.11965 |
| Model-> | 5025A | Qstd Intercept -> | -0.02696 |
| Calibration Date-> | 28-Feb-17 | Expiry Date-> | 28-Feb-18 |

CALIBRATION

| Plate No. | H2O (L) (in) | H2O (R) (in) | H2O (in) | Qstd (m3/min) | I (chart) | IC corrected | LINEAR REGRESSION |
|-----------|--------------|--------------|----------|---------------|-----------|--------------|--|
| 18 | 6.3 | 6.3 | 12.6 | 1.703 | 54 | 54.49 | Slope = 31.2239 Intercept = 0.7901 Corr. coeff. = 0.9971 |
| 13 | 5 | 5 | 10.0 | 1.518 | 48 | 48.44 | |
| 10 | 3.9 | 3.9 | 7.8 | 1.342 | 42 | 42.38 | |
| 8 | 2.4 | 2.4 | 4.8 | 1.056 | 32 | 32.29 | |
| 5 | 1.0 | 1.0 | 2.0 | 0.686 | 23 | 23.21 | |

Calculations :

$$Qstd = 1/m[\text{Sqrt}(H2O(Pa/Pstd)(Tstd/Ta))-b]$$

$$IC = I[\text{Sqrt}(Pa/Pstd)(Tstd/Ta)]$$

Qstd = standard flow rate

IC = corrected chart responses

I = actual chart response

m = calibrator Qstd slope

b = calibrator Qstd intercept

Ta = actual temperature during calibration (deg K)

Pstd = actual pressure during calibration (mm Hg)

For subsequent calculation of sampler flow:

$$1/m((I)[\text{Sqrt}(298/Tav)(Pav/760)]-b)$$


m = sampler slope

b = sampler intercept

I = chart response

Tav = daily average temperature

Pav = daily average pressure

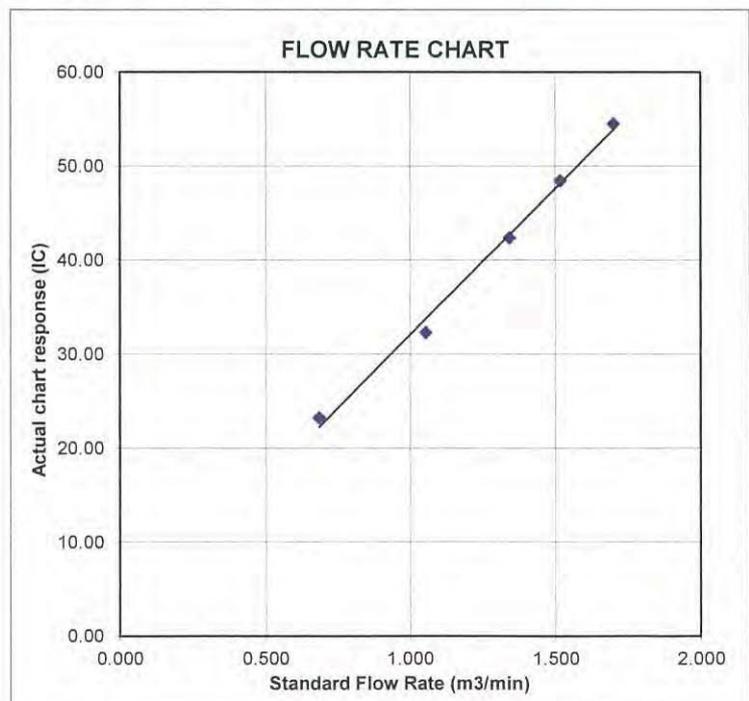

Equipment Verification Report (TSP)

Equipment Calibrated:

Type: Laser Dust monitor
 Manufacturer: Sibata LD-3B
 Serial No. 3Y6503
 Equipment Ref: EQ112
 Job Order HK1815077

Standard Equipment:

Standard Equipment: Higher Volume Sampler
 Location & Location ID: AUES office (calibration room)
 Equipment Ref: HVS 018
 Last Calibration Date: 1 December 2017

Equipment Verification Results:

Testing Date: 5 January 2018

| Hour | Time | Mean Temp °C | Mean Pressure (hPa) | Concentration in mg/m ³ (Standard Equipment) | Total Count (Calibrated Equipment) | Count/Minute (Total Count/60min) |
|----------|---------------|--------------|---------------------|---|------------------------------------|----------------------------------|
| 2hr07min | 10:27 ~ 12:34 | 19.3 | 1015.3 | 0.011 | 521 | 4.1 |
| 2hr01min | 12:38 ~ 14:39 | 19.3 | 1015.3 | 0.012 | 674 | 5.6 |
| 2hr08min | 14:42 ~ 16:50 | 19.3 | 1015.3 | 0.036 | 2077 | 16.3 |

Sensitivity Adjustment Scale Setting (Before Calibration) 661 (CPM)


Sensitivity Adjustment Scale Setting (After Calibration) 661 (CPM)

Linear Regression of Y or X

Slope (K-factor): 0.0022

Correlation Coefficient 0.9976

Date of Issue 9 January 2018

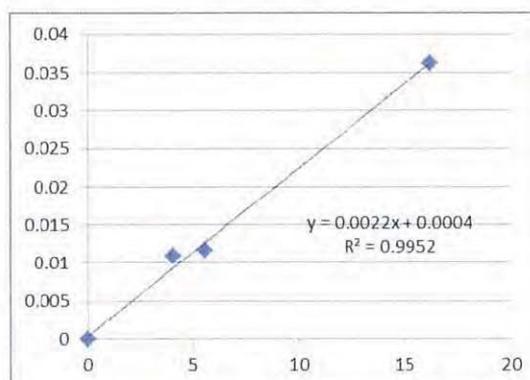

Remarks:

- Strong** Correlation ($R > 0.8$)
 - Factor 0.0022 should be apply for TSP monitoring
- *If $R < 0.5$, repair or re-verification is required for the equipment

Operator : Martin Li Signature : [Signature] Date : 9 January 2018

QC Reviewer : Ben Tam Signature : [Signature] Date : 9 January 2018

TSP SAMPLER CALIBRATION CALCULATION SPREADSHEET

| | | |
|---------------|---|---------------------------------|
| Location : | Gold King Industrial Building, Kwai Chung | Date of Calibration: 1-Dec-17 |
| Location ID : | Calibration Room | Next Calibration Date: 1-Mar-18 |

CONDITIONS

| | | | |
|--------------------------|--------|----------------------------|-------|
| Sea Level Pressure (hPa) | 1018.8 | Corrected Pressure (mm Hg) | 764.1 |
| Temperature (°C) | 21.2 | Temperature (K) | 294 |

CALIBRATION ORIFICE

| | | | |
|--------------------|-----------|-------------------|-----------|
| Make-> | TISCH | Qstd Slope -> | 2.11965 |
| Model-> | 5025A | Qstd Intercept -> | -0.02696 |
| Calibration Date-> | 28-Feb-17 | Expiry Date-> | 28-Feb-18 |

CALIBRATION

| Plate No. | H2O (L) (in) | H2O (R) (in) | H2O (in) | Qstd (m3/min) | I (chart) | IC corrected | LINEAR REGRESSION | | |
|-----------|--------------|--------------|----------|---------------|-----------|--------------|-------------------|-------------|----------------|
| | | | | | | | Slope = | Intercept = | Corr. coeff. = |
| 18 | 6.3 | 6.3 | 12.6 | 1.703 | 54 | 54.49 | 31.2239 | 0.7901 | 0.9971 |
| 13 | 5 | 5 | 10.0 | 1.518 | 48 | 48.44 | | | |
| 10 | 3.9 | 3.9 | 7.8 | 1.342 | 42 | 42.38 | | | |
| 8 | 2.4 | 2.4 | 4.8 | 1.056 | 32 | 32.29 | | | |
| 5 | 1.0 | 1.0 | 2.0 | 0.686 | 23 | 23.21 | | | |

Calculations :

$$Qstd = 1/m[\text{Sqrt}(H2O(Pa/Pstd)(Tstd/Ta))-b]$$

$$IC = I[\text{Sqrt}(Pa/Pstd)(Tstd/Ta)]$$

Qstd = standard flow rate

IC = corrected chart responses

I = actual chart response

m = calibrator Qstd slope

b = calibrator Qstd intercept

Ta = actual temperature during calibration (deg K)

Pstd = actual pressure during calibration (mm Hg)

For subsequent calculation of sampler flow:

$$1/m((I)[\text{Sqrt}(298/Tav)(Pav/760)]-b)$$


m = sampler slope

b = sampler intercept

I = chart response

Tav = daily average temperature

Pav = daily average pressure

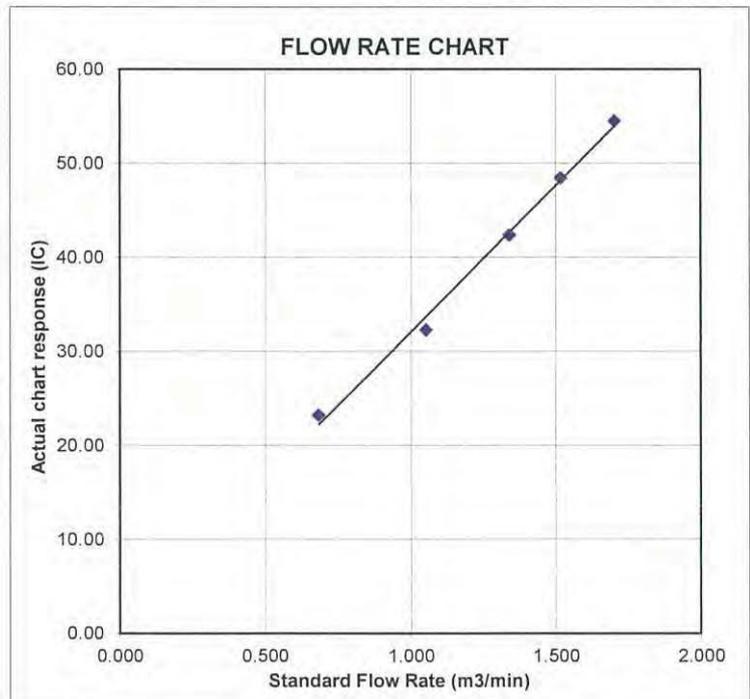

Equipment Verification Report (TSP)

Equipment Calibrated:

Type: Laser Dust monitor
Manufacturer: Sibata LD-3B
Serial No. 3Y6505
Equipment Ref: EQ114
Job Order HK1815074

Standard Equipment:

Standard Equipment: Higher Volume Sampler
Location & Location ID: AUES office (calibration room)
Equipment Ref: HVS 018
Last Calibration Date: 1 December 2017

Equipment Verification Results:

Testing Date: 5 January 2018

| Hour | Time | Mean Temp °C | Mean Pressure (hPa) | Concentration in mg/m ³ (Standard Equipment) | Total Count (Calibrated Equipment) | Count/Minute (Total Count/60min) |
|----------|---------------|--------------|---------------------|---|------------------------------------|----------------------------------|
| 2hr07min | 10:27 ~ 12:34 | 19.3 | 1015.3 | 0.011 | 677 | 5.3 |
| 2hr01min | 12:38 ~ 14:39 | 19.3 | 1015.3 | 0.012 | 601 | 5.0 |
| 2hr08min | 14:42 ~ 16:50 | 19.3 | 1015.3 | 0.036 | 2064 | 16.2 |

Sensitivity Adjustment Scale Setting (Before Calibration) 591 (CPM)

Sensitivity Adjustment Scale Setting (After Calibration) 590 (CPM)

Linear Regression of Y or X

Slope (K-factor): 0.0022


Correlation Coefficient 0.9991

Date of Issue 9 January 2018

Remarks:

1. **Strong** Correlation ($R > 0.8$)
2. Factor 0.0022 should be apply for TSP monitoring

*If $R < 0.5$, repair or re-verification is required for the equipment

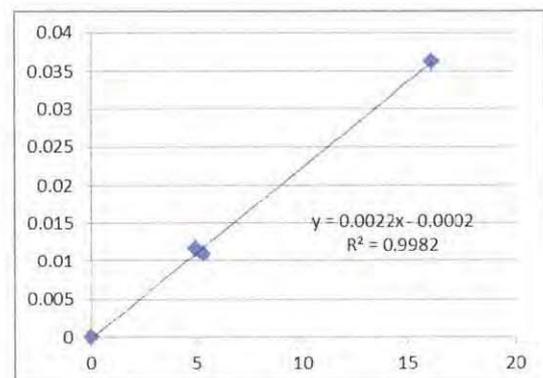

Operator : Martin Li Signature : [Signature] Date : 9 January 2018

QC Reviewer : Ben Tam Signature : [Signature] Date : 9 January 2018

TSP SAMPLER CALIBRATION CALCULATION SPREADSHEET

| | | |
|---------------|---|---------------------------------|
| Location : | Gold King Industrial Building, Kwai Chung | Date of Calibration: 1-Dec-17 |
| Location ID : | Calibration Room | Next Calibration Date: 1-Mar-18 |

CONDITIONS

| | | | |
|--------------------------|--------|----------------------------|-------|
| Sea Level Pressure (hPa) | 1018.8 | Corrected Pressure (mm Hg) | 764.1 |
| Temperature (°C) | 21.2 | Temperature (K) | 294 |

CALIBRATION ORIFICE

| | | | |
|--------------------|-----------|-------------------|-----------|
| Make-> | TISCH | Qstd Slope -> | 2.11965 |
| Model-> | 5025A | Qstd Intercept -> | -0.02696 |
| Calibration Date-> | 28-Feb-17 | Expiry Date-> | 28-Feb-18 |

CALIBRATION

| Plate No. | H2O (L) (in) | H2O (R) (in) | H2O (in) | Qstd (m3/min) | I (chart) | IC corrected | LINEAR REGRESSION |
|-----------|--------------|--------------|----------|---------------|-----------|--------------|--|
| 18 | 6.3 | 6.3 | 12.6 | 1.703 | 54 | 54.49 | Slope = 31.2239 Intercept = 0.7901 Corr. coeff. = 0.9971 |
| 13 | 5 | 5 | 10.0 | 1.518 | 48 | 48.44 | |
| 10 | 3.9 | 3.9 | 7.8 | 1.342 | 42 | 42.38 | |
| 8 | 2.4 | 2.4 | 4.8 | 1.056 | 32 | 32.29 | |
| 5 | 1.0 | 1.0 | 2.0 | 0.686 | 23 | 23.21 | |

Calculations :

$$Qstd = 1/m[\text{Sqrt}(H20(Pa/Pstd)(Tstd/Ta))-b]$$


$$IC = I[\text{Sqrt}(Pa/Pstd)(Tstd/Ta)]$$

Qstd = standard flow rate
 IC = corrected chart responses
 I = actual chart response
 m = calibrator Qstd slope
 b = calibrator Qstd intercept
 Ta = actual temperature during calibration (deg K)
 Pstd = actual pressure during calibration (mm Hg)

For subsequent calculation of sampler flow:

$$1/m((I)[\text{Sqrt}(298/Tav)(Pav/760)]-b)$$

m = sampler slope
 b = sampler intercept
 I = chart response
 Tav = daily average temperature
 Pav = daily average pressure

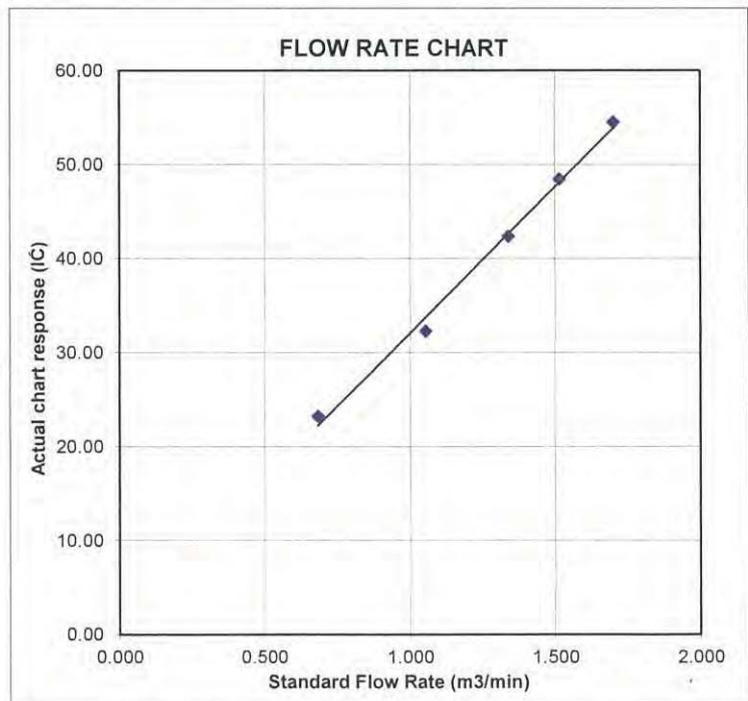



Certificate of Calibration 校正證書

Certificate No. : C174097
證書編號

ITEM TESTED / 送檢項目 (Job No. / 序引編號 : IC17-0924) Date of Receipt / 收件日期 : 14 July 2017
Description / 儀器名稱 : Sound Level Meter
Manufacturer / 製造商 : Rion
Model No. / 型號 : NL-52
Serial No. / 編號 : 00464681
Supplied By / 委託者 : Action-United Environmental Services and Consulting
Unit A, 20/F., Gold King Industrial Building,
35-41 Tai Lin Pai Road, Kwai Chung, N.T.

TEST CONDITIONS / 測試條件
Temperature / 溫度 : (23 ± 2)°C Relative Humidity / 相對濕度 : (55 ± 20)%
Line Voltage / 電壓 : ---


TEST SPECIFICATIONS / 測試規範
Calibration check


DATE OF TEST / 測試日期 : 22 July 2017

TEST RESULTS / 測試結果

The results apply to the particular unit-under-test only.
The results do not exceed manufacturer's specification.
The results are detailed in the subsequent page(s).

The test equipment used for calibration are traceable to National Standards via :
- The Government of The Hong Kong Special Administrative Region Standard & Calibration Laboratory
- Agilent Technologies / Keysight Technologies
- Rohde & Schwarz Laboratory, Germany
- Fluke Everett Service Center, USA

Tested By : 
測試 : _____
H T Wong
Technical Officer

Certified By : 
核證 : _____
K C Lee
Engineer

Date of Issue : 25 July 2017
簽發日期

The test equipment used for calibration are traceable to the Nation Standards as specified in this certificate. This certificate shall not be reproduced except in full, without the prior written approval of this laboratory.

本證書所載校正用之測試器材均可溯源至國際標準。局部複印本證書而未獲本實驗室書面批准。

Certificate of Calibration

校正證書

Certificate No. : C174097
證書編號

- The unit-under-test (UUT) was allowed to stabilize in the laboratory for over 12 hours, and switched on to warm up for over 10 minutes before the commencement of the test.
- Self-calibration was performed before the test.
- The results presented are the mean of 3 measurements at each calibration point.
- Test equipment :

| Equipment ID | Description | Certificate No. |
|--------------|-------------------------------------|-----------------|
| CL280 | 40 MHz Arbitrary Waveform Generator | C170048 |
| CL281 | Multifunction Acoustic Calibrator | PA160023 |

- Test procedure : MA101N.

- Results :

6.1 Sound Pressure Level

6.1.1 Reference Sound Pressure Level

| UUT Setting | | | | Applied Value | | UUT Reading (dB) | IEC 61672 Class 1 Spec. (dB) |
|-------------|----------------|---------------------|----------------|---------------|-------------|------------------|------------------------------|
| Range (dB) | Function | Frequency Weighting | Time Weighting | Level (dB) | Freq. (kHz) | | |
| 30 - 130 | L _A | A | Fast | 94.00 | 1 | 93.7 | ± 1.1 |

6.1.2 Linearity

| UUT Setting | | | | Applied Value | | UUT Reading (dB) |
|-------------|----------------|---------------------|----------------|---------------|-------------|------------------|
| Range (dB) | Function | Frequency Weighting | Time Weighting | Level (dB) | Freq. (kHz) | |
| 30 - 130 | L _A | A | Fast | 94.00 | 1 | 93.7 (Ref.) |
| | | | | 104.00 | | 103.7 |
| | | | | 114.00 | | 113.7 |

IEC 61672 Class 1 Spec. : ± 0.6 dB per 10 dB step and ± 1.1 dB for overall different.

6.2 Time Weighting

| UUT Setting | | | | Applied Value | | UUT Reading (dB) | IEC 61672 Class 1 Spec. (dB) |
|-------------|----------------|---------------------|----------------|---------------|-------------|------------------|------------------------------|
| Range (dB) | Function | Frequency Weighting | Time Weighting | Level (dB) | Freq. (kHz) | | |
| 30 - 130 | L _A | A | Fast | 94.00 | 1 | 93.7 | Ref. |
| | | | Slow | | | 93.7 | ± 0.3 |

The test equipment used for calibration are traceable to the Nation Standards as specified in this certificate. This certificate shall not be reproduced except in full, without the prior written approval of this laboratory.

本證書所載校正用之測試器材均可溯源至國際標準。局部複印本證書需先獲本實驗室書面批准。

Sun Creation Engineering Limited - Calibration & Testing Laboratory

Unit 4-F, Tong Shan Wan Exchange Building, 1 Hong On Lane, Tuen Mun, New Territories, Hong Kong

輝創工程有限公司 - 校正及檢測實驗室

Unit 4-F, Tong Shan Wan Exchange Building, 1 Hong On Lane, Tuen Mun, New Territories, Hong Kong

電話: 2937 2000 Fax: 傳真: 2744 8986

E-mail: 電郵: cal@scsuncreation.com

Website: 網址: www.suncreation.com

Certificate of Calibration

校正證書

Certificate No. : C174097
證書編號

6.3 Frequency Weighting

6.3.1 A-Weighting

| UUT Setting | | | | Applied Value | | UUT Reading (dB) | IEC 61672 Class 1 Spec. (dB) |
|-------------|----------------|---------------------|----------------|---------------|----------|------------------|------------------------------|
| Range (dB) | Function | Frequency Weighting | Time Weighting | Level (dB) | Freq. | | |
| 30 - 130 | L _A | A | Fast | 94.00 | 63 Hz | 67.4 | -26.2 ± 1.5 |
| | | | | | 125 Hz | 77.5 | -16.1 ± 1.5 |
| | | | | | 250 Hz | 85.0 | -8.6 ± 1.4 |
| | | | | | 500 Hz | 90.4 | -3.2 ± 1.4 |
| | | | | | 1 kHz | 93.7 | Ref. |
| | | | | | 2 kHz | 94.9 | +1.2 ± 1.6 |
| | | | | | 4 kHz | 94.7 | +1.0 ± 1.6 |
| | | | | | 8 kHz | 92.6 | -1.1 (+2.1 ; -3.1) |
| | | | | | 12.5 kHz | 89.2 | -4.3 (+3.0 ; -6.0) |

6.3.2 C-Weighting

| UUT Setting | | | | Applied Value | | UUT Reading (dB) | IEC 61672 Class 1 Spec. (dB) |
|-------------|----------------|---------------------|----------------|---------------|----------|------------------|------------------------------|
| Range (dB) | Function | Frequency Weighting | Time Weighting | Level (dB) | Freq. | | |
| 30 - 130 | L _C | C | Fast | 94.00 | 63 Hz | 92.8 | -0.8 ± 1.5 |
| | | | | | 125 Hz | 93.5 | -0.2 ± 1.5 |
| | | | | | 250 Hz | 93.7 | 0.0 ± 1.4 |
| | | | | | 500 Hz | 93.7 | 0.0 ± 1.4 |
| | | | | | 1 kHz | 93.7 | Ref. |
| | | | | | 2 kHz | 93.5 | -0.2 ± 1.6 |
| | | | | | 4 kHz | 92.9 | -0.8 ± 1.6 |
| | | | | | 8 kHz | 90.7 | -3.0 (+2.1 ; -3.1) |
| | | | | | 12.5 kHz | 87.3 | -6.2 (+3.0 ; -6.0) |

The test equipment used for calibration are traceable to the Nation Standards as specified in this certificate. This certificate shall not be reproduced except in full, without the prior written approval of this laboratory.

本證書所載校正用之測試器材均可溯源至國際標準。局部加印本證書需經本實驗室所書面批准。

Sun Creation Engineering Limited - Calibration & Testing Laboratory

c/o 4/F, Tsing Shan Wan Exchange Building, 1 Hing On Lane, Tuen Mun, New Territories, Hong Kong

輝創工程有限公司 - 校正及檢測實驗室

c/o 香港新界屯門興安里一號吉山灣樓四樓

Tel/電話: 2927 2608 Fax/傳真: 2744 8986 E-mail/電郵: callab@suncreation.com Website/網址: www.suncreation.com

Certificate of Calibration

校正證書

Certificate No. : C174097
證書編號

- Remarks : - UUT Microphone Model No. : UC-59 & S/N : 07619
- Mfr's Spec. : IEC 61672 Class 1
- Uncertainties of Applied Value :
- | | | |
|--------|------------------|--------------------------|
| 94 dB | : 63 Hz - 125 Hz | : ± 0.35 dB |
| | 250 Hz - 500 Hz | : ± 0.30 dB |
| | 1 kHz | : ± 0.20 dB |
| | 2 kHz - 4 kHz | : ± 0.35 dB |
| | 8 kHz | : ± 0.45 dB |
| | 12.5 kHz | : ± 0.70 dB |
| 104 dB | : 1 kHz | : ± 0.10 dB (Ref. 94 dB) |
| 114 dB | : 1 kHz | : ± 0.10 dB (Ref. 94 dB) |
- The uncertainties are for a confidence probability of not less than 95 %.

Note :

Only the original copy or the laboratory's certified true copy is valid.

The values given in this Certificate only relate to the values measured at the time of the test and any uncertainties quoted will not include allowance for the equipment long term drift, variations with environment changes, vibration and shock during transportation, overloading, mis-handling, or the capability of any other laboratory to repeat the measurement. Sun Creation Engineering Limited shall not be liable for any loss or damage resulting from the use of the equipment.



輝創工程

輝創工程有限公司

Sun Creation Engineering Limited

Calibration and Testing Laboratory

Certificate of Calibration 校正證書

Certificate No. : C172288
證書編號

ITEM TESTED / 送檢項目 (Job No. / 序引編號 : IC17-0924)

Date of Receipt / 收件日期 : 24 April 2017

Description / 儀器名稱 : Integrating Sound Level Meter (EQ006)
Manufacturer / 製造商 : Brüel & Kjær
Model No. / 型號 : 2238
Serial No. / 編號 : 2285762
Supplied By / 委託者 : Action-United Environmental Services and Consulting
Unit A, 20/F., Gold King Industrial Building,
35-41 Tai Lin Pai Road, Kwai Chung, N.T.

TEST CONDITIONS / 測試條件

Temperature / 溫度 : $(23 \pm 2)^{\circ}\text{C}$

Relative Humidity / 相對濕度 : $(55 \pm 20)\%$

Line Voltage / 電壓 : ---

TEST SPECIFICATIONS / 測試規範

Calibration check

DATE OF TEST / 測試日期 : 28 April 2017


TEST RESULTS / 測試結果

The results apply to the particular unit-under-test only.
The results do not exceed manufacturer's specification.
The results are detailed in the subsequent page(s).

The test equipment used for calibration are traceable to National Standards via :

- The Government of The Hong Kong Special Administrative Region Standard & Calibration Laboratory
- Agilent Technologies / Keysight Technologies
- Rohde & Schwarz Laboratory, Germany
- Fluke Everett Service Center, USA

Tested By
測試


H T Wong
Technical Officer

Certified By
核證


K C Lee
Project Engineer

Date of Issue
簽發日期

2 May 2017

The test equipment used for calibration are traceable to the Nation Standards as specified in this certificate. This certificate shall not be reproduced except in full, without the prior written approval of this laboratory.

本證書所載校正用之測試器材均可溯源至國際標準。局部複印本證書需先獲本實驗室書面批准。

Sun Creation Engineering Limited - Calibration & Testing Laboratory

c/o 4/F, Tsing Shan Wan Exchange Building, 1 Hing On Lane, Tuen Mun, New Territories, Hong Kong

輝創工程有限公司 - 校正及檢測實驗室

c/o 香港新界屯門興安里一號青山灣機樓四樓

Tel/電話: 2927 2606

Fax/傳真: 2744 8986

E-mail/電郵: callab@suncreation.com

Website/網址: www.suncreation.com

Certificate of Calibration

校正證書

Certificate No. : C172288

證書編號

1. The unit-under-test (UUT) was allowed to stabilize in the laboratory for over 12 hours, and switched on to warm up for over 10 minutes before the commencement of the test.
2. Self-calibration using laboratory acoustic calibrator was performed before the test from 6.1.1.2 to 6.4.
3. The results presented are the mean of 3 measurements at each calibration point.
4. Test equipment :

| <u>Equipment ID</u> | <u>Description</u> | <u>Certificate No.</u> |
|---------------------|-------------------------------------|------------------------|
| CL280 | 40 MHz Arbitrary Waveform Generator | C170048 |
| CL281 | Multifunction Acoustic Calibrator | PA160023 |

5. Test procedure : MA101N.

6. Results :

- 6.1 Sound Pressure Level

- 6.1.1 Reference Sound Pressure Level

- 6.1.1.1 Before Self-calibration

| UUT Setting | | | | Applied Value | | UUT Reading (dB) |
|-------------|------------------|---------------------|----------------|---------------|-------------|------------------|
| Range (dB) | Parameter | Frequency Weighting | Time Weighting | Level (dB) | Freq. (kHz) | |
| 50 - 130 | L _{AFP} | A | F | 94.00 | 1 | 94.1 |

- 6.1.1.2 After Self-calibration

| UUT Setting | | | | Applied Value | | UUT Reading (dB) | IEC 60651 Type 1 Spec. (dB) |
|-------------|------------------|---------------------|----------------|---------------|-------------|------------------|-----------------------------|
| Range (dB) | Parameter | Frequency Weighting | Time Weighting | Level (dB) | Freq. (kHz) | | |
| 50 - 130 | L _{AFP} | A | F | 94.00 | 1 | 94.0 | ± 0.7 |

- 6.1.2 Linearity

| UUT Setting | | | | Applied Value | | UUT Reading (dB) |
|-------------|------------------|---------------------|----------------|---------------|-------------|------------------|
| Range (dB) | Parameter | Frequency Weighting | Time Weighting | Level (dB) | Freq. (kHz) | |
| 50 - 130 | L _{AFP} | A | F | 94.00 | 1 | 94.0 (Ref.) |
| | | | | 104.00 | | 104.0 |
| | | | | 114.00 | | 114.0 |

IEC 60651 Type 1 Spec. : ± 0.4 dB per 10 dB step and ± 0.7 dB for overall different.

The test equipment used for calibration are traceable to the Nation Standards as specified in this certificate. This certificate shall not be reproduced except in full, without the prior written approval of this laboratory.

本證書所載校正用之測試器材均可溯源至國際標準，局部複印本證書需先獲本實驗室書面批准。

Sun Creation Engineering Limited – Calibration & Testing Laboratory

c/o 4/F, Tsing Shan Wan Exchange Building, 1 Hing On Lane, Tuen Mun, New Territories, Hong Kong

輝創工程有限公司 – 校正及檢測實驗室

c/o 香港新界屯門興安里一號青山灣機樓四樓

Tel/電話: 2927 2606 Fax/傳真: 2744 8986 E-mail/電郵: callab@suncreation.com Website/網址: www.suncreation.com

Certificate of Calibration

校正證書

Certificate No. : C172288

證書編號

6.2 Time Weighting

6.2.1 Continuous Signal

| UUT Setting | | | | Applied Value | | UUT Reading (dB) | IEC 60651 Type 1 Spec. (dB) |
|-------------|------------------|---------------------|----------------|---------------|-------------|------------------|-----------------------------|
| Range (dB) | Parameter | Frequency Weighting | Time Weighting | Level (dB) | Freq. (kHz) | | |
| 50 - 130 | L _{AFP} | A | F | 94.00 | 1 | 94.0 | Ref. |
| | L _{ASP} | | S | | | 94.1 | ± 0.1 |
| | L _{AIP} | | I | | | 94.1 | ± 0.1 |

6.2.2 Tone Burst Signal (2 kHz)

| UUT Setting | | | | Applied Value | | UUT Reading (dB) | IEC 60651 Type 1 Spec. (dB) |
|-------------|--------------------|---------------------|----------------|---------------|----------------|------------------|-----------------------------|
| Range (dB) | Parameter | Frequency Weighting | Time Weighting | Level (dB) | Burst Duration | | |
| 30 - 110 | L _{AFP} | A | F | 106.0 | Continuous | 106.0 | Ref. |
| | L _{AFMax} | | | | 200 ms | 105.0 | -1.0 ± 1.0 |
| | L _{ASP} | | S | | Continuous | 106.0 | Ref. |
| | L _{ASMax} | | | | 500 ms | 102.0 | -4.1 ± 1.0 |

6.3 Frequency Weighting

6.3.1 A-Weighting

| UUT Setting | | | | Applied Value | | UUT Reading (dB) | IEC 60651 Type 1 Spec. (dB) |
|-------------|------------------|---------------------|----------------|---------------|---------|------------------|-----------------------------|
| Range (dB) | Parameter | Frequency Weighting | Time Weighting | Level (dB) | Freq. | | |
| 50 - 130 | L _{AFP} | A | F | 94.00 | 31.5 Hz | 55.1 | -39.4 ± 1.5 |
| | | | | | 63 Hz | 68.0 | -26.2 ± 1.5 |
| | | | | | 125 Hz | 77.8 | -16.1 ± 1.0 |
| | | | | | 250 Hz | 85.3 | -8.6 ± 1.0 |
| | | | | | 500 Hz | 90.8 | -3.2 ± 1.0 |
| | | | | | 1 kHz | 94.0 | Ref. |
| | | | | | 2 kHz | 95.2 | +1.2 ± 1.0 |
| | | | | | 4 kHz | 95.0 | +1.0 ± 1.0 |
| | | | | | 8 kHz | 92.9 | -1.1 (+1.5 ; -3.0) |
| 12.5 kHz | 89.8 | -4.3 (+3.0 ; -6.0) | | | | | |

The test equipment used for calibration are traceable to the Nation Standards as specified in this certificate. This certificate shall not be reproduced except in full, without the prior written approval of this laboratory.

本證書所載校正用之測試器材均可溯源至國際標準。局部複印本證書需先獲本實驗室所書面批准。

Certificate of Calibration

校正證書

Certificate No. : C172288
證書編號

6.3.2 C-Weighting

| Range (dB) | UUT Setting | | | Applied Value | | UUT Reading (dB) | IEC 60651 Type 1 Spec. (dB) |
|------------|------------------|---------------------|----------------|---------------|----------|------------------|-----------------------------|
| | Parameter | Frequency Weighting | Time Weighting | Level (dB) | Freq. | | |
| 50 - 130 | L _{CFP} | C | F | 94.00 | 31.5 Hz | 91.5 | -3.0 ± 1.5 |
| | | | | | 63 Hz | 93.4 | -0.8 ± 1.5 |
| | | | | | 125 Hz | 93.9 | -0.2 ± 1.0 |
| | | | | | 250 Hz | 94.1 | 0.0 ± 1.0 |
| | | | | | 500 Hz | 94.1 | 0.0 ± 1.0 |
| | | | | | 1 kHz | 94.1 | Ref. |
| | | | | | 2 kHz | 93.9 | -0.2 ± 1.0 |
| | | | | | 4 kHz | 93.2 | -0.8 ± 1.0 |
| | | | | | 8 kHz | 91.0 | -3.0 (+1.5 ; -3.0) |
| | | | | | 12.5 kHz | 87.9 | -6.2 (+3.0 ; -6.0) |

6.4 Time Averaging

| Range (dB) | UUT Setting | | | Applied Value | | | | | UUT Reading (dB) | IEC 60804 Type 1 Spec. (dB) |
|------------|-------------------|---------------------|------------------|-----------------|---------------------|-------------------|------------------|-----------------------|-------------------|-----------------------------|
| | Parameter | Frequency Weighting | Integrating Time | Frequency (kHz) | Burst Duration (ms) | Burst Duty Factor | Burst Level (dB) | Equivalent Level (dB) | | |
| 30 - 110 | L _{Act} | A | 10 sec. | 4 | 1 | 1/10 | 110.0 | 100 | 100.0 | ± 0.5 |
| | | | | | | | | 90 | 89.9 | ± 0.5 |
| | | | | | | | | 80 | 79.2 | ± 1.0 |
| | | | | | | | | 70 | 69.2 | ± 1.0 |
| | | | | | | | | 60 sec. | 1/10 ² | |
| 5 min. | 1/10 ³ | | | | | | | | | |

Remarks : - UUT Microphone Model No. : 4188 & S/N : 2812705

- Mfr's Spec. : IEC 60651 Type 1 & IEC 60804 Type 1

- Uncertainties of Applied Value :

| | | |
|------------------------|--------------------|---|
| 94 dB | : 31.5 Hz - 125 Hz | : ± 0.35 dB |
| | 250 Hz - 500 Hz | : ± 0.30 dB |
| | 1 kHz | : ± 0.20 dB |
| | 2 kHz - 4 kHz | : ± 0.35 dB |
| | 8 kHz | : ± 0.45 dB |
| | 12.5 kHz | : ± 0.70 dB |
| 104 dB | : 1 kHz | : ± 0.10 dB (Ref. 94 dB) |
| 114 dB | : 1 kHz | : ± 0.10 dB (Ref. 94 dB) |
| Burst equivalent level | | : ± 0.2 dB (Ref. 110 dB continuous sound level) |

- The uncertainties are for a confidence probability of not less than 95 %.

Note :

Only the original copy or the laboratory's certified true copy is valid.

The values given in this Certificate only relate to the values measured at the time of the test and any uncertainties quoted will not include allowance for the equipment long term drift, variations with environment changes, vibration and shock during transportation, overloading, mis-handling, or the capability of any other laboratory to repeat the measurement. Sun Creation Engineering Limited shall not be liable for any loss or damage resulting from the use of the equipment.

The test equipment used for calibration are traceable to the Nation Standards as specified in this certificate. This certificate shall not be reproduced except in full, without the prior written approval of this laboratory.

本證書所載校正用之測試器材均可溯源至國際標準。局部複印本證書需先獲本實驗室所書面批准。

Sun Creation Engineering Limited – Calibration & Testing Laboratory

c/o 4/F, Tsing Shan Wan Exchange Building, 1 Hing On Lane, Tuen Mun, New Territories, Hong Kong

輝創工程有限公司 – 校正及檢測實驗室

c/o 香港新界屯門與安里一號青山灣機樓四樓

Tel/電話: 2927 2606

Fax/傳真: 2744 8986

E-mail/電郵: callab@suncreation.com

Website/網址: www.suncreation.com



Certificate of Calibration 校正證書

Certificate No. : C172287
證書編號

ITEM TESTED / 送檢項目 (Job No. / 序引編號 : IC17-0924) Date of Receipt / 收件日期 : 24 April 2017
Description / 儀器名稱 : Sound Level Meter (EQ015)
Manufacturer / 製造商 : Rion
Model No. / 型號 : NL-52
Serial No. / 編號 : 00142581
Supplied By / 委託者 : Action-United Environmental Services and Consulting
Unit A, 20/F., Gold King Industrial Building,
35-41 Tai Lin Pai Road, Kwai Chung, N.T.

TEST CONDITIONS / 測試條件

Temperature / 溫度 : $(23 \pm 2)^{\circ}\text{C}$ Relative Humidity / 相對濕度 : $(55 \pm 20)\%$
Line Voltage / 電壓 : ---

TEST SPECIFICATIONS / 測試規範

Calibration check


DATE OF TEST / 測試日期 : 28 April 2017

TEST RESULTS / 測試結果

The results apply to the particular unit-under-test only.
The results do not exceed manufacturer's specification.
The results are detailed in the subsequent page(s).

The test equipment used for calibration are traceable to National Standards via :

- The Government of The Hong Kong Special Administrative Region Standard & Calibration Laboratory
- Agilent Technologies / Keysight Technologies
- Rohde & Schwarz Laboratory, Germany
- Fluke Everett Service Center, USA

Tested By : 
測試 : H T Wong
Technical Officer

Certified By : 
核證 : K C Lee
Project Engineer

Date of Issue : 2 May 2017
簽發日期

The test equipment used for calibration are traceable to the Nation Standards as specified in this certificate. This certificate shall not be reproduced except in full, without the prior written approval of this laboratory.

本證書所載校正用之測試器材均可溯源至國際標準。局部複印本證書需先獲本實驗室所書面批准。

Certificate of Calibration

校正證書

Certificate No. : C172287

證書編號

1. The unit-under-test (UUT) was allowed to stabilize in the laboratory for over 12 hours, and switched on to warm up for over 10 minutes before the commencement of the test.
2. Self-calibration was performed before the test.
3. The results presented are the mean of 3 measurements at each calibration point.
4. Test equipment :

| Equipment ID | Description | Certificate No. |
|--------------|-------------------------------------|-----------------|
| CL280 | 40 MHz Arbitrary Waveform Generator | C170048 |
| CL281 | Multifunction Acoustic Calibrator | PA160023 |

5. Test procedure : MA101N.

6. Results :

- 6.1 Sound Pressure Level

- 6.1.1 Reference Sound Pressure Level

| UUT Setting | | | | Applied Value | | UUT Reading (dB) | IEC 61672 Class 1 Spec. (dB) |
|-------------|----------------|---------------------|----------------|---------------|-------------|------------------|------------------------------|
| Range (dB) | Function | Frequency Weighting | Time Weighting | Level (dB) | Freq. (kHz) | | |
| 30 - 130 | L _A | A | Fast | 94.00 | 1 | 94.3 | ± 1.1 |

- 6.1.2 Linearity

| UUT Setting | | | | Applied Value | | UUT Reading (dB) |
|-------------|----------------|---------------------|----------------|---------------|-------------|------------------|
| Range (dB) | Function | Frequency Weighting | Time Weighting | Level (dB) | Freq. (kHz) | |
| 30 - 130 | L _A | A | Fast | 94.00 | 1 | 94.3 (Ref.) |
| | | | | 104.00 | | 104.3 |
| | | | | 114.00 | | 114.3 |

IEC 61672 Class 1 Spec. : ± 0.6 dB per 10 dB step and ± 1.1 dB for overall different.

- 6.2 Time Weighting

| UUT Setting | | | | Applied Value | | UUT Reading (dB) | IEC 61672 Class 1 Spec. (dB) |
|-------------|----------------|---------------------|----------------|---------------|-------------|------------------|------------------------------|
| Range (dB) | Function | Frequency Weighting | Time Weighting | Level (dB) | Freq. (kHz) | | |
| 30 - 130 | L _A | A | Fast | 94.00 | 1 | 94.3 | Ref. |
| | | | Slow | | | 94.3 | ± 0.3 |

The test equipment used for calibration are traceable to the Nation Standards as specified in this certificate. This certificate shall not be reproduced except in full, without the prior written approval of this laboratory.

本證書所載校正用之測試器材均可溯源至國際標準。局部複印本證書需先獲本實驗室所書面批准。

Certificate of Calibration

校正證書

Certificate No. : C172287

證書編號

6.3 Frequency Weighting

6.3.1 A-Weighting

| UUT Setting | | | | Applied Value | | UUT Reading (dB) | IEC 61672 Class 1 Spec. (dB) |
|-------------|----------------|---------------------|----------------|---------------|----------|------------------|------------------------------|
| Range (dB) | Function | Frequency Weighting | Time Weighting | Level (dB) | Freq. | | |
| 30 - 130 | L _A | A | Fast | 94.00 | 63 Hz | 68.1 | -26.2 ± 1.5 |
| | | | | | 125 Hz | 78.1 | -16.1 ± 1.5 |
| | | | | | 250 Hz | 85.6 | -8.6 ± 1.4 |
| | | | | | 500 Hz | 91.0 | -3.2 ± 1.4 |
| | | | | | 1 kHz | 94.3 | Ref. |
| | | | | | 2 kHz | 95.5 | +1.2 ± 1.6 |
| | | | | | 4 kHz | 95.3 | +1.0 ± 1.6 |
| | | | | | 8 kHz | 93.3 | -1.1 (+2.1 ; -3.1) |
| | | | | | 12.5 kHz | 89.9 | -4.3 (+3.0 ; -6.0) |

6.3.2 C-Weighting

| UUT Setting | | | | Applied Value | | UUT Reading (dB) | IEC 61672 Class 1 Spec. (dB) |
|-------------|----------------|---------------------|----------------|---------------|----------|------------------|------------------------------|
| Range (dB) | Function | Frequency Weighting | Time Weighting | Level (dB) | Freq. | | |
| 30 - 130 | L _C | C | Fast | 94.00 | 63 Hz | 93.4 | -0.8 ± 1.5 |
| | | | | | 125 Hz | 94.1 | -0.2 ± 1.5 |
| | | | | | 250 Hz | 94.3 | 0.0 ± 1.4 |
| | | | | | 500 Hz | 94.3 | 0.0 ± 1.4 |
| | | | | | 1 kHz | 94.3 | Ref. |
| | | | | | 2 kHz | 94.1 | -0.2 ± 1.6 |
| | | | | | 4 kHz | 93.5 | -0.8 ± 1.6 |
| | | | | | 8 kHz | 91.4 | -3.0 (+2.1 ; -3.1) |
| | | | | | 12.5 kHz | 87.9 | -6.2 (+3.0 ; -6.0) |

The test equipment used for calibration are traceable to the Nation Standards as specified in this certificate. This certificate shall not be reproduced except in full, without the prior written approval of this laboratory.

本證書所載校正用之測試器材均可溯源至國際標準。局部複印本證書需先獲本實驗室書面批准。



Certificate of Calibration 校正證書

Certificate No. : C172287
證書編號

- Remarks : - UUT Microphone Model No. : UC-59 & S/N : 06015
- Mfr's Spec. : IEC 61672 Class 1
- Uncertainties of Applied Value :
- | | | |
|--------|------------------|--------------------------|
| 94 dB | : 63 Hz - 125 Hz | : ± 0.35 dB |
| | 250 Hz - 500 Hz | : ± 0.30 dB |
| | 1 kHz | : ± 0.20 dB |
| | 2 kHz - 4 kHz | : ± 0.35 dB |
| | 8 kHz | : ± 0.45 dB |
| | 12.5 kHz | : ± 0.70 dB |
| 104 dB | : 1 kHz | : ± 0.10 dB (Ref. 94 dB) |
| 114 dB | : 1 kHz | : ± 0.10 dB (Ref. 94 dB) |
- The uncertainties are for a confidence probability of not less than 95 %.

Note :

Only the original copy or the laboratory's certified true copy is valid.

The values given in this Certificate only relate to the values measured at the time of the test and any uncertainties quoted will not include allowance for the equipment long term drift, variations with environment changes, vibration and shock during transportation, overloading, mis-handling, or the capability of any other laboratory to repeat the measurement. Sun Creation Engineering Limited shall not be liable for any loss or damage resulting from the use of the equipment.

The test equipment used for calibration are traceable to the Nation Standards as specified in this certificate. This certificate shall not be reproduced except in full, without the prior written approval of this laboratory.

本證書所載校正用之測試器材均可溯源至國際標準。局部複印本證書需先獲本實驗室書面批准。

Certificate of Calibration

校正證書

Certificate No. : C172286
證書編號

ITEM TESTED / 送檢項目 (Job No. / 序引編號 : IC17-0924)

Date of Receipt / 收件日期 : 24 April 2017

Description / 儀器名稱 : Sound Level Meter (EQ067)
Manufacturer / 製造商 : Rion
Model No. / 型號 : NL-31
Serial No. / 編號 : 00410221
Supplied By / 委託者 : Action-United Environmental Services and Consulting
Unit A, 20/F., Gold King Industrial Building,
35-41 Tai Lin Pai Road, Kwai Chung, N.T.

TEST CONDITIONS / 測試條件

Temperature / 溫度 : (23 ± 2)°C

Relative Humidity / 相對濕度 : (55 ± 20)%

Line Voltage / 電壓 : ---

TEST SPECIFICATIONS / 測試規範

Calibration check

DATE OF TEST / 測試日期 : 28 April 2017

TEST RESULTS / 測試結果

The results apply to the particular unit-under-test only.
The results do not exceed manufacturer's specification.
The results are detailed in the subsequent page(s).

The test equipment used for calibration are traceable to National Standards via :

- The Government of The Hong Kong Special Administrative Region Standard & Calibration Laboratory
- Agilent Technologies / Keysight Technologies
- Rohde & Schwarz Laboratory, Germany
- Fluke Everett Service Center, USA

Tested By
測試


H T Wong
Technical Officer

Certified By
核證


K C Lee
Project Engineer

Date of Issue
簽發日期

2 May 2017

The test equipment used for calibration are traceable to the Nation Standards as specified in this certificate. This certificate shall not be reproduced except in full, without the prior written approval of this laboratory.

本證書所載校正用之測試器材均可溯源至國際標準。局部複印本證書需先獲本實驗所書面批准。

Certificate of Calibration

校正證書

Certificate No. : C172286
證書編號

- The unit-under-test (UUT) was allowed to stabilize in the laboratory for over 12 hours, and switched on to warm up for over 10 minutes before the commencement of the test.
- Self-calibration was performed before the test.
- The results presented are the mean of 3 measurements at each calibration point.
- Test equipment :

| Equipment ID | Description | Certificate No. |
|--------------|-------------------------------------|-----------------|
| CL280 | 40 MHz Arbitrary Waveform Generator | C170048 |
| CL281 | Multifunction Acoustic Calibrator | PA160023 |

- Test procedure : MA101N.

- Results :

6.1 Sound Pressure Level

6.1.1 Reference Sound Pressure Level

| UUT Setting | | | | Applied Value | | UUT Reading (dB) | IEC 61672 Class 1 Spec. (dB) |
|-------------|----------------|---------------------|----------------|---------------|-------------|------------------|------------------------------|
| Range (dB) | Mode | Frequency Weighting | Time Weighting | Level (dB) | Freq. (kHz) | | |
| 30 - 120 | L _A | A | Fast | 94.00 | 1 | 93.1 | ± 1.1 |

6.1.2 Linearity

| UUT Setting | | | | Applied Value | | UUT Reading (dB) |
|-------------|----------------|---------------------|----------------|---------------|-------------|------------------|
| Range (dB) | Mode | Frequency Weighting | Time Weighting | Level (dB) | Freq. (kHz) | |
| 30 - 120 | L _A | A | Fast | 94.00 | 1 | 93.1 (Ref.) |
| | | | | 104.00 | | 103.1 |
| | | | | 114.00 | | 113.2 |

IEC 61672 Class 1 Spec. : ± 0.6 dB per 10 dB step and ± 1.1 dB for overall different.

6.2 Time Weighting

| UUT Setting | | | | Applied Value | | UUT Reading (dB) | IEC 61672 Class 1 Spec. (dB) |
|-------------|----------------|---------------------|----------------|---------------|-------------|------------------|------------------------------|
| Range (dB) | Mode | Frequency Weighting | Time Weighting | Level (dB) | Freq. (kHz) | | |
| 30 - 120 | L _A | A | Fast | 94.00 | 1 | 93.1 | Ref. |
| | | | Slow | | | 93.1 | ± 0.3 |

The test equipment used for calibration are traceable to the Nation Standards as specified in this certificate. This certificate shall not be reproduced except in full, without the prior written approval of this laboratory.

本證書所載校正用之測試器材均可溯源至國際標準。局部複印本證書需先獲本實驗室所書面批准。

Certificate of Calibration

校正證書

Certificate No. : C172286
證書編號

6.3 Frequency Weighting

6.3.1 A-Weighting

| UUT Setting | | | | Applied Value | | UUT Reading (dB) | IEC 61672 Class 1 Spec. (dB) |
|-------------|----------------|---------------------|----------------|---------------|----------|------------------|------------------------------|
| Range (dB) | Mode | Frequency Weighting | Time Weighting | Level (dB) | Freq. | | |
| 30 - 120 | L _A | A | Fast | 94.00 | 63 Hz | 66.8 | -26.2 ± 1.5 |
| | | | | | 125 Hz | 76.9 | -16.1 ± 1.5 |
| | | | | | 250 Hz | 84.4 | -8.6 ± 1.4 |
| | | | | | 500 Hz | 89.8 | -3.2 ± 1.4 |
| | | | | | 1 kHz | 93.1 | Ref. |
| | | | | | 2 kHz | 94.4 | +1.2 ± 1.6 |
| | | | | | 4 kHz | 94.2 | +1.0 ± 1.6 |
| | | | | | 8 kHz | 92.0 | -1.1 (+2.1 ; -3.1) |
| | | | | | 12.5 kHz | 89.2 | -4.3 (+3.0 ; -6.0) |

6.3.2 C-Weighting

| UUT Setting | | | | Applied Value | | UUT Reading (dB) | IEC 61672 Class 1 Spec. (dB) |
|-------------|----------------|---------------------|----------------|---------------|----------|------------------|------------------------------|
| Range (dB) | Mode | Frequency Weighting | Time Weighting | Level (dB) | Freq. | | |
| 30 - 120 | L _C | C | Fast | 94.00 | 63 Hz | 92.2 | -0.8 ± 1.5 |
| | | | | | 125 Hz | 92.9 | -0.2 ± 1.5 |
| | | | | | 250 Hz | 93.1 | 0.0 ± 1.4 |
| | | | | | 500 Hz | 93.1 | 0.0 ± 1.4 |
| | | | | | 1 kHz | 93.1 | Ref. |
| | | | | | 2 kHz | 93.0 | -0.2 ± 1.6 |
| | | | | | 4 kHz | 92.4 | -0.8 ± 1.6 |
| | | | | | 8 kHz | 90.2 | -3.0 (+2.1 ; -3.1) |
| | | | | | 12.5 kHz | 87.3 | -6.2 (+3.0 ; -6.0) |

The test equipment used for calibration are traceable to the Nation Standards as specified in this certificate. This certificate shall not be reproduced except in full, without the prior written approval of this laboratory.

本證書所載校正用之測試器材均可溯源至國際標準。局部複印本證書需先獲本實驗室書面批准。



輝創工程有限公司

Sun Creation Engineering Limited

Calibration and Testing Laboratory

Certificate of Calibration

校正證書

Certificate No. : C172286
證書編號

Remarks : - UUT Microphone Model No. : UC-53A & S/N : 319734

- Mfr's Spec. : IEC 61672 Class 1

- Uncertainties of Applied Value : 94 dB : 63 Hz - 125 Hz : ± 0.35 dB
250 Hz - 500 Hz : ± 0.30 dB
1 kHz : ± 0.20 dB
2 kHz - 4 kHz : ± 0.35 dB
8 kHz : ± 0.45 dB
12.5 kHz : ± 0.70 dB
104 dB : 1 kHz : ± 0.10 dB (Ref. 94 dB)
114 dB : 1 kHz : ± 0.10 dB (Ref. 94 dB)

- The uncertainties are for a confidence probability of not less than 95 %.

Note :

Only the original copy or the laboratory's certified true copy is valid.

The values given in this Certificate only relate to the values measured at the time of the test and any uncertainties quoted will not include allowance for the equipment long term drift, variations with environment changes, vibration and shock during transportation, overloading, mis-handling, or the capability of any other laboratory to repeat the measurement. Sun Creation Engineering Limited shall not be liable for any loss or damage resulting from the use of the equipment.

The test equipment used for calibration are traceable to the Nation Standards as specified in this certificate. This certificate shall not be reproduced except in full, without the prior written approval of this laboratory.

本證書所載校正用之測試器材均可溯源至國際標準。局部複印本證書需先獲本實驗室書面批准。

Sun Creation Engineering Limited – Calibration & Testing Laboratory

c/o 4/F, Tsing Shan Wan Exchange Building, 1 Hing On Lane, Tuen Mun, New Territories, Hong Kong

輝創工程有限公司 – 校正及檢測實驗室

c/o 香港新界屯門興安里一號青山灣機樓四樓

Tel/電話: 2927 2606 Fax/傳真: 2744 8986 E-mail/電郵: callab@suncreation.com Website/網址: www.suncreation.com



輝創工程有限公司

Sun Creation Engineering Limited

Calibration and Testing Laboratory

Certificate of Calibration 校正證書

Certificate No. : C172284

證書編號

ITEM TESTED / 送檢項目 (Job No. / 序引編號 : IC17-0924)

Date of Receipt / 收件日期 : 24 April 2017

Description / 儀器名稱 : Acoustical Calibrator (EQ082)

Manufacturer / 製造商 : Brüel & Kjær

Model No. / 型號 : 4231

Serial No. / 編號 : 2713428

Supplied By / 委託者 : Action-United Environmental Services and Consulting
Unit A, 20/F., Gold King Industrial Building,
35-41 Tai Lin Pai Road, Kwai Chung, N.T.

TEST CONDITIONS / 測試條件

Temperature / 溫度 : $(23 \pm 2)^{\circ}\text{C}$

Relative Humidity / 相對濕度 : $(55 \pm 20)\%$

Line Voltage / 電壓 : ---

TEST SPECIFICATIONS / 測試規範

Calibration check

DATE OF TEST / 測試日期 : 28 April 2017

TEST RESULTS / 測試結果

The results apply to the particular unit-under-test only.

The results do not exceed manufacturer's specification.


The results are detailed in the subsequent page(s).

The test equipment used for calibration are traceable to National Standards via :

- The Government of The Hong Kong Special Administrative Region Standard & Calibration Laboratory
- Agilent Technologies / Keysight Technologies
- Rohde & Schwarz Laboratory, Germany
- Fluke Everett Service Center, USA

Tested By

測試


H T Wong
Technical Officer

Certified By

核證


K C Lee
Project Engineer

Date of Issue

簽發日期

2 May 2017

The test equipment used for calibration are traceable to the Nation Standards as specified in this certificate. This certificate shall not be reproduced except in full, without the prior written approval of this laboratory.

本證書所載校正用之測試器材均可溯源至國際標準。局部複印本證書需先獲本實驗室書面批准。

Sun Creation Engineering Limited – Calibration & Testing Laboratory

c/o 4/F, Tsing Shan Wan Exchange Building, 1 Hing On Lane, Tuen Mun, New Territories, Hong Kong

輝創工程有限公司 – 校正及檢測實驗室

c/o 香港新界屯門興安里一號青山灣機樓四樓

Tel/電話: 2927 2606

Fax/傳真: 2744 8986

E-mail/電郵: callab@suncreation.com

Website/網址: www.suncreation.com

Certificate of Calibration

校正證書

Certificate No. : C172284

證書編號

- The unit-under-test (UUT) was allowed to stabilize in the laboratory for over 12 hours before the commencement of the test.
- The results presented are the mean of 3 measurements at each calibration point.
- Test equipment :

| <u>Equipment ID</u> | <u>Description</u> | <u>Certificate No.</u> |
|---------------------|-----------------------------------|------------------------|
| CL130 | Universal Counter | C163709 |
| CL281 | Multifunction Acoustic Calibrator | PA160023 |
| TST150A | Measuring Amplifier | C161175 |

- Test procedure : MA100N.

- Results :

5.1 Sound Level Accuracy

| UUT Nominal Value | Measured Value (dB) | Mfr's Spec. (dB) | Uncertainty of Measured Value (dB) |
|----------------------|------------------------|---------------------|---------------------------------------|
| 94 dB, 1 kHz | 94.0 | ± 0.2 | ± 0.2 |
| 114 dB, 1 kHz | 114.1 | | |

5.2 Frequency Accuracy

| UUT Nominal Value (kHz) | Measured Value (kHz) | Mfr's Spec. | Uncertainty of Measured Value (Hz) |
|----------------------------|-------------------------|----------------|---------------------------------------|
| 1 | 1.000 0 | 1 kHz ± 0.1 % | ± 0.1 |

Remark : The uncertainties are for a confidence probability of not less than 95 %.

Note :

Only the original copy or the laboratory's certified true copy is valid.

The values given in this Certificate only relate to the values measured at the time of the test and any uncertainties quoted will not include allowance for the equipment long term drift, variations with environment changes, vibration and shock during transportation, overloading, mis-handling, or the capability of any other laboratory to repeat the measurement. Sun Creation Engineering Limited shall not be liable for any loss or damage resulting from the use of the equipment.



輝創工程有限公司

Sun Creation Engineering Limited

Calibration and Testing Laboratory

Certificate of Calibration

校正證書

Certificate No. : C172285

證書編號

ITEM TESTED / 送檢項目 (Job No. / 序引編號 : IC17-0924)

Date of Receipt / 收件日期 : 24 April 2017

Description / 儀器名稱 : Sound Level Calibrator (EQ088)

Manufacturer / 製造商 : Quest

Model No. / 型號 : QC-20

Serial No. / 編號 : QO9090006

Supplied By / 委託者 : Action-United Environmental Services and Consulting
Unit A, 20/F., Gold King Industrial Building,
35-41 Tai Lin Pai Road, Kwai Chung, N.T.

TEST CONDITIONS / 測試條件

Temperature / 溫度 : $(23 \pm 2)^{\circ}\text{C}$

Relative Humidity / 相對濕度 : $(55 \pm 20)\%$

Line Voltage / 電壓 : ---

TEST SPECIFICATIONS / 測試規範

Calibration check

DATE OF TEST / 測試日期 : 28 April 2017

TEST RESULTS / 測試結果

The results apply to the particular unit-under-test only.

The results do not exceed manufacturer's specification.


The results are detailed in the subsequent page(s).

The test equipment used for calibration are traceable to National Standards via :

- The Government of The Hong Kong Special Administrative Region Standard & Calibration Laboratory
- Agilent Technologies / Keysight Technologies
- Rohde & Schwarz Laboratory, Germany
- Fluke Everett Service Center, USA


Tested By

測試


H T Wong
Technical Officer

Certified By

核證

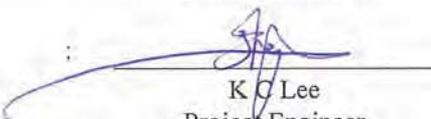
K C Lee
Project Engineer

Date of Issue

簽發日期

2 May 2017

The test equipment used for calibration are traceable to the Nation Standards as specified in this certificate. This certificate shall not be reproduced except in full, without the prior written approval of this laboratory.

本證書所載校正用之測試器材均可溯源至國際標準。局部複印本證書需先獲本實驗室書面批准。

Sun Creation Engineering Limited – Calibration & Testing Laboratory

c/o 4/F, Tsing Shan Wan Exchange Building, 1 Hing On Lane, Tuen Mun, New Territories, Hong Kong

輝創工程有限公司 – 校正及檢測實驗室

c/o 香港新界屯門興安里一號青山灣機樓四樓

Tel/電話: 2927 2606

Fax/傳真: 2744 8986

E-mail/電郵: callab@suncreation.com

Website/網址: www.suncreation.com

Certificate of Calibration

校正證書

Certificate No. : C172285
證書編號

- The unit-under-test (UUT) was allowed to stabilize in the laboratory for over 12 hours before the commencement of the test.
- The results presented are the mean of 3 measurements at each calibration point.
- Test equipment :

| <u>Equipment ID</u> | <u>Description</u> | <u>Certificate No.</u> |
|---------------------|-----------------------------------|------------------------|
| CL130 | Universal Counter | C163709 |
| CL281 | Multifunction Acoustic Calibrator | PA160023 |
| TST150A | Measuring Amplifier | C161175 |

- Test procedure : MA100N.

- Results :

5.1 Sound Level Accuracy

| UUT Nominal Value | Measured Value (dB) | Mfr's Spec. (dB) | Uncertainty of Measured Value (dB) |
|----------------------|------------------------|---------------------|---------------------------------------|
| 94 dB, 1 kHz | 94.2 | ± 0.3 | ± 0.2 |
| 114 dB, 1 kHz | 114.2 | | |

5.2 Frequency Accuracy

| UUT Nominal Value (kHz) | Measured Value (kHz) | Mfr's Spec. | Uncertainty of Measured Value (Hz) |
|----------------------------|-------------------------|----------------|---------------------------------------|
| 1 | 0.991 | ± 2 % | ± 1 |

Remark : - The uncertainties are for a confidence probability of not less than 95 %.

Note :

Only the original copy or the laboratory's certified true copy is valid.

The values given in this Certificate only relate to the values measured at the time of the test and any uncertainties quoted will not include allowance for the equipment long term drift, variations with environment changes, vibration and shock during transportation, overloading, mis-handling, or the capability of any other laboratory to repeat the measurement. Sun Creation Engineering Limited shall not be liable for any loss or damage resulting from the use of the equipment.

The test equipment used for calibration are traceable to the Nation Standards as specified in this certificate. This certificate shall not be reproduced except in full, without the prior written approval of this laboratory.

本證書所載校正用之測試器材均可溯源至國際標準。局部複印本證書需先獲本實驗室書面批准。

Sun Creation Engineering Limited – Calibration & Testing Laboratory

c/o 4/F, Tsing Shan Wan Exchange Building, 1 Hing On Lane, Tuen Mun, New Territories, Hong Kong

輝創工程有限公司 – 校正及檢測實驗室

c/o 香港新界屯門興安里一號青山灣機樓四樓

Tel/電話: 2927 2606 Fax/傳真: 2744 8986 E-mail/電郵: callab@suncreation.com Website/網址: www.suncreation.com

Certificate of Calibration

校正證書

Certificate No. : C174095
證書編號

ITEM TESTED / 送檢項目 (Job No. / 序引編號 : IC17-0924)

Date of Receipt / 收件日期 : 14 July 2017

Description / 儀器名稱 : Sound Calibrator
Manufacturer / 製造商 : Rion
Model No. / 型號 : NC-74
Serial No. / 編號 : 34657231
Supplied By / 委託者 : Action-United Environmental Services and Consulting
Unit A, 20/F., Gold King Industrial Building,
35-41 Tai Lin Pai Road, Kwai Chung, N.T.

TEST CONDITIONS / 測試條件

Temperature / 溫度 : $(23 \pm 2)^{\circ}\text{C}$
Line Voltage / 電壓 : ---

Relative Humidity / 相對濕度 : $(55 \pm 20)\%$

TEST SPECIFICATIONS / 測試規範

Calibration check

DATE OF TEST / 測試日期 : 22 July 2017

TEST RESULTS / 測試結果

The results apply to the particular unit-under-test only.
The results do not exceed manufacturer's specification.
The results are detailed in the subsequent page(s).


The test equipment used for calibration are traceable to National Standards via :

- The Government of The Hong Kong Special Administrative Region Standard & Calibration Laboratory
- Agilent Technologies / Keysight Technologies
- Rohde & Schwarz Laboratory, Germany
- Fluke Everett Service Center, USA

Tested By
測試


H T Wong
Technical Officer

Certified By
核證


K C Lee
Engineer

Date of Issue
簽發日期

25 July 2017

The test equipment used for calibration are traceable to the National Standards as specified in this certificate. This certificate shall not be reproduced except in full without the prior written approval of this laboratory.

本證書所載校準用之測試器材均可溯源至國際標準。局部複印本證書需先獲本實驗室書面批准。



Certificate of Calibration

校正證書

Certificate No. : C174095
證書編號

- The unit-under-test (UUT) was allowed to stabilize in the laboratory for over 12 hours before the commencement of the test.
- The results presented are the mean of 3 measurements at each calibration point.
- Test equipment :

| Equipment ID | Description | Certificate No. |
|--------------|-----------------------------------|-----------------|
| CL130 | Universal Counter | C173864 |
| CL281 | Multifunction Acoustic Calibrator | PA160023 |
| TST150A | Measuring Amplifier | C161175 |

4. Test procedure : MA100N.

5. Results :

5.1 Sound Level Accuracy

| UUT Nominal Value | Measured Value (dB) | Mfr's Spec. (dB) | Uncertainty of Measured Value (dB) |
|-------------------|---------------------|------------------|------------------------------------|
| 94 dB, 1 kHz | 94.1 | ± 0.3 | ± 0.2 |

5.2 Frequency Accuracy

| UUT Nominal Value (kHz) | Measured Value (kHz) | Mfr's Spec. | Uncertainty of Measured Value (Hz) |
|-------------------------|----------------------|-------------|------------------------------------|
| 1 | 1.001 | 1 kHz ± 1 % | ± 1 |

Remark : The uncertainties are for a confidence probability of not less than 95 %.

Note :

Only the original copy or the laboratory's certified true copy is valid.

The values given in this Certificate only relate to the values measured at the time of the test and any uncertainties quoted will not include allowance for the equipment long term drift, variations with environment changes, vibration and shock during transportation, overloading, mis-handling, or the capability of any other laboratory to repeat the measurement. Sun Creation Engineering Limited shall not be liable for any loss or damage resulting from the use of the equipment.



REPORT OF EQUIPMENT PERFORMANCE CHECK/CALIBRATION

| | | | |
|-----------------|--|-----------------------|---------------|
| CONTACT: | MR BEN TAM | WORK ORDER: | HK1818150 |
| CLIENT: | ACTION UNITED ENVIRONMENT SERVICES AND CONSULTING | SUB- BATCH: | 0 |
| ADDRESS: | RM A 20/F., GOLD KING IND BLDG, NO. 35- 41 TAI LIN PAI ROAD, KWAI CHUNG, N.T., HONG KONG. | LABORATORY: | HONG KONG |
| | | DATE RECEIVED: | 23- Feb- 2018 |
| | | DATE OF ISSUE: | 02- Mar- 2018 |

COMMENTS

The performance of the equipment stated in this report is checked with independent reference material and results compared against a calibrated secondary source.

The "Tolerance Limit" quoted is the acceptance criteria applicable for similar equipment used by the ALS Hong Kong laboratory or quoted from relevant international standards.

The "Next Calibration Date" is recommended according to best practice principals as practised by the ALS Hong Kong laboratory or quoted from relevant international standards.

| | |
|----------------------|----------------------------------|
| Scope of Test: | Dissolved Oxygen and Temperature |
| Equipment Type: | Dissolved Oxygen Meter |
| Brand Name: | YSI |
| Model No.: | 550A |
| Serial No.: | 16A104433 |
| Equipment No.: | -- |
| Date of Calibration: | 27 February, 2018 |

NOTES

This is the Final Report and supersedes any preliminary report with this batch number.
Results apply to sample(s) as submitted. All pages of this report have been checked and approved for release.


Mr Chan Siu Ming, Vice
Manager - Inorganics

REPORT OF EQUIPMENT PERFORMANCE CHECK/CALIBRATION



Work Order: HK1818150
Sub- Batch: 0
Date of Issue: 02- Mar- 2018
Client: ACTION UNITED ENVIRONMENT SERVICES AND CONSULTING

Equipment Type: Dissolved Oxygen Meter
Brand Name: YSI
Model No.: 550A
Serial No.: 16A104433
Equipment No.: --
Date of Calibration: 27 February, 2018

Date of next Calibration: 27 May, 2018

Parameters:

Dissolved Oxygen Method Ref: APHA (21st edition), 4500O: G

| Expected Reading (mg/L) | Displayed Reading (mg/L) | Tolerance (mg/L) |
|-------------------------|--------------------------|------------------|
| 2.42 | 2.37 | - 0.05 |
| 5.55 | 5.47 | - 0.08 |
| 8.58 | 8.41 | - 0.17 |
| Tolerance Limit (mg/L) | | ± 0.20 |

Temperature

Method Ref: Section 6 of International Accreditation New Zealand Technical Guide No. 3 Second edition March 2008: Working Thermometer Calibration Procedure.

| Expected Reading (°C) | Displayed Reading (°C) | Tolerance (°C) |
|-----------------------|------------------------|----------------|
| 10.5 | 10.8 | + 0.3 |
| 21.5 | 21.3 | - 0.2 |
| 39.0 | 38.8 | - 0.2 |
| Tolerance Limit (°C) | | ± 2.0 |

Remark: "Displayed Reading" presents the figures shown on item under calibration / checking regardless of equipment precision or significant figures.


 Mr Chan Siu Ming, Vice
 Manager - Inorganics



REPORT OF EQUIPMENT PERFORMANCE CHECK/CALIBRATION

| | | | |
|-----------------|---|-----------------------|---------------|
| CONTACT: | MR BEN TAM | WORK ORDER: | HK1818146 |
| CLIENT: | ACTION UNITED ENVIRONMENT SERVICES AND CONSULTING | SUB- BATCH: | 0 |
| ADDRESS: | RM A 20/F., GOLD KING IND BLDG, NO. 35- 41 TAI LIN PAI ROAD, KWAI CHUNG, N.T., HONG KONG | LABORATORY: | HONG KONG |
| | | DATE RECEIVED: | 23- Feb- 2018 |
| | | DATE OF ISSUE: | 02- Mar- 2018 |

COMMENTS

The performance of the equipment stated in this report is checked with independent reference material and results compared against a calibrated secondary source.
The "Tolerance Limit" quoted is the acceptance criteria applicable for similar equipment used by the ALS Hong Kong laboratory or quoted from relevant international standards.
The "Next Calibration Date" is recommended according to best practice principals as practised by the ALS Hong Kong laboratory or quoted from relevant international standards.

Scope of Test: Turbidity
Equipment Type: Turbidimeter
Brand Name: HACH
Model No.: 2100Q
Serial No.: 12060C018266
Equipment No.: --
Date of Calibration: 27 February, 2018

NOTES

This is the Final Report and supersedes any preliminary report with this batch number.
Results apply to sample(s) as submitted. All pages of this report have been checked and approved for release.

Mr Chan Siu Ming, Vico
Manager - Inorganics

REPORT OF EQUIPMENT PERFORMANCE CHECK/CALIBRATION



Work Order: HK1818146
Sub- batch: 0
Date of Issue: 02- Mar- 2018
Client: ACTION UNITED ENVIRONMENT SERVICES AND CONSULTING

Equipment Type: Turbidimeter
Brand Name: HACH
Model No.: 2100Q
Serial No.: 12060C018266
Equipment No.: --
Date of Calibration: 27 February, 2018

Date of next Calibration: 27 May, 2018

Parameters:

Turbidity

Method Ref: APHA 21st Ed. 2130B

| Expected Reading (NTU) | Displayed Reading (NTU) | Tolerance (%) |
|------------------------|-------------------------|---------------|
| 0 | 0.32 | -- |
| 4 | 4.28 | +7.0 |
| 40 | 38 | -5.0 |
| 80 | 84 | +5.0 |
| 400 | 377 | -5.8 |
| 800 | 751 | -6.1 |
| | Tolerance Limit (%) | ±10.0 |

Remark: "Displayed Reading" presents the figures shown on item under calibration / checking regardless of equipment precision or significant figures.

A handwritten signature in black ink, appearing to read 'Chan Siu Ming'.

Mr Chan Siu Ming, Vice
Manager - Inorganics



REPORT OF EQUIPMENT PERFORMANCE CHECK/CALIBRATION

| | | | |
|-----------------|---|-----------------------|---------------|
| CONTACT: | MR BEN TAM | WORK ORDER: | HK1818147 |
| CLIENT: | ACTION UNITED ENVIRONMENT SERVICES AND CONSULTING | SUB- BATCH: | 0 |
| ADDRESS: | RM A 20/F., GOLDEN KING IND BLDG, NO. 35- 41 TAI LIN PAI ROAD, KWAI CHUNG, N.T., HONG KONG | LABORATORY: | HONG KONG |
| | | DATE RECEIVED: | 23- Feb- 2018 |
| | | DATE OF ISSUE: | 02- Mar- 2018 |

COMMENTS

The performance of the equipment stated in this report is checked with independent reference material and results compared against a calibrated secondary source.
The "Tolerance Limit" quoted is the acceptance criteria applicable for similar equipment used by the ALS Hong Kong laboratory or quoted from relevant international standards.
The "Next Calibration Date" is recommended according to best practice principals as practised by the ALS Hong Kong laboratory or quoted from relevant international standards.

Scope of Test: pH
Description: pH Meter
Brand Name: AZ
Model No.: 8685
Serial No.: 1141943
Equipment No.: --
Date of Calibration: 27 February, 2018

NOTES

This is the Final Report and supersedes any preliminary report with this batch number.
Results apply to sample(s) as submitted. All pages of this report have been checked and approved for release.

Mr Chan Siu Ming, Vice
Manager - Inorganics

REPORT OF EQUIPMENT PERFORMANCE CHECK/CALIBRATION



Work Order: HK1818147
Sub- batch: 0
Date of Issue: 02- Mar- 2018
Client: ACTION UNITED ENVIRONMENT SERVICES AND CONSULTING

Description: pH Meter
Brand Name: AZ
Model No.: 8685
Serial No.: 1141943
Equipment No.: --

Date of Calibration: 27 February, 2018 Date of next Calibration: 27 May, 2018

Parameters:

pH Value

Method Ref: APHA (21st edition), 4500H:B

| Expected Reading (pH Unit) | Displayed Reading (pH Unit) | Tolerance (pH unit) |
|----------------------------|-----------------------------|---------------------|
| 4.0 | 4.1 | +0.10 |
| 7.0 | 6.9 | -0.10 |
| 10.0 | 9.8 | -0.20 |
| | Tolerance Limit (pH Unit) | ±0.20 |

Temperature

Method Ref: Section 6 of International Accreditation New Zealand Technical Guide No. 3 Second edition March 2008: Working Thermometer Calibration Procedure.

| Expected Reading (°C) | Displayed Reading (°C) | Tolerance (°C) |
|-----------------------|------------------------|----------------|
| 11.0 | 11.5 | +0.5 |
| 21.0 | 21.0 | +0.0 |
| 39.0 | 38.0 | -1.0 |
| | Tolerance Limit (°C) | ±2.0 |

Remark: "Displayed Reading" presents the figures shown on item under calibration / checking regardless of equipment precision or significant figures.

Mr Chan Siu Ming, Vico
Manager - Inorganics



Hong Kong Accreditation Service
香港認可處

Certificate of Accreditation
認可證書

This is to certify that
特此證明

ALS TECHNICHEM (HK) PTY LIMITED

11/F., Chung Shun Knitting Centre, 1-3 Wing Yip Street, Kwai Chung, New Territories, Hong Kong
香港新界葵涌永業街1-3號忠信針織中心11樓

has been accepted by the HKAS Executive, on the recommendation of the Accreditation Advisory Board, as a
為香港認可處執行機關根據認可諮詢委員會建議而接受的

HOKLAS Accredited Laboratory
「香港實驗所認可計劃」認可實驗所

This laboratory meets the requirements of ISO / IEC 17025 : 2005 – General requirements for the competence of testing and calibration laboratories and it has been accredited for performing specific tests or calibrations as listed in the HOKLAS Directory of Accredited Laboratories within the test category of
此實驗所符合ISO / IEC 17025 : 2005 –《測試及校正實驗所能力的通用規定》所訂的要求，獲認可進行載於香港實驗所認可計劃《認可實驗所名冊》內下述測試類別中的指定
測試或校正工作

Environmental Testing
環境測試

This laboratory is accredited in accordance with the recognised International Standard ISO / IEC 17025 : 2005.
本實驗所乃根據公認的國際標準 ISO / IEC 17025 : 2005 獲得認可。


This accreditation demonstrates technical competence for a defined scope and the operation of a laboratory quality management system (see joint IAF-ILAC-ISO Communiqué).
這項認可資格演示在指定範疇所需的技術能力及實驗所質量管理體系的運作
(見國際認可論壇、國際實驗所認可合作組織及國際標準化組織的聯合公報)。

The common seal of the Hong Kong Accreditation Service is affixed hereto by the authority of the HKAS Executive
香港認可處根據認可處執行機關的權限在此蓋上通用印章

CHAN Sing Sing, Terence, Executive Administrator
執行幹事 陳成城
Issue Date : 5 May 2009
簽發日期：二零零九年五月五日

Registration Number : **HOKLAS 066**
註冊號碼：

Date of First Registration : 15 September 1995
首次註冊日期：一九九五年九月十五日

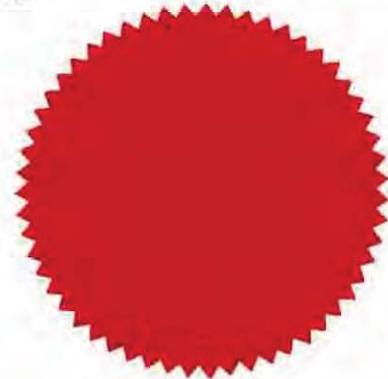

Appendix G

Event and Action Plan

Event and Action Plan for Air Quality

| Event | ET | IEC | ER | Action Contractor |
|---|---|---|--|---|
| Action Level | | | | |
| 1. Exceedance for one sample | 1. Identify source, investigate the causes of exceedance and propose remedial measures; 2. Inform IEC and ER; 3. Repeat measurement to confirm finding; 4. Increase monitoring frequency to daily. | 1. Check monitoring data submitted by ET; 2. Check Contractor's working method. | 1. Notify Contractor. | 1. Rectify any unacceptable practice; 2. Amend working methods if appropriate. |
| 2. Exceedance for two or more consecutive samples | 1. Identify source; 2. Inform IEC and ER; 3. Advise the ER on the effectiveness of the proposed remedial measures; 4. Repeat measurements to confirm findings; 5. Increase monitoring frequency to daily; 6. Discuss with IEC and Contractor on remedial actions required; 7. If exceedance continues, arrange meeting with IEC and ER; 8. If exceedance stops, cease additional monitoring. | 1. Check monitoring data submitted by ET; 2. Check Contractor's working method; 3. Discuss with ET and Contractor on possible remedial measures; 4. Advise the ET on the effectiveness of the proposed remedial measures; 5. Monitor the implementation of remedial measures. | 1. Confirm receipt of notification of failure in writing; 2. Notify Contractor; 3. Ensure remedial measures properly implemented. | 1. Submit proposals for remedial to ER within 3 working days of notification; 2. Implement the agreed proposals; 3. Amend proposal if appropriate. |
| Limit Level | | | | |
| 1. Exceedance for one sample | 1. Identify source, investigate the causes of exceedance and propose remedial measures; 2. Inform ER, Contractor and EPD; 3. Repeat measurement to confirm finding; 4. Increase monitoring frequency to daily; 5. Assess effectiveness of Contractor's remedial actions and keep IEC, EPD and ER informed of the results. | 1. Check monitoring data submitted by ET; 2. Check Contractor's working method; 3. Discuss with ET and Contractor on possible remedial measures; 4. Advise the ER on the effectiveness of the proposed remedial measures; 5. Monitor the implementation of remedial measures. | 1. Confirm receipt of notification of failure in writing; 2. Notify Contractor; 3. Ensure remedial measures properly implemented. | 1. Take immediate action to avoid further exceedance; 2. Submit proposals for remedial actions to IEC within 3 working days of notification; 3. Implement the agreed proposals; 4. Amend proposal if appropriate. |
| 2. Exceedance for two or more consecutive samples | 1. Notify IEC, ER, Contractor and EPD; 2. Identify source; 3. Repeat measurement to confirm findings; 4. Increase monitoring frequency to daily; 5. Carry out analysis of Contractor's working procedures to determine possible mitigation to be implemented; 6. Arrange meeting with IEC | 1. Check monitoring data submitted by ET; 2. Check Contractor's working method; 3. Discuss amongst ER, ET, and Contractor on the potential remedial actions; 4. Review Contractor's remedial actions whenever necessary to assure their effectiveness and advise | 1. Confirm receipt of notification of failure in writing; 2. Notify Contractor; 3. In consolidation with the IEC, agree with the Contractor on the remedial measures to be implemented; 4. Ensure remedial measures properly implemented; | 1. Take immediate action to avoid further exceedance; 2. Submit proposals for remedial actions to IEC within 3 working days of notification; 3. Implement the agreed proposals; 4. Resubmit proposals if problem still not |
| | and ER to discuss the remedial actions to be taken; 7. Assess effectiveness of Contractor's remedial actions and keep IEC, EPD and ER informed of the results; 8. If exceedance stops, cease additional monitoring. | the ER accordingly; 5. Monitor the implementation of remedial measures. | 5. If exceedance continues, consider what portion of the work is responsible and instruct the Contractor to stop that portion of work until the exceedance is abated. | under control; 5. Stop the relevant portion of works as determined by the ER until the exceedance is abated. |

Event and Action Plan for Construction Noise

| Event | | ET | IEC | ER | Action Contractor |
|--------------|---|---|--|---|-------------------|
| Action Level | 1. Notify ER, IEC and Contractor; 2. Carry out investigation; 3. Report the results of investigation to the IEC, ER and Contractor; 4. Discuss with the IEC and Contractor on remedial measures required; 5. Increase monitoring frequency to check mitigation effectiveness. | 1. Review the investigation results submitted by the ET; 2. Review the proposed remedial measures by the Contractor and advise the ER accordingly; 3. Advise the ER on the effectiveness of the proposed remedial measures. | 1. Confirm receipt of notification of failure in writing; 2. Notify Contractor; 3. In consolidation with the IEC, agree with the Contractor on the remedial measures to be implemented; 4. Supervise the implementation of remedial measures. | 1. Submit noise mitigation proposals to IEC and ER; 2. Implement noise mitigation proposals. | |
| Limit Level | 1. Inform IEC, ER, Contractor and EPD; 2. Repeat measurements to confirm findings; 3. Increase monitoring frequency; 4. Identify source and investigate the cause of exceedance; 5. Carry out analysis of Contractor's working procedures; 6. Discuss with the IEC, Contractor and ER on remedial measures required; 7. Assess effectiveness of Contractor's remedial actions and keep IEC, EPD and ER informed of the results; 8. If exceedance stops, cease additional monitoring. | 1. Discuss amongst ER, ET, and Contractor on the potential remedial actions; 2. Review Contractor's remedial actions whenever necessary to assure their effectiveness and advise the ER accordingly. | 1. Confirm receipt of notification of failure in writing; 2. Notify Contractor; 3. In consolidation with the IEC, agree with the Contractor on the remedial measures to be implemented; 4. Supervise the implementation of remedial measures; 5. If exceedance continues, consider stopping the Contractor to continue working on that portion of work which causes the exceedance until the exceedance is abated. | 1. Take immediate action to avoid further exceedance; 2. Submit proposals for remedial actions to IEC and ER within 3 working days of notification; 3. Implement the agreed proposals; 4. Submit further proposal if problem still not under control; 5. Stop the relevant portion of works as instructed by the ER until the exceedance is abated. | |

Event and Action Plan for Water Quality

| EVENT | | | | ACTION |
|--|---|--|--|---|
| | ET | IEC | ER | CONTRACTOR |
| Action level being exceeded by one sampling day | <ol style="list-style-type: none"> Repeat in-situ measurement to confirm findings; Identify reasons for non-compliance and sources of impact; Inform IEC and Contractor; Check monitoring data, all plant, equipment and Contractor's working methods; Discuss mitigation measures with IEC and Contractor; Repeat measurement on next day of exceedance. | <ol style="list-style-type: none"> Discuss with ET and Contractor on the mitigation measures; Review proposals on mitigation measures submitted by Contractor and advise the ER accordingly; Assess the effectiveness of the implemented mitigation measures | <ol style="list-style-type: none"> Discuss with IEC on the proposed mitigation measures; Make agreement on the mitigation measures to be implemented; Assess the effectiveness of the implemented mitigation measures | <ol style="list-style-type: none"> Inform the ER and confirm notification of the non-compliance in writing; Rectify unacceptable practice; Check all plant and equipment; Consider changes of working methods; Discuss with ET and IEC and propose mitigation measures to IEC and ER; Implement the agreed mitigation measures. |
| Action Level being exceeded by more than two consecutive sampling days | <ol style="list-style-type: none"> Repeat in-situ measurement to confirm findings; Identify reasons for non-compliance and sources of impact; Inform IEC and Contractor; Check monitoring data, all plant, equipment and Contractor's working methods; Discuss mitigation measures with IEC and Contractor; Ensure mitigation measures are implemented; Prepare to increase the monitoring frequency to daily; Repeat measurement on next day of exceedance. | <ol style="list-style-type: none"> Discuss with ET and Contractor on the mitigation measures; Review proposals on mitigation measures submitted by Contractor and advise the ER accordingly; Assess the effectiveness of the implemented mitigation measures | <ol style="list-style-type: none"> Discuss with IEC on the proposed mitigation measures; Make agreement on the mitigation measures to be implemented; Assess the effectiveness of the implemented mitigation measures | <ol style="list-style-type: none"> Inform the ER and confirm notification of the non-compliance in writing; Rectify unacceptable practice; Check all plant and equipment; Consider changes of working methods; Discuss with ET and IEC and propose mitigation measures to IEC and ER within 2 working days; Implement the agreed mitigation measures. |
| Limit Level being exceeded by one sampling day | <ol style="list-style-type: none"> Repeat in-situ measurement to confirm findings; Identify reasons for non-compliance and sources of impact; Inform IEC, Contractor and EPD; Check monitoring data, all plant, equipment and Contractor's working methods; Discuss mitigation measures with IEC, ER and Contractor; Ensure mitigation measures are implemented; Increase the monitoring frequency to daily until no exceedance of Limit Level. | <ol style="list-style-type: none"> Discuss with ET and Contractor on the mitigation measures; Review proposals on mitigation measures submitted by Contractor and advise the ER accordingly; Assess the effectiveness of the implemented mitigation measures | <ol style="list-style-type: none"> Discuss with IEC, ET and Contractor on the proposed mitigation measures; Request Contractor to critically review the working methods; Make agreement on the mitigation measures to be implemented; Assess the effectiveness of the implemented mitigation measures | <ol style="list-style-type: none"> Inform the ER and confirm notification of the non-compliance in writing; Rectify unacceptable practice; Check all plant and equipment; Consider changes of working methods; Discuss with ET, IEC and ER and propose mitigation measures to IEC and ER within 3 working days; Implement the agreed mitigation measures. |
| Limit Level being exceeded by more than one consecutive sampling days | <ol style="list-style-type: none"> Repeat in-situ measurement to confirm findings; Identify reasons for non-compliance and sources of impact; Inform IEC, Contractor and EPD; Check monitoring data, all plant, equipment and Contractor's working methods; Discuss mitigation measures with IEC, ER and Contractor; Ensure mitigation measures are implemented; Increase the monitoring frequency to daily until no exceedance of Limit Level for two consecutive days. | <ol style="list-style-type: none"> Discuss with ET and Contractor on the mitigation measures; Review proposals on mitigation measures submitted by Contractor and advise the ER accordingly; Assess the effectiveness of the implemented mitigation measures. | <ol style="list-style-type: none"> Discuss with IEC, ET and Contractor on the proposed mitigation measures; Request Contractor to critically review the working methods; Make agreement on the mitigation measures to be implemented; Assess the effectiveness of the implemented mitigation measures; Consider and instruct, if necessary, the Contractor to slow down or to stop all or part of the construction activities until no exceedance of Limit Level. | <ol style="list-style-type: none"> Inform the ER and confirm notification of the non-compliance in writing; Rectify unacceptable practice; Check all plant and equipment; Consider changes of working methods; Discuss with ET, IEC and ER and propose mitigation measures to IEC and ER within 3 working days; Implement the agreed mitigation measures; As directed by the ER, to slow down or to stop all or part of the construction activities. |

Appendix H

Impact Monitoring Schedule

Impact Monitoring Schedule for Reporting Period – March 2018

| Date | | Dust Monitoring | | Noise Monitoring | Water Quality |
|------|-----------|----------------------------|----------------------------|----------------------------|--|
| | | 1-hour TSP | 24-hour TSP | | |
| Thu | 1-Mar-18 | | AM4b, AM5, AM6, AM7b & AM8 | | All Water Quality Monitoring Locations |
| Fri | 2-Mar-18 | | | | |
| Sat | 3-Mar-18 | AM4b, AM5, AM6, AM7b & AM8 | | | All Water Quality Monitoring Locations |
| Sun | 4-Mar-18 | | | | |
| Mon | 5-Mar-18 | AM1b, AM2, AM3 & AM9b | | NM1, NM2a, NM8, NM9 & NM10 | All Water Quality Monitoring Locations |
| Tue | 6-Mar-18 | | AM1b, AM2, AM3 & AM9b | | |
| Wed | 7-Mar-18 | | AM4b, AM5, AM6, AM7b & AM8 | | All Water Quality Monitoring Locations |
| Thu | 8-Mar-18 | | | | |
| Fri | 9-Mar-18 | AM4b, AM5, AM6, AM7b & AM8 | | NM3, NM4, NM5, NM6 & NM7 | All Water Quality Monitoring Locations |
| Sat | 10-Mar-18 | AM1b, AM2, AM3 & AM9b | | | |
| Sun | 11-Mar-18 | | | | |
| Mon | 12-Mar-18 | | AM1b, AM2, AM3 & AM9b | | All Water Quality Monitoring Locations |
| Tue | 13-Mar-18 | | AM4b, AM5, AM6, AM7b & AM8 | | |
| Wed | 14-Mar-18 | | | | All Water Quality Monitoring Locations |
| Thu | 15-Mar-18 | AM4b, AM5, AM6, AM7b & AM8 | | NM3, NM4, NM5, NM6 & NM7 | |
| Fri | 16-Mar-18 | AM1b, AM2, AM3 & AM9b | | NM1, NM2a, NM8, NM9 & NM10 | All Water Quality Monitoring Locations |
| Sat | 17-Mar-18 | | AM1b, AM2, AM3 & AM9b | | |
| Sun | 18-Mar-18 | | | | |
| Mon | 19-Mar-18 | | AM4b, AM5, AM6, AM7b & AM8 | | All Water Quality Monitoring Locations |
| Tue | 20-Mar-18 | | | | |
| Wed | 21-Mar-18 | AM4b, AM5, AM6, AM7b & AM8 | | NM3, NM4, NM5, NM6 & NM7 | All Water Quality Monitoring Locations |
| Thu | 22-Mar-18 | AM1b, AM2, AM3 & AM9b | | NM1, NM2a, NM8, NM9 & NM10 | |
| Fri | 23-Mar-18 | | AM1b, AM2, AM3 & AM9b | | All Water Quality Monitoring Locations |
| Sat | 24-Mar-18 | | AM4b, AM5, AM6, AM7b & AM8 | | |
| Sun | 25-Mar-18 | | | | |
| Mon | 26-Mar-18 | AM4b, AM5, AM6, AM7b & AM8 | | NM3, NM4, NM5, NM6 & NM7 | |
| Tue | 27-Mar-18 | | | | All Water Quality Monitoring Locations |
| Wed | 28-Mar-18 | AM1b, AM2, AM3 & AM9b | | NM1, NM2a, NM8, NM9 & NM10 | |
| Thu | 29-Mar-18 | AM4b, AM5, AM6, AM7b & AM8 | AM1b, AM2, AM3 & AM9b | | All Water Quality Monitoring Locations |
| Fri | 30-Mar-18 | | AM4b, AM5, AM6, AM7b & AM8 | | |
| Sat | 31-Mar-18 | | | | All Water Quality Monitoring Locations |

| | |
|--|--------------------------|
| | Monitoring Day |
| | Sunday or Public Holiday |

Impact Monitoring Schedule for next Reporting Period – April 2018

| Date | | Dust Monitoring | | Noise Monitoring | Water Quality |
|------|-----------|----------------------------|----------------------------|----------------------------|--|
| | | 1-hour TSP | 24-hour TSP | | |
| Sun | 1-Apr-18 | | | | |
| Mon | 2-Apr-18 | | | | |
| Tue | 3-Apr-18 | AM1b, AM2, AM3 & AM9b | | NM1, NM2a, NM8, NM9 & NM10 | All Water Quality Monitoring Locations |
| Wed | 4-Apr-18 | AM4b, AM5, AM6, AM7b & AM8 | AM1b, AM2, AM3 & AM9b | NM3, NM4, NM5, NM6 & NM7 | |
| Thu | 5-Apr-18 | | AM4b, AM5, AM6, AM7b & AM8 | | All Water Quality Monitoring Locations |
| Fri | 6-Apr-18 | | | | |
| Sat | 7-Apr-18 | | | | All Water Quality Monitoring Locations |
| Sun | 8-Apr-18 | | | | |
| Mon | 9-Apr-18 | AM1b, AM2, AM3 & AM9b | | NM1, NM2a, NM8, NM9 & NM10 | All Water Quality Monitoring Locations |
| Tue | 10-Apr-18 | AM4b, AM5, AM6, AM7b & AM8 | AM1b, AM2, AM3 & AM9b | NM3, NM4, NM5, NM6 & NM7 | |
| Wed | 11-Apr-18 | | AM4b, AM5, AM6, AM7b & AM8 | | All Water Quality Monitoring Locations |
| Thu | 12-Apr-18 | | | | |
| Fri | 13-Apr-18 | | | | All Water Quality Monitoring Locations |
| Sat | 14-Apr-18 | AM1b, AM2, AM3 & AM9b | | | |
| Sun | 15-Apr-18 | | | | |
| Mon | 16-Apr-18 | AM4b, AM5, AM6, AM7b & AM8 | AM1b, AM2, AM3 & AM9b | NM3, NM4, NM5, NM6 & NM7 | All Water Quality Monitoring Locations |
| Tue | 17-Apr-18 | | AM4b, AM5, AM6, AM7b & AM8 | | |
| Wed | 18-Apr-18 | | | | All Water Quality Monitoring Locations |
| Thu | 19-Apr-18 | | | | |
| Fri | 20-Apr-18 | AM1b, AM2, AM3 & AM9b | | NM1, NM2a, NM8, NM9 & NM10 | All Water Quality Monitoring Locations |
| Sat | 21-Apr-18 | AM4b, AM5, AM6, AM7b & AM8 | AM1b, AM2, AM3 & AM9b | | |
| Sun | 22-Apr-18 | | | | |
| Mon | 23-Apr-18 | | AM4b, AM5, AM6, AM7b & AM8 | | All Water Quality Monitoring Locations |
| Tue | 24-Apr-18 | | | | |
| Wed | 25-Apr-18 | | | | All Water Quality Monitoring Locations |
| Thu | 26-Apr-18 | AM1b, AM2, AM3 & AM9b | | NM1, NM2a, NM8, NM9 & NM10 | |
| Fri | 27-Apr-18 | AM4b, AM5, AM6, AM7b & AM8 | AM1b, AM2, AM3 & AM9b | NM3, NM4, NM5, NM6 & NM7 | All Water Quality Monitoring Locations |
| Sat | 28-Apr-18 | | AM4b, AM5, AM6, AM7b & AM8 | | |
| Sun | 29-Apr-18 | | | | |
| Mon | 30-Apr-18 | | | | All Water Quality Monitoring Locations |

| | |
|--|--------------------------|
| | Monitoring Day |
| | Sunday or Public Holiday |

Appendix I

Database of Monitoring Result

24-hour TSP Monitoring Data

| DATE | SAMPLE NUMBER | ELAPSED TIME | | | CHART READING | | | AVG TEMP (°C) | AVG AIR PRESS (hPa) | STANDARD FLOW RATE (m ³ /min) | AIR VOLUME (std m ³) | FILTER WEIGHT (g) | | DUST WEIGHT COLLECTED (g) | 24-HR TSP (µg/m ³) |
|--|---------------|--------------|----------|---------|---------------|-----|------|---------------|---------------------|--|----------------------------------|-------------------|--------|---------------------------|--------------------------------|
| | | INITIAL | FINAL | (min) | MIN | MAX | AVG | | | | | INITIAL | FINAL | | |
| AM1b – Open Area, Tsung Yuen Ha Village | | | | | | | | | | | | | | | |
| 6-Mar-18 | 22351 | 14319.47 | 14343.66 | 1451.40 | 38 | 38 | 38.0 | 19.8 | 1017.2 | 1.29 | 1873 | 2.6611 | 2.8019 | 0.1408 | 75 |
| 12-Mar-18 | 22321 | 14343.66 | 14367.85 | 1451.40 | 38 | 38 | 38.0 | 19.6 | 1019 | 1.29 | 1875 | 2.6768 | 2.8114 | 0.1346 | 72 |
| 17-Mar-18 | 22305 | 14367.85 | 14392.00 | 1449.00 | 38 | 38 | 38.0 | 19.8 | 1015 | 1.29 | 1868 | 2.6782 | 2.8050 | 0.1268 | 68 |
| 23-Mar-18 | 22418 | 14392.00 | 14416.17 | 1450.20 | 38 | 38 | 38.0 | 20.5 | 1018.4 | 1.29 | 1870 | 2.6594 | 2.7887 | 0.1293 | 69 |
| 29-Mar-18 | 22370 | 14416.17 | 14440.28 | 1446.60 | 37 | 37 | 37.0 | 22.9 | 1014.3 | 1.25 | 1807 | 2.6788 | 2.8003 | 0.1215 | 67 |
| AM2 - Village House near Lin Ma Hang Road | | | | | | | | | | | | | | | |
| 6-Mar-18 | 22350 | 9806.27 | 9830.07 | 1428.00 | 46 | 46 | 46.0 | 19.8 | 1017.2 | 1.44 | 2058 | 2.6548 | 2.9579 | 0.3031 | 147 |
| 12-Mar-18 | 22320 | 9830.07 | 9853.85 | 1426.80 | 48 | 48 | 48.0 | 19.6 | 1019 | 1.51 | 2153 | 2.6781 | 2.9846 | 0.3065 | 142 |
| 17-Mar-18 | 22304 | 9853.85 | 9877.60 | 1425.00 | 44 | 44 | 44.0 | 19.8 | 1015 | 1.37 | 1957 | 2.6635 | 2.9072 | 0.2437 | 125 |
| 23-Mar-18 | 22234 | 9877.60 | 9901.38 | 1426.80 | 44 | 44 | 44.0 | 20.5 | 1018.4 | 1.37 | 1961 | 2.7015 | 2.9818 | 0.2803 | 143 |
| 29-Mar-18 | 22371 | 9901.38 | 9925.18 | 1428.00 | 44 | 44 | 44.0 | 22.9 | 1014.3 | 1.37 | 1950 | 2.6802 | 2.9604 | 0.2802 | 144 |
| AM3 - Ta Kwu Ling Fire Service Station of Ta Kwu Ling Village | | | | | | | | | | | | | | | |
| 6-Mar-18 | 22349 | 10941.33 | 10965.33 | 1440.00 | 36 | 36 | 36.0 | 19.8 | 1017.2 | 1.09 | 1564 | 2.6546 | 2.7418 | 0.0872 | 56 |
| 12-Mar-18 | 22319 | 10965.33 | 10989.34 | 1440.60 | 30 | 30 | 30.0 | 19.6 | 1019 | 0.88 | 1265 | 2.6737 | 2.7607 | 0.0870 | 69 |
| 17-Mar-18 | 22303 | 10989.34 | 11013.35 | 1440.60 | 36 | 36 | 36.0 | 19.8 | 1015 | 1.08 | 1563 | 2.6732 | 2.7597 | 0.0865 | 55 |
| 23-Mar-18 | 22233 | 11013.35 | 11037.35 | 1440.00 | 35 | 35 | 35.0 | 20.5 | 1018.4 | 1.05 | 1513 | 2.6766 | 2.8282 | 0.1516 | 100 |
| 29-Mar-18 | 22372 | 11037.35 | 11061.36 | 1440.60 | 36 | 36 | 36.0 | 22.9 | 1014.3 | 1.08 | 1553 | 2.6734 | 2.7960 | 0.1226 | 79 |
| AM4b - House no. 10B1 Nga Yiu Ha Village | | | | | | | | | | | | | | | |
| 1-Mar-18 | 22353 | 12919.40 | 12943.40 | 1440.00 | 44 | 44 | 44.0 | 21.3 | 1012.5 | 1.16 | 1670 | 2.6657 | 2.7832 | 0.1175 | 70 |
| 7-Mar-18 | 22317 | 12943.40 | 12967.40 | 1440.00 | 44 | 44 | 44.0 | 19.1 | 1016.7 | 1.17 | 1680 | 2.6755 | 2.8302 | 0.1547 | 92 |
| 13-Mar-18 | 22300 | 12967.40 | 12991.41 | 1440.60 | 44 | 44 | 44.0 | 20.9 | 1016.7 | 1.16 | 1676 | 2.6692 | 2.7672 | 0.0980 | 58 |
| 19-Mar-18 | 22308 | 12991.41 | 13015.42 | 1440.60 | 44 | 44 | 44.0 | 22 | 1014.7 | 1.16 | 1670 | 2.6831 | 2.7913 | 0.1082 | 65 |
| 24-Mar-18 | 22429 | 13015.42 | 13039.43 | 1440.60 | 40 | 45 | 42.5 | 21.1 | 1018.9 | 1.12 | 1615 | 2.6660 | 2.8080 | 0.1420 | 88 |
| 30-Mar-18 | 22376 | 13039.43 | 13063.16 | 1423.80 | 45 | 45 | 45.0 | 23.5 | 1015.4 | 1.19 | 1687 | 2.6874 | 2.8103 | 0.1229 | 73 |
| AM5a - Ping Yeung Village House | | | | | | | | | | | | | | | |
| 1-Mar-18 | 22354 | 11741.56 | 11766.01 | 1467.00 | 32 | 32 | 32.0 | 21.3 | 1012.5 | 1.15 | 1694 | 2.6735 | 2.7546 | 0.0811 | 48 |
| 7-Mar-18 | 22316 | 11766.01 | 11790.33 | 1459.20 | 36 | 36 | 36.0 | 19.1 | 1016.7 | 1.29 | 1889 | 2.6875 | 2.8292 | 0.1417 | 75 |
| 13-Mar-18 | 22301 | 11790.33 | 11814.72 | 1463.40 | 40 | 40 | 40.0 | 20.9 | 1016.7 | 1.42 | 2083 | 2.6693 | 2.8262 | 0.1569 | 75 |
| 19-Mar-18 | 22307 | 11814.72 | 11839.16 | 1466.40 | 40 | 40 | 40.0 | 22 | 1014.7 | 1.42 | 2082 | 2.6854 | 2.7742 | 0.0888 | 43 |
| 24-Mar-18 | 22428 | 11839.16 | 11863.63 | 1468.20 | 36 | 36 | 36.0 | 21.1 | 1018.9 | 1.29 | 1896 | 2.6570 | 2.8450 | 0.1880 | 99 |
| 30-Mar-18 | 22396 | 11863.63 | 11888.11 | 1468.80 | 36 | 36 | 36.0 | 23.5 | 1015.4 | 1.28 | 1887 | 2.6564 | 2.7507 | 0.0943 | 50 |
| AM6 - Wo Keng Shan Village House | | | | | | | | | | | | | | | |
| 1-Mar-18 | 22345 | 9349.49 | 9373.49 | 1440.00 | 30 | 30 | 30.0 | 21.3 | 1012.5 | 1.00 | 1441 | 2.6748 | 2.8225 | 0.1477 | 103 |

| DATE | SAMPLE NUMBER | ELAPSED TIME | | | CHART READING | | | AVG TEMP (°C) | AVG AIR PRESS (hPa) | STANDARD FLOW RATE (m ³ /min) | AIR VOLUME (std m ³) | FILTER WEIGHT (g) | | DUST WEIGHT COLLECTED (g) | 24-HR TSP (µg/m ³) |
|--|---------------|--------------|----------|---------|---------------|-----|------|---------------|---------------------|--|----------------------------------|-------------------|--------|---------------------------|--------------------------------|
| | | INITIAL | FINAL | (min) | MIN | MAX | AVG | | | | | INITIAL | FINAL | | |
| 7-Mar-18 | 22315 | 9373.49 | 9397.49 | 1440.00 | 30 | 30 | 30.0 | 19.1 | 1016.7 | 1.00 | 1447 | 2.6879 | 2.7981 | 0.1102 | 76 |
| 13-Mar-18 | 22324 | 9397.49 | 9421.51 | 1441.20 | 30 | 30 | 30.0 | 20.9 | 1016.7 | 1.00 | 1445 | 2.6625 | 2.7823 | 0.1198 | 83 |
| 19-Mar-18 | 22308 | 9421.51 | 9445.51 | 1440.00 | 30 | 30 | 30.0 | 22.0 | 1014.7 | 1.00 | 1441 | 2.6875 | 2.8649 | 0.1774 | 123 |
| 24-Mar-18 | 22394 | 9445.51 | 9469.52 | 1440.60 | 30 | 30 | 30.0 | 21.1 | 1018.9 | 1.00 | 1445 | 2.6748 | 2.8464 | 0.1716 | 119 |
| 30-Mar-18 | 22377 | 9469.52 | 9493.52 | 1440.00 | 32 | 32 | 32.0 | 23.5 | 1015.4 | 1.05 | 1509 | 2.6679 | 2.8000 | 0.1321 | 88 |
| AM7b - Loi Tung Village House | | | | | | | | | | | | | | | |
| 1-Mar-18 | 22346 | 18396.42 | 18420.43 | 1440.60 | 40 | 40 | 40.0 | 21.3 | 1012.5 | 1.05 | 1518 | 2.6676 | 2.8072 | 0.1396 | 92 |
| 7-Mar-18 | 22352 | 18420.43 | 18444.43 | 1440.00 | 44 | 44 | 44.0 | 19.1 | 1016.7 | 1.20 | 1721 | 2.6556 | 2.8328 | 0.1772 | 103 |
| 13-Mar-18 | 22302 | 18444.43 | 18468.45 | 1441.20 | 46 | 46 | 46.0 | 20.9 | 1016.7 | 1.26 | 1813 | 2.6817 | 2.8397 | 0.1580 | 87 |
| 19-Mar-18 | 22368 | 18468.45 | 18492.44 | 1439.40 | 44 | 44 | 44.0 | 19.6 | 1014.9 | 1.19 | 1717 | 2.6708 | 2.8531 | 0.1823 | 106 |
| 24-Mar-18 | 21561 | 18492.44 | 18516.46 | 1441.20 | 43 | 43 | 43.0 | 21.1 | 1018.9 | 1.16 | 1670 | 2.8049 | 3.0572 | 0.2523 | 151 |
| 30-Mar-18 | 22374 | 18516.46 | 18540.46 | 1440.00 | 42 | 42 | 42.0 | 23.5 | 1015.4 | 1.12 | 1609 | 2.6612 | 2.8527 | 0.1915 | 119 |
| AM8 - Po Kat Tsai Village No. 4 | | | | | | | | | | | | | | | |
| 1-Mar-18 | 22347 | 12293.73 | 12317.73 | 1440.00 | 32 | 32 | 32.0 | 21.3 | 1012.5 | 1.09 | 1576 | 2.6761 | 2.7472 | 0.0711 | 45 |
| 7-Mar-18 | 22318 | 12317.73 | 12341.74 | 1440.60 | 26 | 26 | 26.0 | 19.1 | 1016.7 | 0.97 | 1401 | 2.6825 | 2.7157 | 0.0332 | 24 |
| 13-Mar-18 | 22323 | 12341.74 | 12365.75 | 1440.60 | 34 | 34 | 34.0 | 20.9 | 1016.7 | 1.14 | 1639 | 2.6811 | 2.7640 | 0.0829 | 51 |
| 19-Mar-18 | 22369 | 12365.75 | 12389.76 | 1440.60 | 36 | 36 | 36.0 | 19.6 | 1014.9 | 1.18 | 1701 | 2.6703 | 2.7702 | 0.0999 | 59 |
| 24-Mar-18 | 22383 | 12389.76 | 12413.77 | 1440.60 | 34 | 34 | 34.0 | 21.1 | 1018.9 | 1.14 | 1640 | 2.6629 | 2.7997 | 0.1368 | 83 |
| 30-Mar-18 | 22375 | 12413.77 | 12437.77 | 1440.00 | 32 | 32 | 32.0 | 23.5 | 1015.4 | 1.09 | 1573 | 2.6794 | 2.7709 | 0.0915 | 58 |
| AM9b - Nam Wa Po Village House No. 80 | | | | | | | | | | | | | | | |
| 6-Mar-18 | 22348 | 19696.53 | 19720.53 | 1440.00 | 36 | 36 | 36.0 | 19.8 | 1017.2 | 1.12 | 1615 | 2.6651 | 2.7565 | 0.0914 | 57 |
| 12-Mar-18 | 22322 | 19720.53 | 19744.54 | 1440.60 | 36 | 36 | 36.0 | 19.6 | 1019 | 1.12 | 1618 | 2.6726 | 2.7499 | 0.0773 | 48 |
| 17-Mar-18 | 22306 | 19744.54 | 19768.54 | 1440.00 | 30 | 32 | 31.0 | 19.8 | 1015 | 0.96 | 1387 | 2.6690 | 2.8267 | 0.1577 | 114 |
| 23-Mar-18 | 22355 | 19768.54 | 19792.54 | 1440.00 | 32 | 32 | 32.0 | 20.5 | 1018.4 | 0.99 | 1433 | 2.6667 | 2.8153 | 0.1486 | 104 |
| 29-Mar-18 | 22373 | 19792.54 | 19816.54 | 1440.00 | 34 | 34 | 34.0 | 22.9 | 1014.3 | 1.05 | 1514 | 2.6764 | 2.7965 | 0.1201 | 79 |

Construction Noise Monitoring Results, dB(A)

| Date | Start Time | 1 st Leq _{5min} | L10 | L90 | 2 nd Leq _{5min} | L10 | L90 | 3 rd Leq _{5min} | L10 | L90 | 4 th Leq _{5min} | L10 | L90 | 5 th Leq _{5min} | L10 | L90 | 6 th Leq _{5min} | L10 | L90 | Leq30 | façade correction |
|---|------------|-------------------------------------|------|------|-------------------------------------|------|------|-------------------------------------|------|------|-------------------------------------|------|------|-------------------------------------|------|------|-------------------------------------|------|------|-------|-------------------|
| NM1 - Tsung Yuen Ha Village House No. 63 | | | | | | | | | | | | | | | | | | | | | |
| 5-Mar-18 | 9:40 | 59.9 | 61.3 | 54.6 | 60.2 | 62.2 | 55.2 | 59.0 | 61.3 | 54.7 | 60.3 | 62.1 | 55.1 | 61.6 | 63.1 | 56.4 | 59.2 | 61.4 | 54.7 | 60 | NA |
| 16-Mar-18 | 9:33 | 59.0 | 61.0 | 55.6 | 59.3 | 61.9 | 55.7 | 58.4 | 60.6 | 55.3 | 59.1 | 61.9 | 55.7 | 64.8 | 69.1 | 58.3 | 58.4 | 60.6 | 55.4 | 61 | NA |
| 22-Mar-18 | 10:31 | 56.5 | 58.7 | 52.9 | 56.9 | 59.5 | 52.8 | 57.5 | 59.4 | 53.5 | 59.8 | 62.3 | 54.4 | 58.2 | 60.5 | 54.6 | 58.6 | 61.3 | 54.2 | 58 | NA |
| 28-Mar-18 | 10:08 | 45.7 | 48.6 | 37.8 | 47.5 | 51.1 | 40.0 | 48.7 | 52.0 | 36.9 | 52.9 | 57.8 | 36.7 | 50.5 | 54.7 | 40.9 | 55.6 | 52.8 | 40.9 | 51 | NA |
| NM2a - Village House near Lin Ma Hang Road | | | | | | | | | | | | | | | | | | | | | |
| 5-Mar-18 | 10:22 | 72.7 | 68.3 | 53.8 | 64.7 | 69.7 | 55.1 | 64.8 | 69.1 | 54.2 | 65.8 | 69.0 | 55.2 | 63.7 | 70.4 | 54.3 | 62.2 | 70.3 | 54.1 | 67 | 70 |
| 16-Mar-18 | 9:25 | 65.6 | 65.7 | 50.8 | 61.6 | 66.0 | 49.3 | 62.0 | 66.6 | 47.3 | 67.8 | 68.7 | 49.5 | 61.2 | 64.6 | 51.3 | 64.7 | 66.7 | 52.3 | 65 | 68 |
| 22-Mar-18 | 11:30 | 75.8 | 76.4 | 51.8 | 59.7 | 63.0 | 52.4 | 63.9 | 68.7 | 54.6 | 65.4 | 66.8 | 52.6 | 68.4 | 72.3 | 58.7 | 61.9 | 65.1 | 51.0 | 69 | 72 |
| 28-Mar-18 | 9:17 | 70.9 | 72.1 | 50.4 | 58.7 | 59.6 | 50.3 | 54.2 | 56.9 | 48.9 | 58.4 | 62.6 | 50.2 | 66.1 | 67.4 | 56.3 | 62.3 | 66.4 | 52.6 | 65 | 68 |
| NM3 - Ping Yeung Village House | | | | | | | | | | | | | | | | | | | | | |
| 9-Mar-18 | 9:32 | 61.9 | 64.8 | 54.2 | 60.4 | 63.4 | 54.1 | 59.9 | 63.8 | 52.7 | 60.6 | 64.9 | 53.1 | 59.9 | 63.2 | 53.7 | 60.2 | 64.4 | 54.4 | 61 | NA |
| 15-Mar-18 | 9:34 | 60.6 | 60.1 | 53.3 | 59.2 | 61.7 | 53.6 | 58.4 | 61.0 | 53.9 | 59.1 | 62.2 | 54.5 | 57.4 | 59.4 | 53.9 | 58.1 | 61.1 | 54.8 | 59 | NA |
| 20-Mar-18 | 9:11 | 54.8 | 58.6 | 50.1 | 56.4 | 59.1 | 50.6 | 54.8 | 58.7 | 49.5 | 54.3 | 57.2 | 49.4 | 55.2 | 59.7 | 48.8 | 55.6 | 60.3 | 50.1 | 55 | NA |
| 26-Mar-18 | 9:42 | 56.3 | 57.1 | 50.8 | 62.3 | 62.3 | 54.4 | 67.6 | 67.8 | 51.4 | 64.9 | 62.9 | 52.0 | 57.2 | 58.2 | 49.8 | 58.6 | 63.0 | 50.4 | 63 | NA |
| 29-Mar-18 | 13:08 | 54.8 | 60.2 | 49.6 | 55.3 | 59.7 | 49.1 | 54.5 | 58.5 | 50.2 | 53.6 | 57.2 | 50.3 | 54.2 | 59.8 | 49.6 | 54.5 | 60.7 | 50.5 | 55 | NA |
| NM4 - Wo Keng Shan Village House | | | | | | | | | | | | | | | | | | | | | |
| 9-Mar-18 | 10:08 | 67.4 | 68.3 | 52.3 | 66.4 | 67.0 | 52.6 | 68.0 | 70.1 | 52.7 | 62.2 | 61.6 | 48.5 | 60.6 | 60.5 | 48.9 | 63.2 | 62.7 | 50.0 | 65 | NA |
| 15-Mar-18 | 10:11 | 65.6 | 67.1 | 51.1 | 62.9 | 64.7 | 51.4 | 66.5 | 67.5 | 51.7 | 65.7 | 66.9 | 50.5 | 63.7 | 65.8 | 49.6 | 64.2 | 66.7 | 50.9 | 65 | NA |
| 20-Mar-18 | 13:33 | 61.7 | 64.4 | 54.8 | 64.3 | 66.6 | 53.2 | 63.9 | 66.3 | 54.2 | 63.1 | 65.4 | 54.3 | 62.2 | 67.6 | 55.9 | 64.8 | 68.2 | 56.9 | 63 | NA |
| 26-Mar-18 | 10:24 | 62.9 | 65.9 | 52.8 | 62.2 | 64.4 | 52.9 | 64.3 | 64.5 | 52.2 | 58.8 | 60.7 | 51.5 | 56.0 | 59.0 | 51.9 | 58.0 | 61.4 | 51.7 | 61 | NA |
| 29-Mar-18 | 11:21 | 61.6 | 64.8 | 54.9 | 62.2 | 64.7 | 53.8 | 62.5 | 65.9 | 53.8 | 62.8 | 66.9 | 52.1 | 61.7 | 64.8 | 53.6 | 62.2 | 66.5 | 54.1 | 62 | NA |
| NM5- Ping Yeung Village House | | | | | | | | | | | | | | | | | | | | | |
| 9-Mar-18 | 9:13 | 51.6 | 54.8 | 46.2 | 51.3 | 55.9 | 47.5 | 52.6 | 54.9 | 46.4 | 53.5 | 56.8 | 46.1 | 52.6 | 55.3 | 46.7 | 51.9 | 55.1 | 45.3 | 52 | NA |
| 15-Mar-18 | 10:40 | 57.6 | 60.9 | 50.2 | 60.0 | 64.1 | 49.4 | 53.3 | 54.4 | 48.3 | 62.1 | 55.6 | 48.9 | 52.9 | 55.5 | 48.0 | 52.3 | 54.7 | 46.2 | 58 | NA |
| 20-Mar-18 | 9:38 | 56.9 | 60.5 | 52.0 | 56.0 | 58.5 | 52.0 | 57.0 | 60.0 | 53.0 | 57.1 | 59.5 | 52.0 | 56.7 | 59.5 | 51.5 | 56.6 | 59.5 | 52.0 | 57 | NA |
| 26-Mar-18 | 9:39 | 51.9 | 53.4 | 47.4 | 52.5 | 53.8 | 47.8 | 49.8 | 51.7 | 45.7 | 50.9 | 53.2 | 45.8 | 51.2 | 53.6 | 47.8 | 50.2 | 52.9 | 45.7 | 51 | NA |
| 29-Mar-18 | 10:38 | 51.7 | 56.4 | 49.4 | 52.8 | 55.3 | 49.6 | 52.6 | 54.9 | 49.7 | 53.2 | 56.8 | 48.3 | 53.9 | 56.7 | 49.7 | 52.2 | 55.3 | 48.5 | 53 | NA |
| NM6 – Tai Tong Wu Village House 2 | | | | | | | | | | | | | | | | | | | | | |
| 9-Mar-18 | 10:08 | 56.5 | 61.7 | 52.4 | 56.8 | 60.3 | 52.9 | 55.3 | 59.7 | 51.8 | 56.1 | 62.5 | 51.8 | 55.3 | 60.4 | 51.9 | 58.6 | 59.2 | 52.3 | 57 | NA |
| 15-Mar-18 | 11:18 | 62.1 | 64.5 | 55.4 | 61.6 | 63.7 | 57.5 | 62.3 | 63.2 | 56.9 | 59.7 | 62.2 | 55.8 | 58.3 | 61.2 | 53.3 | 60.3 | 62.2 | 54.5 | 61 | NA |
| 20-Mar-18 | 10:37 | 62.7 | 61.0 | 51.5 | 53.5 | 54.5 | 51.0 | 63.2 | 62.0 | 53.0 | 55.4 | 56.0 | 52.0 | 53.4 | 55.0 | 50.5 | 65.3 | 67.0 | 51.0 | 61 | NA |

| Date | Start Time | 1 st Leq _{5min} | L10 | L90 | 2 nd Leq _{5min} | L10 | L90 | 3 rd Leq _{5min} | L10 | L90 | 4 th Leq _{5min} | L10 | L90 | 5 th Leq _{5min} | L10 | L90 | 6 th Leq _{5min} | L10 | L90 | Leq30 | façade correction |
|--|------------|--|------|------|--|------|------|--|------|------|--|------|------|--|------|------|--|------|------|-------|-------------------|
| 26-Mar-18 | 10:19 | 57.8 | 59.0 | 51.1 | 59.4 | 63.0 | 53.4 | 57.7 | 61.1 | 51.6 | 60.9 | 64.0 | 52.5 | 58.5 | 61.3 | 51.7 | 59.2 | 62.8 | 50.5 | 59 | NA |
| 29-Mar-18 | 10:01 | 56.6 | 60.8 | 52.3 | 57.9 | 61.4 | 53.6 | 56.4 | 60.9 | 54.3 | 55.8 | 61.9 | 49.2 | 56.6 | 62.5 | 50.3 | 57.6 | 62.4 | 51.8 | 57 | NA |
| NM7 – Po Kat Tsai Village | | | | | | | | | | | | | | | | | | | | | |
| 9-Mar-18 | 13:25 | 58.6 | 61.9 | 53.4 | 57.8 | 60.6 | 53.2 | 57.9 | 58.4 | 52.6 | 58.3 | 59.1 | 52.2 | 59.1 | 60.7 | 53.4 | 60.2 | 61.9 | 52.6 | 59 | NA |
| 15-Mar-18 | 11:11 | 58.8 | 60.4 | 55.4 | 59.6 | 60.6 | 55.8 | 59.5 | 62.9 | 55.9 | 65.6 | 65.4 | 54.4 | 60.8 | 61.6 | 54.0 | 56.2 | 58.9 | 54.2 | 61 | NA |
| 20-Mar-18 | 13:13 | 67.3 | 70.0 | 59.5 | 62.7 | 65.0 | 59.0 | 63.0 | 65.0 | 59.0 | 62.9 | 65.0 | 59.0 | 63.1 | 65.5 | 58.0 | 61.9 | 63.5 | 57.0 | 64 | NA |
| 26-Mar-18 | 13:34 | 60.6 | 61.7 | 54.4 | 56.8 | 58.6 | 54.7 | 67.7 | 68.5 | 56.8 | 68.6 | 71.6 | 54.9 | 61.2 | 59.5 | 52.4 | 63.2 | 62.4 | 54.0 | 65 | NA |
| 29-Mar-18 | 9:06 | 56.9 | 60.7 | 52.4 | 57.6 | 60.3 | 53.4 | 56.8 | 59.2 | 54.1 | 56.5 | 61.7 | 53.3 | 59.2 | 59.9 | 54.1 | 58.8 | 62.2 | 53.6 | 58 | NA |
| NM8 - Village House, Tong Hang | | | | | | | | | | | | | | | | | | | | | |
| 5-Mar-18 | 13:02 | 59.6 | 60 | 50.5 | 60 | 62.5 | 52.5 | 59.8 | 60 | 54.3 | 63.1 | 68.5 | 52 | 63.6 | 68 | 53 | 65.9 | 70 | 53 | 63 | NA |
| 16-Mar-18 | 11:02 | 63.6 | 68.4 | 51.1 | 61.9 | 65.8 | 49.4 | 62.1 | 66.4 | 50.5 | 60.7 | 66.8 | 50.8 | 58.5 | 65.7 | 49.9 | 61.1 | 67.5 | 50.5 | 62 | NA |
| 22-Mar-18 | 10:49 | 57.2 | 60.2 | 43.9 | 55.9 | 57.8 | 45.2 | 56.8 | 61.6 | 45.8 | 55.5 | 61.7 | 46.7 | 55 | 60.4 | 43.6 | 55.9 | 57.9 | 45.4 | 56 | NA |
| 28-Mar-18 | 9:16 | 59.3 | 61.2 | 52.3 | 58.2 | 62.3 | 51.1 | 59.3 | 62.1 | 56.3 | 56.3 | 60.3 | 48.3 | 56.3 | 58.7 | 47.3 | 61.2 | 65.4 | 51.2 | 59 | NA |
| NM9 - Village House, Kiu Tau Village | | | | | | | | | | | | | | | | | | | | | |
| 5-Mar-18 | 11:17 | 61.2 | 63.5 | 56.5 | 61.3 | 62.5 | 57.0 | 63.4 | 66.0 | 57.0 | 62.1 | 65.5 | 51.0 | 70.6 | 70.5 | 52.5 | 64.3 | 67.0 | 51.0 | 65 | NA |
| 16-Mar-18 | 10:21 | 62.1 | 63.2 | 58.2 | 62.6 | 63.7 | 58.7 | 63.8 | 64.6 | 59.1 | 61.2 | 63.6 | 58.1 | 62.1 | 64.3 | 59.2 | 63.0 | 65.3 | 60.3 | 63 | NA |
| 22-Mar-18 | 10:06 | 59.2 | 63.9 | 52.6 | 58.0 | 63.2 | 52.1 | 58.0 | 60.7 | 52.5 | 57.6 | 59.7 | 51.7 | 55.9 | 55.6 | 52.0 | 58.1 | 61.2 | 53.0 | 58 | NA |
| 28-Mar-18 | 10:09 | 61.3 | 64.3 | 53.4 | 62.4 | 63.4 | 53.6 | 58.4 | 60.4 | 51.3 | 58.3 | 62.3 | 48.6 | 57.1 | 61.4 | 50.9 | 63.2 | 65.1 | 51.1 | 61 | NA |
| NM10 - Nam Wa Po Village House No. 80 | | | | | | | | | | | | | | | | | | | | | |
| 5-Mar-18 | 10:21 | 65.1 | 67.0 | 61.0 | 61.6 | 63.0 | 60.0 | 61.6 | 63.0 | 59.5 | 65.9 | 68.5 | 55.5 | 71.0 | 72.0 | 62.5 | 65.4 | 68.5 | 57.5 | 66 | 69 |
| 16-Mar-18 | 9:34 | 61.7 | 63.4 | 59.2 | 64.6 | 66.7 | 61.1 | 63.6 | 65.2 | 60.4 | 62.0 | 64.4 | 59.1 | 63.1 | 65.2 | 60.4 | 64.7 | 65.6 | 60.0 | 63 | 66 |
| 22-Mar-18 | 9:19 | 56.7 | 58.7 | 54.2 | 56.6 | 58.5 | 54.2 | 55.8 | 57.2 | 54.1 | 56.3 | 58.1 | 54.5 | 56.0 | 57.7 | 53.8 | 56.0 | 58.2 | 53.2 | 56 | 59 |
| 28-Mar-18 | 11:28 | 58.4 | 59.3 | 52.3 | 57.2 | 60.3 | 55.3 | 57.6 | 58.3 | 52.2 | 59.3 | 61.1 | 51.3 | 55.2 | 58.1 | 53.2 | 59.2 | 60.2 | 51.4 | 58 | 61 |

Water Quality Monitoring Data for Contract 6 and SS C505

| Date: 1-Mar-18 | | | | | | | | | | | | | | |
|----------------|-------|-----------|-----------|------|-----------|------|--------|-------|-----------------|-----|-----|-----|----------|-----|
| Location | Time | Depth (m) | Temp (oC) | | DO (mg/L) | | DO (%) | | Turbidity (NTU) | | pH | | SS(mg/L) | |
| WM1-C | 10:00 | 0.15 | 20.5 | 20.5 | 13.84 | 13.9 | 153.4 | 153.5 | 8.0 | 8.1 | 7.5 | 7.5 | 4 | 3.5 |
| | | | 20.5 | | 13.86 | | 153.6 | | 8.2 | | 7.5 | | 3 | |
| WM1 | 9:50 | 0.15 | 19.6 | 19.6 | 7 | 7.0 | 76.4 | 76.3 | 7.9 | 7.9 | 7.7 | 7.7 | 7 | 7.0 |
| | | | 19.6 | | 6.99 | | 76.2 | | 7.9 | | 7.7 | | 7 | |

| Date: 3-Mar-18 | | | | | | | | | | | | | | |
|----------------|------|-----------|-----------|------|-----------|------|--------|-------|-----------------|-----|-----|-----|----------|------|
| Location | Time | Depth (m) | Temp (oC) | | DO (mg/L) | | DO (%) | | Turbidity (NTU) | | pH | | SS(mg/L) | |
| WM1-C | 8:57 | 0.21 | 22.1 | 22.1 | 13.54 | 13.5 | 155.2 | 154.2 | 7.4 | 7.4 | 7.4 | 7.4 | 7 | 6.5 |
| | | | 22.1 | | 13.4 | | 153.2 | | 7.3 | | 7.4 | | 6 | |
| WM1 | 8:45 | 0.20 | 22 | 22.0 | 5.78 | 5.8 | 65.4 | 65.4 | 9.1 | 9.2 | 7.3 | 7.3 | 14 | 14.0 |
| | | | 22 | | 5.8 | | 65.4 | | 9.2 | | 7.3 | | 14 | |

| Date: 5-Mar-18 | | | | | | | | | | | | | | |
|----------------|------|-----------|-----------|------|-----------|------|--------|-------|-----------------|------|-----|-----|----------|------|
| Location | Time | Depth (m) | Temp (oC) | | DO (mg/L) | | DO (%) | | Turbidity (NTU) | | pH | | SS(mg/L) | |
| WM1-C | 9:40 | 0.15 | 23.5 | 23.5 | 12.34 | 12.4 | 145.0 | 145.1 | 8.1 | 8.1 | 7.5 | 7.5 | 3 | 2.5 |
| | | | 23.5 | | 12.38 | | 145.2 | | 8.1 | | 7.5 | | 2 | |
| WM1 | 9:55 | 0.15 | 23.2 | 23.2 | 5.55 | 5.5 | 64.8 | 64.8 | 10.8 | 10.9 | 7.2 | 7.2 | 14 | 13.5 |
| | | | 23.2 | | 5.54 | | 64.7 | | 10.9 | | 7.2 | | 13 | |

| Date: 7-Mar-18 | | | | | | | | | | | | | | |
|----------------|------|-----------|-----------|------|-----------|------|--------|-------|-----------------|------|-----|-----|----------|------|
| Location | Time | Depth (m) | Temp (oC) | | DO (mg/L) | | DO (%) | | Turbidity (NTU) | | pH | | SS(mg/L) | |
| WM1-C | 9:55 | 0.15 | 22.8 | 22.8 | 11.73 | 11.7 | 133.1 | 132.6 | 9.1 | 9.2 | 7.9 | 7.9 | 3 | 2.5 |
| | | | 22.8 | | 11.62 | | 132.1 | | 9.2 | | 7.9 | | 2 | |
| WM1 | 9:45 | 0.15 | 21.1 | 21.1 | 6.32 | 6.3 | 70.9 | 70.8 | 13.5 | 14.2 | 7.7 | 7.7 | 17 | 16.0 |
| | | | 21.1 | | 6.28 | | 70.6 | | 14.8 | | 7.7 | | 15 | |

| Date: 9-Mar-18 | | | | | | | | | | | | | | |
|----------------|-------|-----------|-----------|------|-----------|------|--------|-------|-----------------|------|-----|-----|----------|------|
| Location | Time | Depth (m) | Temp (oC) | | DO (mg/L) | | DO (%) | | Turbidity (NTU) | | pH | | SS(mg/L) | |
| WM1-C | 10:00 | 0.15 | 13.5 | 13.5 | 12.82 | 12.7 | 121.8 | 121.2 | 8.6 | 8.5 | 7.3 | 7.3 | 3 | 3.0 |
| | | | 13.5 | | 12.63 | | 120.6 | | 8.4 | | 7.3 | | 3 | |
| WM1 | 9:50 | 0.15 | 13.7 | 13.7 | 8.84 | 8.8 | 84.8 | 84.6 | 27.6 | 28.3 | 7.2 | 7.2 | 21 | 21.0 |
| | | | 13.7 | | 8.77 | | 84.3 | | 28.9 | | 7.2 | | 21 | |

| Date: 12-Mar-18 | | | | | | | | | | | | | | |
|-----------------|------|-----------|-----------|------|-----------|------|--------|-------|-----------------|-----|-----|-----|----------|-----|
| Location | Time | Depth (m) | Temp (oC) | | DO (mg/L) | | DO (%) | | Turbidity (NTU) | | pH | | SS(mg/L) | |
| WM1-C | 9:40 | 0.15 | 19.2 | 19.2 | 10.19 | 10.2 | 111.9 | 112.0 | 5.9 | 5.9 | 7.5 | 7.5 | 4 | 4.0 |
| | | | 19.2 | | 10.19 | | 112.1 | | 5.8 | | 7.5 | | 4 | |
| WM1 | 9:50 | 0.18 | 22 | 22.0 | 5.66 | 5.7 | 63.6 | 63.8 | 4.9 | 5.3 | 7.1 | 7.1 | 4 | 4.0 |
| | | | 22 | | 5.7 | | 64.0 | | 5.7 | | 7.1 | | 4 | |

| Date | 14-Mar-18 | | | | | | | | | | | | | |
|----------|-----------|-----------|-----------|------|-----------|------|--------|-------|-----------------|------|-----|-----|----------|------|
| Location | Time | Depth (m) | Temp (oC) | | DO (mg/L) | | DO (%) | | Turbidity (NTU) | | pH | | SS(mg/L) | |
| WM1-C | 9:50 | 0.17 | 21.1 | 21.1 | 10.55 | 10.5 | 118.3 | 117.6 | 11.3 | 11.5 | 7.2 | 7.2 | 9 | 8.5 |
| | | | 21.1 | | 10.39 | | 116.9 | | 11.6 | | 7.2 | | 8 | |
| WM1 | 9:40 | 0.20 | 21.2 | 21.2 | 6.73 | 6.7 | 75.7 | 75.6 | 23.1 | 23.5 | 7 | 7.0 | 15 | 16.0 |
| | | | 21.2 | | 6.7 | | 75.4 | | 23.8 | | 7 | | 17 | |

| Date | 16-Mar-18 | | | | | | | | | | | | | |
|----------|-----------|-----------|-----------|------|-----------|-----|--------|-------|-----------------|------|-----|-----|----------|------|
| Location | Time | Depth (m) | Temp (oC) | | DO (mg/L) | | DO (%) | | Turbidity (NTU) | | pH | | SS(mg/L) | |
| WM1-C | 9:40 | 0.15 | 21.8 | 21.8 | 9.88 | 9.8 | 114.2 | 113.8 | 25.8 | 26.6 | 7.2 | 7.2 | 20 | 19.5 |
| | | | 21.8 | | 9.81 | | 113.4 | | 27.4 | | 7.2 | | 19 | |
| WM1 | 10:00 | 0.18 | 21.8 | 21.8 | 4.4 | 4.4 | 50.1 | 50.0 | 26.1 | 26.3 | 7.2 | 7.2 | 14 | 13.5 |
| | | | 21.8 | | 4.37 | | 49.9 | | 26.4 | | 7.2 | | 13 | |

| Date | 19-Mar-18 | | | | | | | | | | | | | |
|----------|-----------|-----------|-----------|------|-----------|-----|--------|-------|-----------------|------|------|-----|----------|------|
| Location | Time | Depth (m) | Temp (oC) | | DO (mg/L) | | DO (%) | | Turbidity (NTU) | | pH | | SS(mg/L) | |
| WM1-C | 10:00 | 0.19 | 24.4 | 24.4 | 8.62 | 8.6 | 103.2 | 103.2 | 18.6 | 18.7 | 7.73 | 7.7 | 18 | 16.0 |
| | | | 24.4 | | 8.64 | | 103.1 | | 18.7 | | 7.74 | | 14 | |
| WM1 | 10:38 | 0.15 | 24 | 24.0 | 7.65 | 7.6 | 90.8 | 90.8 | 8.7 | 8.7 | 8.06 | 8.1 | 14 | 17.5 |
| | | | 24 | | 7.64 | | 90.8 | | 8.6 | | 8.07 | | 21 | |

| Date | 21-Mar-18 | | | | | | | | | | | | | |
|----------|-----------|-----------|-----------|------|-----------|-----|--------|-------|-----------------|------|------|-----|----------|------|
| Location | Time | Depth (m) | Temp (oC) | | DO (mg/L) | | DO (%) | | Turbidity (NTU) | | pH | | SS(mg/L) | |
| WM1-C | 10:38 | 0.21 | 21.5 | 21.5 | 8.93 | 8.9 | 101.1 | 101.2 | 14.5 | 13.9 | 7.59 | 7.6 | 14 | 15.0 |
| | | | 21.5 | | 8.92 | | 101.2 | | 13.2 | | 7.58 | | 16 | |
| WM1 | 11:12 | 0.19 | 21.2 | 21.2 | 8.28 | 8.4 | 93.6 | 94.8 | 26.2 | 25.5 | 7.04 | 7.0 | 16 | 17.0 |
| | | | 21.2 | | 8.52 | | 95.9 | | 24.8 | | 7.05 | | 18 | |

| Date | 23-Mar-18 | | | | | | | | | | | | | |
|----------|-----------|-----------|-----------|------|-----------|------|--------|-------|-----------------|------|-----|-----|----------|------|
| Location | Time | Depth (m) | Temp (oC) | | DO (mg/L) | | DO (%) | | Turbidity (NTU) | | pH | | SS(mg/L) | |
| WM1-C | 10:09 | 0.17 | 23.5 | 23.5 | 8.73 | 8.6 | 102.6 | 101.7 | 27.8 | 28.3 | 7.9 | 7.8 | 51 | 53.0 |
| | | | 23.5 | | 8.55 | | 100.7 | | 28.8 | | 7.7 | | 55 | |
| WM1 | 10:46 | 0.19 | 23.3 | 23.3 | 11.21 | 10.8 | 129.4 | 124.1 | 28.4 | 29.3 | 7.1 | 7.2 | 24 | 24.5 |
| | | | 23.3 | | 10.43 | | 118.8 | | 30.2 | | 7.2 | | 25 | |

| Date | 27-Mar-18 | | | | | | | | | | | | | |
|----------|-----------|-----------|-----------|------|-----------|-----|--------|-------|-----------------|-----|-----|-----|----------|------|
| Location | Time | Depth (m) | Temp (oC) | | DO (mg/L) | | DO (%) | | Turbidity (NTU) | | pH | | SS(mg/L) | |
| WM1-C | 9:37 | 0.15 | 22.4 | 22.4 | 9.51 | 9.5 | 109.5 | 109.9 | 8.2 | 8.2 | 7.6 | 7.6 | 11 | 10.0 |
| | | | 22.4 | | 9.53 | | 110.2 | | 8.1 | | 7.6 | | 9 | |
| WM1 | 9:55 | 0.20 | 22.5 | 22.5 | 4.53 | 4.5 | 52.1 | 52.2 | 5.1 | 5.4 | 6.7 | 6.7 | 3 | 3.5 |
| | | | 22.5 | | 4.55 | | 52.3 | | 5.8 | | 6.7 | | 4 | |

| Date | 29-Mar-18 | | | | | | | | | | | | | |
|----------|-----------|-----------|-----------|------|-----------|------|--------|-------|-----------------|-----|-----|-----|----------|-----|
| Location | Time | Depth (m) | Temp (oC) | | DO (mg/L) | | DO (%) | | Turbidity (NTU) | | pH | | SS(mg/L) | |
| WM1-C | 9:45 | 0.15 | 22.1 | 22.1 | 11.5 | 11.5 | 131.0 | 131.5 | 9.2 | 9.3 | 6.7 | 6.7 | 4 | 4.0 |
| | | | 22.1 | | 11.49 | | 131.9 | | 9.3 | | 6.7 | | 4 | |
| WM1 | 9:35 | 0.20 | 23.6 | 23.6 | 5.31 | 5.3 | 62.3 | 62.4 | 9.6 | 8.5 | 6.4 | 6.4 | 8 | 7.0 |
| | | | 23.6 | | 5.31 | | 62.4 | | 7.4 | | 6.4 | | 6 | |

| Date | 31-Mar-18 | | | | | | | | | | | | | |
|----------|-----------|-----------|-----------|------|-----------|-----|--------|------|-----------------|------|-----|-----|----------|------|
| Location | Time | Depth (m) | Temp (oC) | | DO (mg/L) | | DO (%) | | Turbidity (NTU) | | pH | | SS(mg/L) | |
| WM1-C | 9:40 | 0.15 | 21.9 | 21.9 | 8.33 | 8.3 | 99.6 | 99.8 | 12.1 | 12.2 | 7 | 7.0 | 12 | 12.0 |
| | | | 21.9 | | 8.35 | | 99.9 | | 12.2 | | 7 | | 12 | |
| WM1 | 9:30 | 0.16 | 24.1 | 24.1 | 6.54 | 6.5 | 79.7 | 79.6 | 7.3 | 8.2 | 6.8 | 6.8 | 6 | 6.0 |
| | | | 24.1 | | 6.51 | | 79.4 | | 9.1 | | 6.8 | | 6 | |

Water Quality Monitoring Data for Contract 2 and 3

| Date | 1-Mar-18 | | | | | | | | | | | | | |
|----------|----------|-----------|-----------|------|-----------|-----|--------|------|-----------------|-----|-----|-----|----------|------|
| Location | Time | Depth (m) | Temp (oC) | | DO (mg/L) | | DO (%) | | Turbidity (NTU) | | pH | | SS(mg/L) | |
| WM4-CA | 11:20 | 0.15 | 22.4 | 22.4 | 8.66 | 8.7 | 99.8 | 99.8 | 2.4 | 2.4 | 7.2 | 7.2 | 2 | 2.5 |
| | | | 22.4 | | 8.66 | | 99.7 | | 2.4 | | 7.2 | | 3 | |
| WM4-CB | 11:35 | 0.30 | 22.6 | 22.6 | 6.31 | 6.3 | 73.3 | 73.1 | 6.0 | 6.0 | 7.2 | 7.2 | 7 | 6.0 |
| | | | 22.6 | | 6.27 | | 72.8 | | 6.0 | | 7.2 | | 5 | |
| WM4 | 11:10 | 0.15 | 21.1 | 21.1 | 5.98 | 6.0 | 67.5 | 67.1 | 6.7 | 6.7 | 7.3 | 7.3 | 11 | 10.5 |
| | | | 21.1 | | 5.94 | | 66.6 | | 6.6 | | 7.3 | | 10 | |

| Date | 3-Mar-18 | | | | | | | | | | | | | |
|----------|----------|-----------|-----------|------|-----------|-----|--------|-------|-----------------|-----|-----|-----|----------|------|
| Location | Time | Depth (m) | Temp (oC) | | DO (mg/L) | | DO (%) | | Turbidity (NTU) | | pH | | SS(mg/L) | |
| WM4-CA | 10:49 | 0.19 | 23.5 | 23.5 | 8.64 | 8.7 | 101.6 | 102.0 | 2.1 | 2.2 | 7.3 | 7.3 | 5 | 4.5 |
| | | | 23.5 | | 8.67 | | 102.3 | | 2.2 | | 7.3 | | 4 | |
| WM4-CB | 11:08 | 0.29 | 23.1 | 23.1 | 6.15 | 6.2 | 71.0 | 71.4 | 8.3 | 8.4 | 7 | 7.0 | 7 | 8.0 |
| | | | 23.1 | | 6.17 | | 71.7 | | 8.4 | | 7 | | 9 | |
| WM4 | 10:37 | 0.24 | 22.5 | 22.5 | 6.15 | 6.1 | 71.3 | 71.1 | 8.2 | 8.3 | 7.3 | 7.3 | 19 | 18.0 |
| | | | 22.5 | | 6.13 | | 70.8 | | 8.4 | | 7.3 | | 17 | |

| Date | 5-Mar-18 | | | | | | | | | | | | | |
|----------|----------|-----------|-----------|------|-----------|-----|--------|------|-----------------|------|-----|-----|----------|------|
| Location | Time | Depth (m) | Temp (oC) | | DO (mg/L) | | DO (%) | | Turbidity (NTU) | | pH | | SS(mg/L) | |
| WM4-CA | 11:28 | 0.15 | 25 | 25.0 | 7.86 | 7.8 | 95.0 | 94.8 | 3.5 | 3.4 | 7 | 7.0 | <2 | <2 |
| | | | 25 | | 7.82 | | 94.6 | | 3.3 | | 7 | | <2 | |
| WM4-CB | 11:35 | 0.30 | 25.3 | 25.3 | 5.82 | 5.8 | 71.2 | 71.0 | 6.4 | 6.5 | 7.1 | 7.1 | 10 | 9.0 |
| | | | 25.3 | | 5.8 | | 70.7 | | 6.5 | | 7.1 | | 8 | |
| WM4 | 11:20 | 0.15 | 23.8 | 23.8 | 5.7 | 5.7 | 67.3 | 67.2 | 11.9 | 12.0 | 7.1 | 7.1 | 12 | 13.0 |
| | | | 23.8 | | 5.67 | | 67.0 | | 12.0 | | 7.1 | | 14 | |

| Date | 7-Mar-18 | | | | | | | | | | | | | |
|----------|----------|-----------|-----------|------|-----------|-----|--------|------|-----------------|------|-----|-----|----------|------|
| Location | Time | Depth (m) | Temp (oC) | | DO (mg/L) | | DO (%) | | Turbidity (NTU) | | pH | | SS(mg/L) | |
| WM4-CA | 11:35 | 0.15 | 21.6 | 21.6 | 6.81 | 6.8 | 76.6 | 76.8 | 3.0 | 2.9 | 7.4 | 7.4 | <2 | <2 |
| | | | 21.6 | | 6.85 | | 77.0 | | 2.7 | | 7.4 | | <2 | |
| WM4-CB | 11:45 | 0.30 | 21.6 | 21.6 | 5.03 | 5.0 | 56.4 | 56.2 | 9.7 | 10.1 | 7.1 | 7.1 | 14 | 13.5 |
| | | | 21.6 | | 4.99 | | 56.0 | | 10.1 | | 7.1 | | 13 | |
| WM4 | 11:25 | 0.15 | 21.4 | 21.4 | 5.61 | 5.6 | 62.8 | 62.8 | 13.1 | 13.1 | 7.2 | 7.2 | 13 | 12.0 |
| | | | 21.4 | | 5.61 | | 62.8 | | 13.0 | | 7.2 | | 11 | |

| Date | 9-Mar-18 | | | | | | | | | | | | | |
|----------|----------|-----------|-----------|------|-----------|-----|--------|------|-----------------|------|-----|-----|----------|------|
| Location | Time | Depth (m) | Temp (oC) | | DO (mg/L) | | DO (%) | | Turbidity (NTU) | | pH | | SS(mg/L) | |
| WM4-CA | 12:05 | 0.15 | 18 | 18.0 | 9.24 | 9.2 | 95.1 | 95.1 | 2.6 | 2.3 | 7.3 | 7.3 | <2 | <2 |
| | | | 18 | | 9.23 | | 95.1 | | 2.1 | | 7.3 | | <2 | |
| WM4-CB | 12:20 | 0.28 | 19.1 | 19.1 | 6.86 | 6.9 | 70.8 | 71.0 | 12.0 | 11.9 | 7 | 7.0 | 11 | 11.5 |
| | | | 19.1 | | 6.9 | | 71.2 | | 11.8 | | 7 | | 12 | |
| WM4 | 11:55 | 0.15 | 18.2 | 18.2 | 6.77 | 6.8 | 69.9 | 70.1 | 15.1 | 15.6 | 7.1 | 7.1 | 8 | 9.0 |
| | | | 18.2 | | 6.82 | | 70.3 | | 16.1 | | 7.1 | | 10 | |

| Date | 12-Mar-18 | | | | | | | | | | | | | |
|----------|-----------|-----------|-----------|------|-----------|-----|--------|------|-----------------|------|-----|-----|----------|------|
| Location | Time | Depth (m) | Temp (oC) | | DO (mg/L) | | DO (%) | | Turbidity (NTU) | | pH | | SS(mg/L) | |
| WM4-CA | 11:05 | 0.15 | 21.4 | 21.4 | 7.27 | 7.3 | 81.7 | 81.9 | 3.7 | 3.4 | 7.2 | 7.2 | 4 | 3.5 |
| | | | 21.4 | | 7.31 | | 82.1 | | 3.0 | | 7.2 | | 3 | |
| WM4-CB | 11:10 | 0.30 | 21.7 | 21.7 | 5.2 | 5.2 | 58.8 | 59.2 | 10.9 | 10.2 | 7.1 | 7.1 | 12 | 11.0 |
| | | | 21.7 | | 5.28 | | 59.5 | | 9.5 | | 7.1 | | 10 | |
| WM4 | 11:00 | 0.15 | 22.1 | 22.1 | 5.57 | 5.6 | 62.3 | 62.4 | 15.8 | 15.6 | 7.1 | 7.1 | 14 | 15.0 |
| | | | 22.1 | | 5.56 | | 62.4 | | 15.4 | | 7.1 | | 16 | |

| Date | 14-Mar-18 | | | | | | | | | | | | | |
|----------|-----------|-----------|-----------|------|-----------|-----|--------|------|-----------------|------|-----|-----|----------|-----|
| Location | Time | Depth (m) | Temp (oC) | | DO (mg/L) | | DO (%) | | Turbidity (NTU) | | pH | | SS(mg/L) | |
| WM4-CA | 11:35 | 0.15 | 20.5 | 20.5 | 6.13 | 6.2 | 67.8 | 68.1 | 7.3 | 7.0 | 7.2 | 7.2 | 3 | 3.0 |
| | | | 20.5 | | 6.17 | | 68.3 | | 6.7 | | 7.2 | | 3 | |
| WM4-CB | 11:45 | 0.31 | 20.8 | 20.8 | 4.32 | 4.3 | 48.1 | 48.3 | 9.3 | 9.2 | 6.9 | 6.9 | 10 | 9.5 |
| | | | 20.8 | | 4.36 | | 48.4 | | 9.0 | | 6.9 | | 9 | |
| WM4 | 11:25 | 0.16 | 20.7 | 20.7 | 5.59 | 5.6 | 62.3 | 62.4 | 11.2 | 10.5 | 7.2 | 7.2 | 9 | 9.5 |
| | | | 20.7 | | 5.6 | | 62.5 | | 9.7 | | 7.2 | | 10 | |

| Date | 16-Mar-18 | | | | | | | | | | | | | |
|----------|-----------|-----------|-----------|------|-----------|-----|--------|------|-----------------|------|-----|-----|----------|------|
| Location | Time | Depth (m) | Temp (oC) | | DO (mg/L) | | DO (%) | | Turbidity (NTU) | | pH | | SS(mg/L) | |
| WM4-CA | 12:15 | 0.15 | 24.7 | 24.7 | 6.97 | 7.0 | 83.7 | 84.0 | 5.1 | 5.3 | 7.5 | 7.5 | 3 | 2.5 |
| | | | 24.7 | | 7.02 | | 84.3 | | 5.6 | | 7.5 | | 2 | |
| WM4-CB | 12:25 | 0.30 | 25.4 | 25.4 | 5.64 | 5.7 | 68.2 | 68.4 | 5.1 | 5.2 | 7.2 | 7.2 | 4 | 4.0 |
| | | | 25.4 | | 5.67 | | 68.5 | | 5.4 | | 7.2 | | 4 | |
| WM4 | 12:07 | 0.15 | 23.9 | 23.9 | 5.77 | 5.8 | 68.1 | 68.0 | 15.0 | 13.8 | 7.6 | 7.6 | 27 | 26.0 |
| | | | 23.9 | | 5.75 | | 67.8 | | 12.5 | | 7.6 | | 25 | |

| Date | 19-Mar-18 | | | | | | | | | | | | | |
|----------|-----------|-----------|-----------|------|-----------|-----|--------|-------|-----------------|------|-----|-----|----------|------|
| Location | Time | Depth (m) | Temp (oC) | | DO (mg/L) | | DO (%) | | Turbidity (NTU) | | pH | | SS(mg/L) | |
| WM4-CA | 11:25 | 0.15 | 24.9 | 24.9 | 9.12 | 9.1 | 109.9 | 110.0 | 2.7 | 2.5 | 7 | 7.0 | 3 | 3.0 |
| | | | 24.9 | | 9.16 | | 110.1 | | 2.3 | | 7 | | 3 | |
| WM4-CB | 12:00 | 0.30 | 24.8 | 24.8 | 7.66 | 7.7 | 91.9 | 92.3 | 5.7 | 5.6 | 6.7 | 6.7 | 8 | 7.5 |
| | | | 24.8 | | 7.75 | | 92.7 | | 5.5 | | 6.7 | | 7 | |
| WM4 | 11:00 | 0.15 | 25 | 25.0 | 9.61 | 9.7 | 117.1 | 117.8 | 25.4 | 25.7 | 7.2 | 7.2 | 38 | 37.0 |
| | | | 25 | | 9.72 | | 118.5 | | 25.9 | | 7.2 | | 36 | |

| Date | 21-Mar-18 | | | | | | | | | | | | | |
|----------|-----------|-----------|-----------|------|-----------|-----|--------|-------|-----------------|------|-----|-----|----------|------|
| Location | Time | Depth (m) | Temp (oC) | | DO (mg/L) | | DO (%) | | Turbidity (NTU) | | pH | | SS(mg/L) | |
| WM4-CA | 12:16 | 0.15 | 23.6 | 23.6 | 8.89 | 8.9 | 104.8 | 104.8 | 1.7 | 1.7 | 7 | 7.0 | <2 | <2 |
| | | | 23.6 | | 8.87 | | 104.7 | | 1.7 | | 7 | | <2 | |
| WM4-CB | 13:00 | 0.29 | 23.3 | 23.3 | 8.35 | 8.4 | 97.1 | 97.7 | 9.1 | 9.0 | 6.5 | 6.5 | 6 | 5.5 |
| | | | 23.3 | | 8.48 | | 98.2 | | 8.9 | | 6.5 | | 5 | |
| WM4 | 12:30 | 0.15 | 22.6 | 22.6 | 7.91 | 7.9 | 91.6 | 91.8 | 14.7 | 15.1 | 6.6 | 6.6 | 22 | 22.0 |
| | | | 22.6 | | 7.92 | | 92.0 | | 15.5 | | 6.6 | | 22 | |

| Date | 23-Mar-18 | | | | | | | | | | | | | |
|----------|-----------|-----------|-----------|------|-----------|-----|--------|-------|-----------------|------|------|-----|----------|------|
| Location | Time | Depth (m) | Temp (oC) | | DO (mg/L) | | DO (%) | | Turbidity (NTU) | | pH | | SS(mg/L) | |
| WM4-CA | 12:16 | 0.15 | 24.1 | 24.1 | 8.04 | 8.0 | 104.2 | 104.1 | 4.3 | 4.3 | 7.61 | 7.6 | 5 | 5.0 |
| | | | 24.1 | | 8.03 | | 104.0 | | 4.2 | | 7.61 | | 5 | |
| WM4-CB | 12:28 | 0.29 | 24.7 | 24.7 | 7.55 | 7.5 | 96.6 | 96.7 | 8.3 | 8.5 | 7.1 | 7.1 | 14 | 13.0 |
| | | | 24.7 | | 7.52 | | 96.7 | | 8.6 | | 7.1 | | 12 | |
| WM4 | 11:49 | 0.19 | 25 | 25.0 | 7.34 | 7.3 | 95.1 | 95.1 | 32.3 | 32.1 | 7.4 | 7.4 | 33 | 31.5 |
| | | | 25 | | 7.34 | | 95.0 | | 31.9 | | 7.4 | | 30 | |

| Date | 27-Mar-18 | | | | | | | | | | | | | |
|----------|-----------|-----------|-----------|------|-----------|-----|--------|------|-----------------|------|-----|-----|----------|------|
| Location | Time | Depth (m) | Temp (oC) | | DO (mg/L) | | DO (%) | | Turbidity (NTU) | | pH | | SS(mg/L) | |
| WM4-CA | 12:20 | 0.15 | 26.6 | 26.6 | 7.1 | 7.1 | 82.7 | 82.8 | 4.4 | 4.7 | 7.2 | 7.2 | 6 | 5.0 |
| | | | 26.6 | | 7.12 | | 82.8 | | 5.1 | | 7.2 | | 4 | |
| WM4-CB | 12:25 | 0.30 | 24.6 | 24.6 | 5.32 | 5.3 | 63.5 | 63.8 | 6.6 | 6.4 | 7.1 | 7.1 | 5 | 4.5 |
| | | | 24.6 | | 5.37 | | 64.1 | | 6.2 | | 7.1 | | 4 | |
| WM4 | 12:10 | 0.15 | 23.8 | 23.8 | 4.75 | 4.7 | 57.2 | 57.0 | 21.7 | 21.6 | 7.2 | 7.2 | 19 | 19.5 |
| | | | 23.8 | | 4.71 | | 56.8 | | 21.5 | | 7.2 | | 20 | |

| Date | 29-Mar-18 | | | | | | | | | | | | | |
|----------|-----------|-----------|-----------|------|-----------|-----|--------|------|-----------------|------|-----|-----|----------|------|
| Location | Time | Depth (m) | Temp (oC) | | DO (mg/L) | | DO (%) | | Turbidity (NTU) | | pH | | SS(mg/L) | |
| WM4-CA | 13:25 | 0.15 | 24.9 | 24.9 | 6.82 | 6.8 | 82.2 | 82.4 | 6.6 | 6.3 | 7.4 | 7.4 | 3 | 3.5 |
| | | | 24.9 | | 6.84 | | 82.5 | | 6.0 | | 7.4 | | 4 | |
| WM4-CB | 13:38 | 0.31 | 25.6 | 25.6 | 5.1 | 5.1 | 62.2 | 62.3 | 11.4 | 11.2 | 6.9 | 6.9 | 9 | 8.5 |
| | | | 25.6 | | 5.11 | | 62.3 | | 10.9 | | 6.9 | | 8 | |
| WM4 | 13:15 | 0.15 | 24.1 | 24.1 | 5.16 | 5.2 | 61.4 | 61.5 | 17.4 | 17.7 | 7.1 | 7.1 | 18 | 18.5 |
| | | | 24.1 | | 5.17 | | 61.6 | | 18.0 | | 7.1 | | 19 | |

| Date | 31-Mar-18 | | | | | | | | | | | | | |
|----------|-----------|-----------|-----------|------|-----------|-----|--------|------|-----------------|------|-----|-----|----------|------|
| Location | Time | Depth (m) | Temp (oC) | | DO (mg/L) | | DO (%) | | Turbidity (NTU) | | pH | | SS(mg/L) | |
| WM4-CA | 11:15 | 0.15 | 25 | 25.0 | 7.33 | 7.4 | 88.1 | 88.7 | 5.9 | 4.9 | 7.4 | 7.4 | <2 | 2.0 |
| | | | 25 | | 7.43 | | 89.2 | | 3.9 | | 7.4 | | 2 | |
| WM4-CB | 11:30 | 0.31 | 23.9 | 23.9 | 6.83 | 6.8 | 81.1 | 81.3 | 7.8 | 7.7 | 7.1 | 7.1 | 7 | 7.0 |
| | | | 23.9 | | 6.85 | | 81.4 | | 7.6 | | 7.1 | | 7 | |
| WM4 | 11:00 | 0.15 | 24.7 | 24.7 | 6.02 | 6.0 | 73.2 | 73.3 | 13.2 | 14.8 | 7.6 | 7.6 | 18 | 17.5 |
| | | | 24.7 | | 6.05 | | 73.4 | | 16.3 | | 7.6 | | 17 | |

Water Quality Monitoring Data for Contract 6

| Date | | 1-Mar-18 | | | | | | | | | | | | |
|----------|-------|-----------|-----------|------|-----------|-----|--------|------|-----------------|------|------|-----|----------|-----|
| Location | Time | Depth (m) | Temp (oC) | | DO (mg/L) | | DO (%) | | Turbidity (NTU) | | pH | | SS(mg/L) | |
| WM2A-C | 10:25 | 0.25 | 19.1 | 19.1 | 7.97 | 8.0 | 85.6 | 85.5 | 13.5 | 13.5 | 7.30 | 7.3 | 5 | 4.5 |
| | | | 19.1 | | 7.95 | | 85.3 | | 13.4 | | 7.30 | | 4 | |
| WM2A | 10:10 | 0.15 | 18.9 | 18.9 | 8.01 | 8.0 | 86.3 | 86.2 | 4.5 | 4.6 | 7.40 | 7.4 | 2 | 2.0 |
| | | | 18.9 | | 8 | | 86.1 | | 4.6 | | 7.40 | | 2 | |

| Date | | 3-Mar-18 | | | | | | | | | | | | |
|----------|------|-----------|-----------|------|-----------|-----|--------|------|-----------------|------|------|-----|----------|-----|
| Location | Time | Depth (m) | Temp (oC) | | DO (mg/L) | | DO (%) | | Turbidity (NTU) | | pH | | SS(mg/L) | |
| WM2A-C | 9:27 | 0.28 | 20.1 | 20.1 | 7.83 | 7.8 | 86.1 | 85.8 | 14.5 | 14.5 | 7.30 | 7.3 | 8 | 7.0 |
| | | | 20.1 | | 7.82 | | 85.5 | | 14.4 | | 7.30 | | 6 | |
| WM2A | 9:14 | 0.17 | 20.7 | 20.7 | 7.45 | 7.5 | 83.0 | 83.5 | 7.8 | 7.9 | 7.40 | 7.4 | 3 | 3.5 |
| | | | 20.7 | | 7.47 | | 84.0 | | 7.9 | | 7.40 | | 4 | |

| Date | | 5-Mar-18 | | | | | | | | | | | | |
|----------|-------|-----------|-----------|------|-----------|-----|--------|------|-----------------|------|------|-----|----------|------|
| Location | Time | Depth (m) | Temp (oC) | | DO (mg/L) | | DO (%) | | Turbidity (NTU) | | pH | | SS(mg/L) | |
| WM2A-C | 10:35 | 0.28 | 21.6 | 21.6 | 7.42 | 7.4 | 83.8 | 83.7 | 18.8 | 18.9 | 7.40 | 7.4 | 10 | 10.5 |
| | | | 21.6 | | 7.41 | | 83.6 | | 18.9 | | 7.40 | | 11 | |
| WM2A | 10:25 | 0.15 | 21.8 | 21.8 | 7.18 | 7.2 | 81.9 | 81.9 | 6.1 | 6.2 | 7.30 | 7.3 | 7 | 7.5 |
| | | | 21.8 | | 7.17 | | 81.8 | | 6.2 | | 7.30 | | 8 | |

| Date | | 7-Mar-18 | | | | | | | | | | | | |
|----------|-------|-----------|-----------|------|-----------|-----|--------|------|-----------------|------|------|-----|----------|-----|
| Location | Time | Depth (m) | Temp (oC) | | DO (mg/L) | | DO (%) | | Turbidity (NTU) | | pH | | SS(mg/L) | |
| WM2A-C | 10:35 | 0.26 | 21.4 | 21.4 | 6.62 | 6.6 | 73.8 | 73.9 | 16.2 | 16.8 | 7.40 | 7.4 | 5 | 5.0 |
| | | | 21.4 | | 6.61 | | 73.9 | | 17.3 | | 7.40 | | 5 | |
| WM2A | 10:05 | 0.15 | 21.5 | 21.5 | 6.84 | 6.9 | 76.8 | 77.3 | 7.4 | 7.3 | 7.50 | 7.5 | 3 | 3.0 |
| | | | 21.5 | | 6.95 | | 77.7 | | 7.2 | | 7.50 | | 3 | |

| Date | | 9-Mar-18 | | | | | | | | | | | | |
|----------|-------|-----------|-----------|------|-----------|-----|--------|------|-----------------|------|------|-----|----------|------|
| Location | Time | Depth (m) | Temp (oC) | | DO (mg/L) | | DO (%) | | Turbidity (NTU) | | pH | | SS(mg/L) | |
| WM2A-C | 10:25 | 0.25 | 14.1 | 14.1 | 8.93 | 9.0 | 86.1 | 86.4 | 79.9 | 79.9 | 7.50 | 7.5 | 35 | 34.5 |
| | | | 14.1 | | 9.03 | | 86.7 | | 79.8 | | 7.50 | | 34 | |
| WM2A | 10:10 | 0.15 | 15.7 | 15.7 | 8.95 | 9.0 | 88.9 | 89.1 | 5.1 | 5.0 | 7.40 | 7.4 | <2 | <2 |
| | | | 15.7 | | 8.96 | | 89.2 | | 5.0 | | 7.40 | | <2 | |

| Date | | 12-Mar-18 | | | | | | | | | | | | |
|----------|-------|-----------|-----------|------|-----------|-----|--------|------|-----------------|-----|------|-----|----------|-----|
| Location | Time | Depth (m) | Temp (oC) | | DO (mg/L) | | DO (%) | | Turbidity (NTU) | | pH | | SS(mg/L) | |
| WM2A-C | 10:10 | 0.20 | 17.6 | 17.6 | 7.29 | 7.3 | 77.8 | 77.8 | 8.7 | 8.8 | 7.20 | 7.2 | 4 | 3.5 |
| | | | 17.6 | | 7.28 | | 77.7 | | 8.8 | | 7.20 | | 3 | |
| WM2A | 9:56 | 0.15 | 17.9 | 17.9 | 7.14 | 7.1 | 77.7 | 77.7 | 5.7 | 5.7 | 7.20 | 7.2 | 3 | 2.5 |
| | | | 17.9 | | 7.12 | | 77.6 | | 5.7 | | 7.20 | | 2 | |

| Date 14-Mar-18 | | | | | | | | | | | | | | |
|-----------------------|-------|-----------|-----------|------|-----------|-----|--------|------|-----------------|------|------|-----|----------|------|
| Location | Time | Depth (m) | Temp (oC) | | DO (mg/L) | | DO (%) | | Turbidity (NTU) | | pH | | SS(mg/L) | |
| WM2A-C | 10:20 | 0.28 | 19.9 | 19.9 | 7.16 | 7.1 | 78.3 | 78.2 | 22.3 | 22.3 | 7.20 | 7.2 | 10 | 10.5 |
| | | | 19.9 | | 7.12 | | 78.1 | | 22.3 | | 7.20 | | 11 | |
| WM2A | 10:00 | 0.17 | 20.8 | 20.8 | 7.71 | 7.7 | 84.2 | 84.3 | 22.1 | 20.7 | 7.20 | 7.2 | 12 | 11.5 |
| | | | 20.8 | | 7.7 | | 84.4 | | 19.2 | | 7.20 | | 11 | |

| Date 16-Mar-18 | | | | | | | | | | | | | | |
|-----------------------|-------|-----------|-----------|------|-----------|-----|--------|------|-----------------|------|------|-----|----------|------|
| Location | Time | Depth (m) | Temp (oC) | | DO (mg/L) | | DO (%) | | Turbidity (NTU) | | pH | | SS(mg/L) | |
| WM2A-C | 10:50 | 0.26 | 20.5 | 20.5 | 6.04 | 6.0 | 67.6 | 67.7 | 21.6 | 21.4 | 7.30 | 7.3 | 5 | 6.0 |
| | | | 20.5 | | 6.05 | | 67.8 | | 21.2 | | 7.30 | | 7 | |
| WM2A | 10:25 | 0.16 | 21.1 | 21.1 | 6.71 | 6.7 | 75.4 | 75.5 | 18.0 | 18.3 | 6.90 | 6.9 | 11 | 11.5 |
| | | | 21.1 | | 6.71 | | 75.5 | | 18.6 | | 6.90 | | 12 | |

| Date 19-Mar-18 | | | | | | | | | | | | | | |
|-----------------------|-------|-----------|-----------|------|-----------|-----|--------|-------|-----------------|-----|------|-----|----------|------|
| Location | Time | Depth (m) | Temp (oC) | | DO (mg/L) | | DO (%) | | Turbidity (NTU) | | pH | | SS(mg/L) | |
| WM2A-C | 16:01 | 0.17 | 24.1 | 24.1 | 8.34 | 8.3 | 99.2 | 99.2 | 9.5 | 9.5 | 7.98 | 8.0 | 25 | 17.0 |
| | | | 24.1 | | 8.33 | | 99.1 | | 9.5 | | 7.97 | | 9 | |
| WM2A | 11:39 | 0.26 | 24.4 | 24.4 | 8.4 | 8.4 | 100.5 | 100.6 | 7.3 | 7.4 | 7.72 | 7.7 | 9 | 11.0 |
| | | | 24.4 | | 8.39 | | 100.6 | | 7.4 | | 7.71 | | 13 | |

| Date 21-Mar-18 | | | | | | | | | | | | | | |
|-----------------------|-------|-----------|-----------|------|-----------|-----|--------|-------|-----------------|------|------|-----|----------|------|
| Location | Time | Depth (m) | Temp (oC) | | DO (mg/L) | | DO (%) | | Turbidity (NTU) | | pH | | SS(mg/L) | |
| WM2A-C | 14:09 | 0.27 | 21.6 | 21.6 | 8.75 | 8.8 | 99.3 | 99.3 | 22.9 | 21.8 | 7.26 | 7.3 | 25 | 44.5 |
| | | | 21.6 | | 8.76 | | 99.3 | | 20.6 | | 7.26 | | 64 | |
| WM2A | 13:35 | 0.24 | 21.6 | 21.6 | 8.81 | 8.8 | 100.1 | 100.1 | 13.5 | 13.3 | 7.56 | 7.6 | 9 | 11.0 |
| | | | 21.6 | | 8.81 | | 100.1 | | 13.1 | | 7.55 | | 13 | |

| Date 23-Mar-18 | | | | | | | | | | | | | | |
|-----------------------|-------|-----------|-----------|------|-----------|-----|--------|-------|-----------------|------|------|-----|----------|------|
| Location | Time | Depth (m) | Temp (oC) | | DO (mg/L) | | DO (%) | | Turbidity (NTU) | | pH | | SS(mg/L) | |
| WM2A-C | 13:05 | 0.21 | 22.9 | 22.8 | 8.65 | 8.6 | 99.4 | 98.5 | 21.5 | 21.9 | 8.60 | 8.7 | 21 | 22.0 |
| | | | 22.7 | | 8.51 | | 97.6 | | 22.2 | | 8.80 | | 23 | |
| WM2A | 13:34 | 0.23 | 22.9 | 22.9 | 9.59 | 9.5 | 109.6 | 108.4 | 25.0 | 25.3 | 8.40 | 8.4 | 10 | 11.0 |
| | | | 22.8 | | 9.36 | | 107.1 | | 25.6 | | 8.30 | | 12 | |

| Date 27-Mar-18 | | | | | | | | | | | | | | |
|-----------------------|-------|-----------|-----------|------|-----------|-----|--------|------|-----------------|------|------|-----|----------|-----|
| Location | Time | Depth (m) | Temp (oC) | | DO (mg/L) | | DO (%) | | Turbidity (NTU) | | pH | | SS(mg/L) | |
| WM2A-C | 10:45 | 0.26 | 20.7 | 20.7 | 6.07 | 6.1 | 67.7 | 67.7 | 19.8 | 19.8 | 7.10 | 7.1 | 9 | 9.5 |
| | | | 20.7 | | 6.03 | | 67.6 | | 19.7 | | 7.10 | | 10 | |
| WM2A | 10:10 | 0.16 | 21.9 | 21.9 | 7.74 | 7.7 | 87.4 | 87.4 | 9.1 | 9.7 | 6.90 | 6.9 | 6 | 6.5 |
| | | | 21.9 | | 7.72 | | 87.3 | | 10.3 | | 6.90 | | 7 | |

| Date | | 29-Mar-18 | | | | | | | | | | | | |
|----------|-------|-----------|-----------|------|-----------|-----|--------|------|-----------------|------|------|-----|----------|-----|
| Location | Time | Depth (m) | Temp (oC) | | DO (mg/L) | | DO (%) | | Turbidity (NTU) | | pH | | SS(mg/L) | |
| WM2A-C | 10:10 | 0.28 | 21 | 21.0 | 5.87 | 5.9 | 66.1 | 66.2 | 14.6 | 14.8 | 6.80 | 6.8 | 6 | 6.5 |
| | | | 21 | | 5.86 | | 66.2 | | 14.9 | | 6.80 | | 7 | |
| WM2A | 10:00 | 0.16 | 21.4 | 21.4 | 7.53 | 7.5 | 84.8 | 84.9 | 12.9 | 12.1 | 6.80 | 6.8 | 7 | 7.0 |
| | | | 21.4 | | 7.54 | | 85.0 | | 11.3 | | 6.80 | | 7 | |

| Date | | 31-Mar-18 | | | | | | | | | | | | |
|----------|-------|-----------|-----------|------|-----------|-----|--------|-------|-----------------|------|------|-----|----------|------|
| Location | Time | Depth (m) | Temp (oC) | | DO (mg/L) | | DO (%) | | Turbidity (NTU) | | pH | | SS(mg/L) | |
| WM2A-C | 10:00 | 0.28 | 22 | 22.0 | 9.32 | 9.3 | 115.2 | 115.3 | 16.1 | 16.0 | 6.70 | 6.7 | 3 | 3.5 |
| | | | 22 | | 9.35 | | 115.4 | | 15.8 | | 6.70 | | 4 | |
| WM2A | 9:52 | 0.15 | 21 | 21.0 | 7.49 | 7.5 | 90.5 | 90.9 | 10.4 | 10.4 | 6.80 | 6.8 | 13 | 13.0 |
| | | | 21 | | 7.59 | | 91.3 | | 10.3 | | 6.80 | | 13 | |

Water Quality Monitoring Data for Contract 2 and 6

| Date | | 1-Mar-18 | | | | | | | | | | | | |
|----------|-------|-----------|-----------|------|-----------|-----|--------|------|-----------------|------|-----|-----|----------|------|
| Location | Time | Depth (m) | Temp (oC) | | DO (mg/L) | | DO (%) | | Turbidity (NTU) | | pH | | SS(mg/L) | |
| WM3-C | 10:40 | 0.15 | 23.6 | 23.6 | 8.23 | 8.2 | 97.3 | 97.3 | 1.6 | 1.6 | 7.4 | 7.4 | 3 | 3.5 |
| | | | 23.6 | | 8.22 | | 97.2 | | 1.5 | | 7.4 | | 4 | |
| WM3 | 10:55 | 0.15 | 21.1 | 21.1 | 8.05 | 8.1 | 90.2 | 90.2 | 24.2 | 24.5 | 7.5 | 7.5 | 38 | 39.5 |
| | | | 21.1 | | 8.06 | | 90.2 | | 24.7 | | 7.5 | | 41 | |

| Date | | 2-Mar-18 | | | | | | | | | | | | |
|----------|-------|-----------|-----------|------|-----------|--|--------|--|-----------------|-----|----|--|----------|-----|
| Location | Time | Depth (m) | Temp (oC) | | DO (mg/L) | | DO (%) | | Turbidity (NTU) | | pH | | SS(mg/L) | |
| WM3-C | 10:00 | 0.15 | 24.2 | 24.2 | | | | | 2.8 | 2.9 | | | 4 | 4.0 |
| | | | 24.2 | | | | | | 2.9 | | 4 | | | |
| WM3 | 10:15 | 0.15 | 21.8 | 21.8 | | | | | 4.3 | 4.2 | | | 5 | 5.0 |
| | | | 21.8 | | | | | | 4.0 | | 5 | | | |

| Date | | 3-Mar-18 | | | | | | | | | | | | |
|----------|------|-----------|-----------|------|-----------|-----|--------|------|-----------------|-------|-----|-----|----------|-------|
| Location | Time | Depth (m) | Temp (oC) | | DO (mg/L) | | DO (%) | | Turbidity (NTU) | | pH | | SS(mg/L) | |
| WM3-C | 9:59 | 0.19 | 24 | 24.0 | 8.26 | 8.3 | 98.0 | 98.7 | 3.4 | 3.5 | 7.2 | 7.2 | 8 | 7.5 |
| | | | 24 | | 8.3 | | 99.4 | | 3.5 | | 7.2 | | 7 | |
| WM3 | 9:44 | 0.15 | 21.7 | 21.8 | 7.52 | 7.5 | 85.7 | 86.1 | 120.0 | 119.0 | 7 | 7.0 | 190 | 185.0 |
| | | | 21.8 | | 7.54 | | 86.4 | | 118.0 | | 7 | | 180 | |

| Date | | 5-Mar-18 | | | | | | | | | | | | |
|----------|-------|-----------|-----------|------|-----------|-----|--------|------|-----------------|------|-----|-----|----------|------|
| Location | Time | Depth (m) | Temp (oC) | | DO (mg/L) | | DO (%) | | Turbidity (NTU) | | pH | | SS(mg/L) | |
| WM3-C | 11:00 | 0.15 | 25 | 25.0 | 8.05 | 8.0 | 98.7 | 98.5 | 2.2 | 2.3 | 7.6 | 7.6 | 3 | 3.5 |
| | | | 25 | | 8.01 | | 98.3 | | 2.3 | | 7.6 | | 4 | |
| WM3 | 10:50 | 0.15 | 23.5 | 23.5 | 8.21 | 8.2 | 96.7 | 96.5 | 13.0 | 13.2 | 8 | 8.0 | 11 | 11.0 |
| | | | 23.5 | | 8.16 | | 96.3 | | 13.4 | | 8 | | 11 | |

| Date | | 6-Mar-18 | | | | | | | | | | | | |
|----------|-------|-----------|-----------|------|-----------|--|--------|--|-----------------|-----|----|--|----------|-----|
| Location | Time | Depth (m) | Temp (oC) | | DO (mg/L) | | DO (%) | | Turbidity (NTU) | | pH | | SS(mg/L) | |
| WM3-C | 11:59 | 0.15 | 23 | 23.0 | | | | | 1.7 | 1.7 | | | 6 | 6.0 |
| | | | 23 | | | | | | 1.6 | | 6 | | | |
| WM3 | 11:45 | 0.15 | 22.5 | 22.5 | | | | | 3.9 | 4.1 | | | 6 | 6.0 |
| | | | 22.5 | | | | | | 4.3 | | 6 | | | |

| Date | | 7-Mar-18 | | | | | | | | | | | | |
|----------|-------|-----------|-----------|------|-----------|-----|--------|------|-----------------|-----|-----|-----|----------|-----|
| Location | Time | Depth (m) | Temp (oC) | | DO (mg/L) | | DO (%) | | Turbidity (NTU) | | pH | | SS(mg/L) | |
| WM3-C | 10:50 | 0.15 | 22.2 | 22.2 | 8.25 | 8.3 | 93.9 | 93.9 | 7.5 | 7.1 | 8.8 | 8.8 | 5 | 5.0 |
| | | | 22.2 | | 8.25 | | 93.8 | | 6.7 | | 8.8 | | 5 | |
| WM3 | 11:05 | 0.15 | 21.3 | 21.3 | 8.09 | 8.1 | 89.4 | 90.0 | 10.1 | 9.5 | 8 | 8.0 | 4 | 4.0 |
| | | | 21.3 | | 8.12 | | 90.6 | | 8.9 | | 8 | | 4 | |

| Date | 9-Mar-18 | | | | | | | | | | | | | |
|----------|----------|-----------|-----------|------|-----------|-----|--------|------|-----------------|-----|-----|-----|----------|-----|
| Location | Time | Depth (m) | Temp (oC) | | DO (mg/L) | | DO (%) | | Turbidity (NTU) | | pH | | SS(mg/L) | |
| WM3-C | 11:01 | 0.21 | 19.1 | 19.1 | 9.22 | 9.4 | 96.9 | 98.0 | 3.8 | 3.6 | 8.5 | 8.7 | 8 | 7.0 |
| | | | 19.1 | | 9.49 | | 99.1 | | 3.4 | | 8.9 | | 6 | |
| WM3 | 11:15 | 0.15 | 19.7 | 19.7 | 6.61 | 6.6 | 72.5 | 72.7 | 6.8 | 6.6 | 8.3 | 8.3 | 5 | 6.0 |
| | | | 19.7 | | 6.62 | | 72.9 | | 6.5 | | 8.3 | | 7 | |

| Date | 12-Mar-18 | | | | | | | | | | | | | |
|----------|-----------|-----------|-----------|------|-----------|-----|--------|------|-----------------|-----|-----|-----|----------|-----|
| Location | Time | Depth (m) | Temp (oC) | | DO (mg/L) | | DO (%) | | Turbidity (NTU) | | pH | | SS(mg/L) | |
| WM3-C | 10:25 | 0.17 | 22.1 | 22.1 | 7.96 | 8.0 | 90.4 | 90.5 | 2.5 | 2.7 | 8.8 | 8.8 | 2 | 2.5 |
| | | | 22.1 | | 7.97 | | 90.5 | | 3.0 | | 8.8 | | 3 | |
| WM3 | 10:32 | 0.15 | 20.6 | 20.6 | 7.67 | 7.7 | 84.6 | 85.1 | 5.3 | 5.3 | 7.9 | 7.9 | 5 | 4.5 |
| | | | 20.6 | | 7.75 | | 85.5 | | 5.3 | | 7.9 | | 4 | |

| Date | 14-Mar-18 | | | | | | | | | | | | | |
|----------|-----------|-----------|-----------|------|-----------|-----|--------|------|-----------------|-----|-----|-----|----------|------|
| Location | Time | Depth (m) | Temp (oC) | | DO (mg/L) | | DO (%) | | Turbidity (NTU) | | pH | | SS(mg/L) | |
| WM3-C | 10:38 | 0.16 | 23 | 23.0 | 7.35 | 7.4 | 84.8 | 85.1 | 6.0 | 6.6 | 8.8 | 8.8 | 18 | 19.0 |
| | | | 23 | | 7.42 | | 85.4 | | 7.3 | | 8.8 | | 20 | |
| WM3 | 10:50 | 0.15 | 21.7 | 21.7 | 6.68 | 6.7 | 75.0 | 75.1 | 9.1 | 9.4 | 8.2 | 8.2 | 7 | 7.5 |
| | | | 21.7 | | 6.69 | | 75.2 | | 9.7 | | 8.2 | | 8 | |

| Date | 16-Mar-18 | | | | | | | | | | | | | |
|----------|-----------|-----------|-----------|------|-----------|-----|--------|------|-----------------|-----|-----|-----|----------|----|
| Location | Time | Depth (m) | Temp (oC) | | DO (mg/L) | | DO (%) | | Turbidity (NTU) | | pH | | SS(mg/L) | |
| WM3-C | 11:35 | 0.15 | 25 | 25.0 | 6.62 | 6.6 | 79.8 | 79.8 | 3.0 | 3.0 | 8.4 | 8.4 | <2 | <2 |
| | | | 25 | | 6.61 | | 79.7 | | 3.0 | | 8.4 | | <2 | |
| WM3 | 11:45 | 0.15 | 24 | 24.0 | 6.71 | 6.7 | 79.8 | 79.7 | 4.3 | 4.5 | 8.1 | 8.1 | <2 | <2 |
| | | | 24 | | 6.69 | | 79.6 | | 4.7 | | 8.1 | | <2 | |

| Date | 19-Mar-18 | | | | | | | | | | | | | |
|----------|-----------|-----------|-----------|------|-----------|-----|--------|-------|-----------------|-----|-----|-----|----------|-----|
| Location | Time | Depth (m) | Temp (oC) | | DO (mg/L) | | DO (%) | | Turbidity (NTU) | | pH | | SS(mg/L) | |
| WM3-C | 11:30 | 0.16 | 24.5 | 24.5 | 8.23 | 8.2 | 98.9 | 98.9 | 9.6 | 9.6 | 9.4 | 9.4 | 10 | 9.5 |
| | | | 24.5 | | 8.23 | | 98.9 | | 9.6 | | 9.4 | | 9 | |
| WM3 | 10:45 | 0.15 | 24 | 24.0 | 8.43 | 8.4 | 100.2 | 100.3 | 5.9 | 5.9 | 6.1 | 6.1 | 3 | 3.5 |
| | | | 24 | | 8.43 | | 100.3 | | 5.9 | | 6.1 | | 4 | |

| Date | 21-Mar-18 | | | | | | | | | | | | | |
|----------|-----------|-----------|-----------|------|-----------|-----|--------|-------|-----------------|-----|------|-----|----------|-----|
| Location | Time | Depth (m) | Temp (oC) | | DO (mg/L) | | DO (%) | | Turbidity (NTU) | | pH | | SS(mg/L) | |
| WM3-C | 10:30 | 0.16 | 22.3 | 22.3 | 8.79 | 8.8 | 101.5 | 101.6 | 5.2 | 5.3 | 8.05 | 8.1 | 4 | 6.0 |
| | | | 22.3 | | 8.81 | | 101.6 | | 5.4 | | 8.08 | | 8 | |
| WM3 | 10:50 | 0.15 | 21.5 | 21.5 | 8.97 | 9.0 | 101.7 | 101.7 | 9.4 | 9.4 | 7.5 | 7.5 | <2 | <2 |
| | | | 21.5 | | 8.97 | | 101.7 | | 9.4 | | 7.51 | | <2 | |

| Date | 23-Mar-18 | | | | | | | | | | | | | |
|----------|-----------|-----------|-----------|------|-----------|-----|--------|-------|-----------------|-----|------|-----|----------|-----|
| Location | Time | Depth (m) | Temp (oC) | | DO (mg/L) | | DO (%) | | Turbidity (NTU) | | pH | | SS(mg/L) | |
| WM3-C | 11:50 | 0.16 | 24 | 24.0 | 8.29 | 8.3 | 98.7 | 98.7 | 5.8 | 5.8 | 8.94 | 8.9 | 5 | 5.5 |
| | | | 24 | | 8.29 | | 98.7 | | 5.8 | | 8.94 | | 6 | |
| WM3 | 11:30 | 0.15 | 23.1 | 23.1 | 8.66 | 8.7 | 101.3 | 101.3 | 4.9 | 4.9 | 8.85 | 8.9 | 6 | 7.0 |
| | | | 23.1 | | 8.66 | | 101.3 | | 4.9 | | 8.85 | | 8 | |

| Date | 27-Mar-18 | | | | | | | | | | | | | |
|----------|-----------|-----------|-----------|------|-----------|------|--------|-------|-----------------|-----|-----|-----|----------|------|
| Location | Time | Depth (m) | Temp (oC) | | DO (mg/L) | | DO (%) | | Turbidity (NTU) | | pH | | SS(mg/L) | |
| WM3-C | 11:30 | 0.16 | 24.6 | 24.6 | 10.78 | 10.9 | 128.6 | 129.8 | 6.9 | 6.9 | 6.6 | 6.6 | 13 | 12.5 |
| | | | 24.6 | | 11.04 | | 130.9 | | 7.0 | | 6.6 | | 12 | |
| WM3 | 11:45 | 0.15 | 27.3 | 27.3 | 6.09 | 6.1 | 76.1 | 76.2 | 6.9 | 7.3 | 6.7 | 6.7 | 5 | 6.0 |
| | | | 27.3 | | 6.11 | | 76.3 | | 7.8 | | 6.7 | | 7 | |

| Date | 29-Mar-18 | | | | | | | | | | | | | |
|----------|-----------|-----------|-----------|------|-----------|-----|--------|------|-----------------|------|-----|-----|----------|-------|
| Location | Time | Depth (m) | Temp (oC) | | DO (mg/L) | | DO (%) | | Turbidity (NTU) | | pH | | SS(mg/L) | |
| WM3-C | 10:30 | 0.16 | 25.2 | 25.2 | 7.02 | 7.1 | 83.2 | 83.6 | 59.3 | 62.1 | 7.8 | 7.8 | 128 | 134.0 |
| | | | 25.2 | | 7.08 | | 83.9 | | 64.9 | | 7.8 | | 140 | |
| WM3 | 10:45 | 0.15 | 24.6 | 24.6 | 6.16 | 6.2 | 73.8 | 73.9 | 21.1 | 23.0 | 7.6 | 7.6 | 13 | 12.5 |
| | | | 24.6 | | 6.17 | | 73.9 | | 24.8 | | 7.6 | | 12 | |

| Date | 31-Mar-18 | | | | | | | | | | | | | |
|----------|-----------|-----------|-----------|------|-----------|-----|--------|------|-----------------|------|-----|-----|----------|------|
| Location | Time | Depth (m) | Temp (oC) | | DO (mg/L) | | DO (%) | | Turbidity (NTU) | | pH | | SS(mg/L) | |
| WM3-C | 10:20 | 0.15 | 25.8 | 25.8 | 7 | 7.1 | 85.4 | 85.9 | 10.9 | 10.9 | 7.9 | 7.9 | 10 | 11.0 |
| | | | 25.8 | | 7.11 | | 86.3 | | 9.4 | | 7.9 | | 12 | |
| WM3 | 10:29 | 0.15 | 24.5 | 24.5 | 7.35 | 7.3 | 87.7 | 87.6 | 9.9 | 9.7 | 6.8 | 6.8 | 10 | 10.0 |
| | | | 24.5 | | 7.33 | | 87.5 | | 9.6 | | 6.8 | | 10 | |




Remarks: # Additional water quality monitoring for the parameters with Action/Limit Level exceedance triggered only.

| | |
|--|--------------|
| | Action Level |
| | Limit Level |




Appendix J

Graphical Plots for Monitoring Result




Air Quality – 1-hour TSP

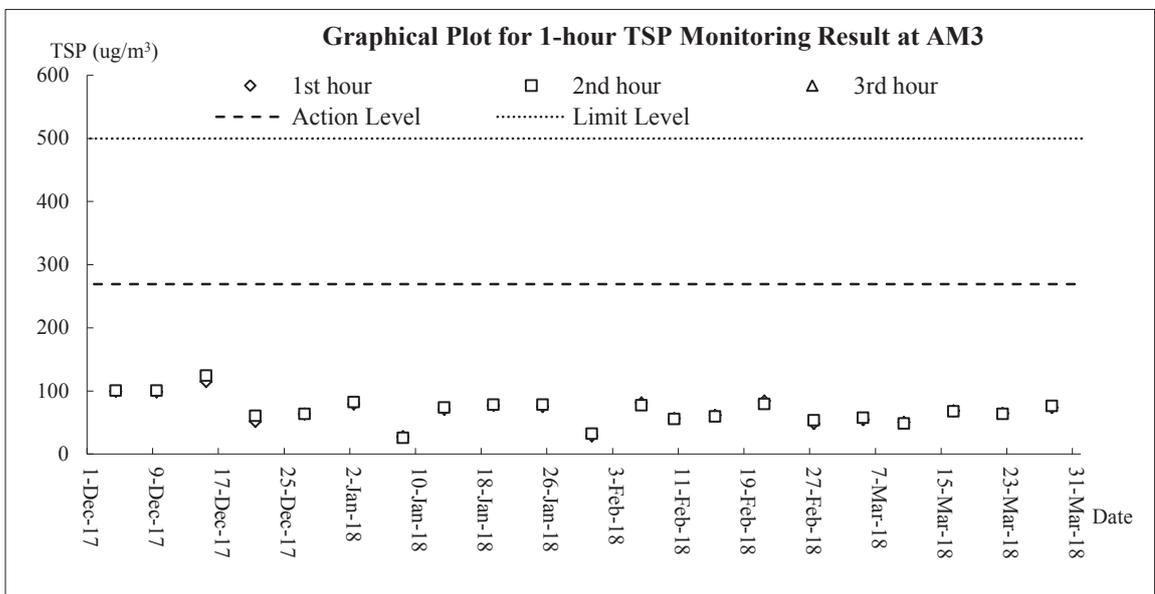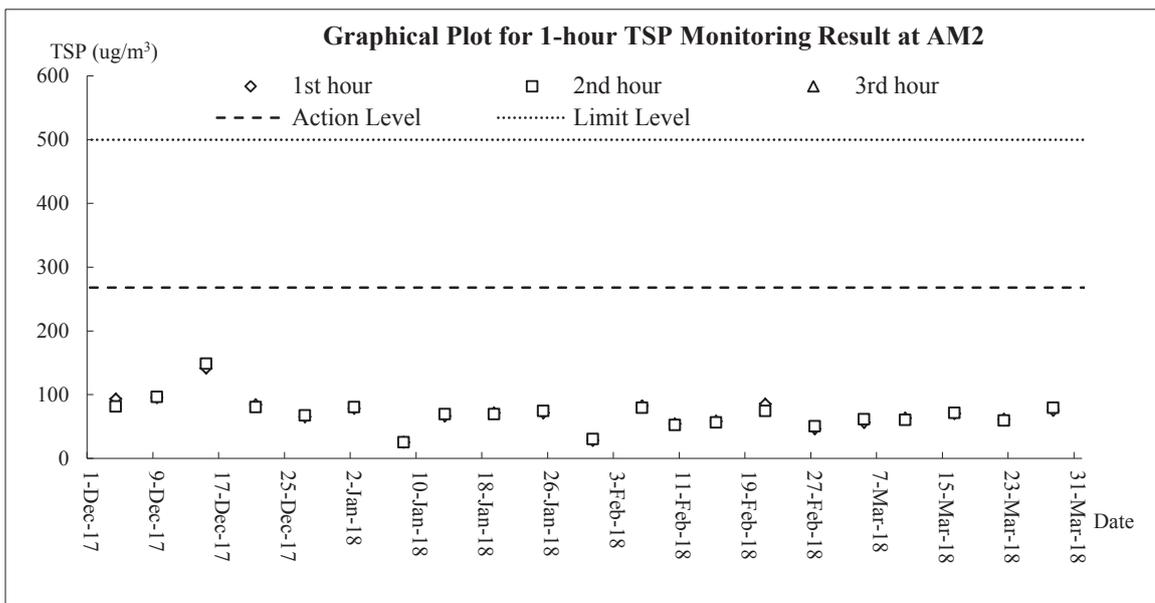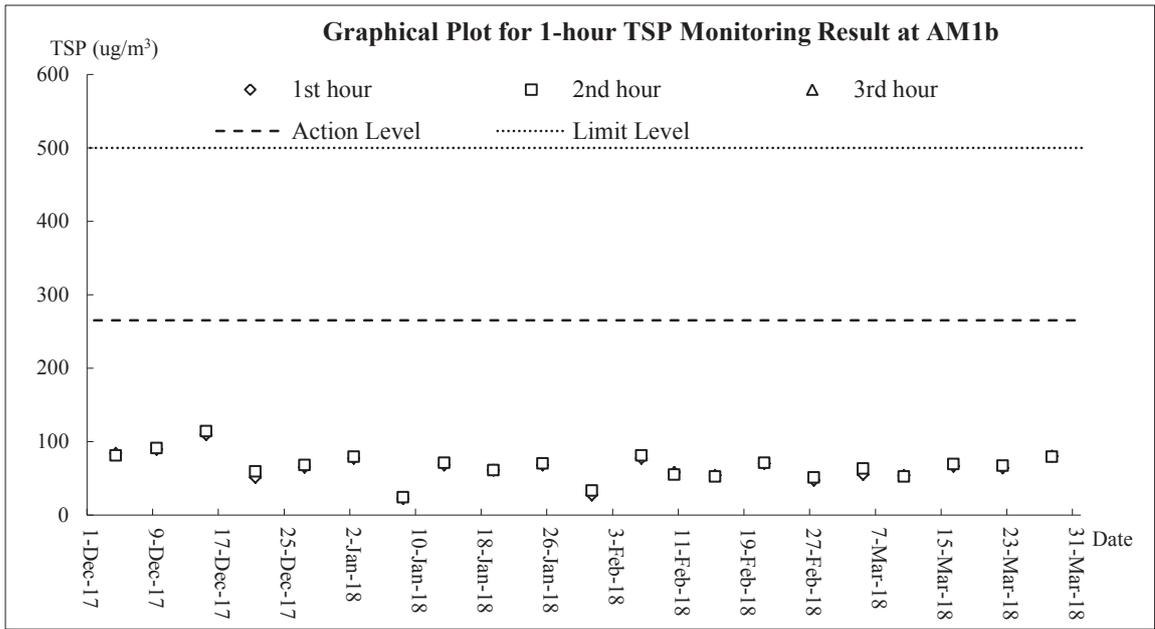




Agreement No. CE 45/2008 (CE)
 Liantang/Heung Yuen Wai Boundary Control Point and Associated Works
 Monthly Environmental Monitoring & Audit Report (No.56) – March 2018

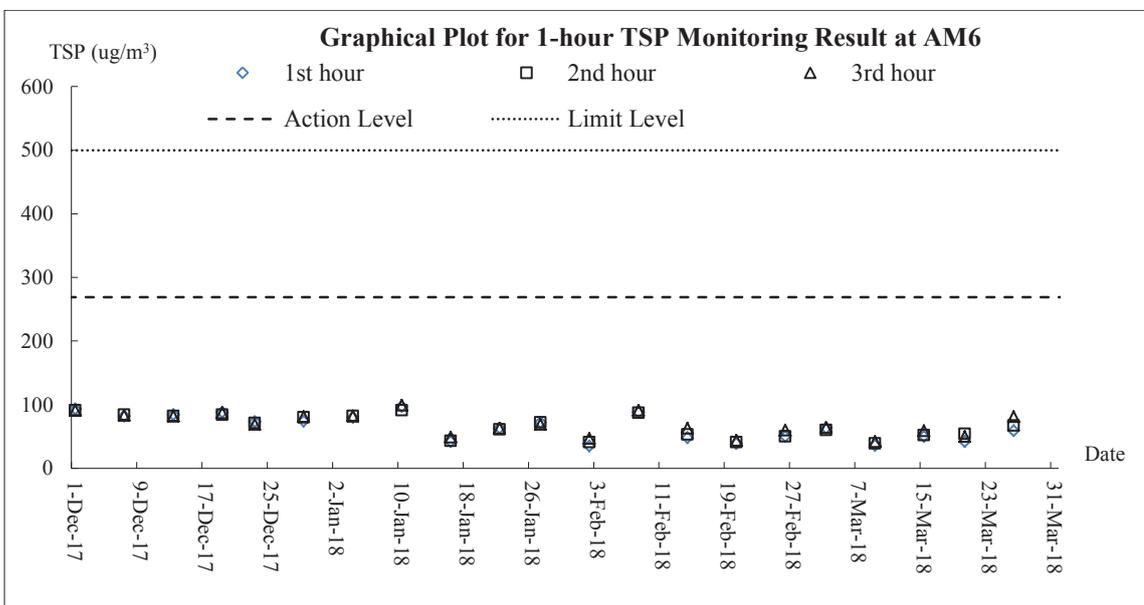
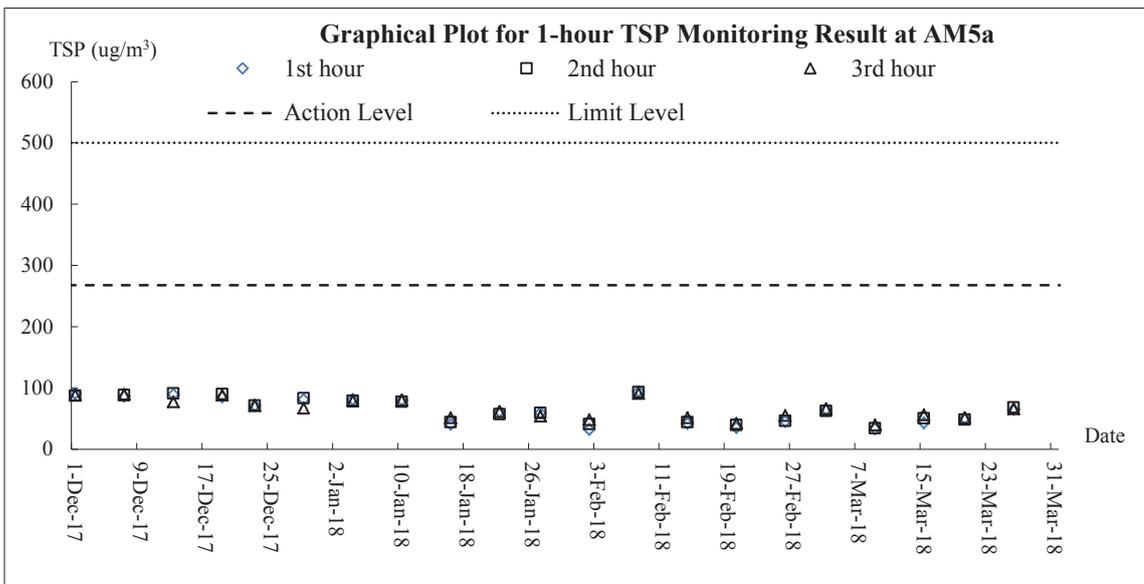
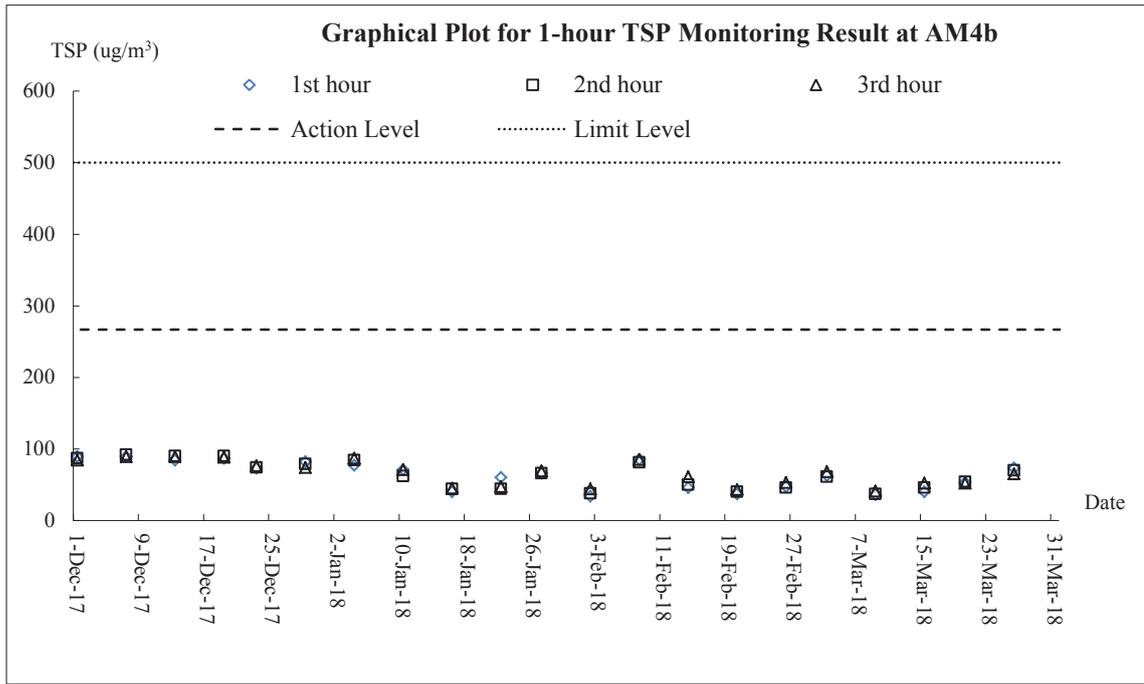


Agreement No. CE 45/2008 (CE)
 Liantang/Heung Yuen Wai Boundary Control Point and Associated Works
 Monthly Environmental Monitoring & Audit Report (No.56) – March 2018

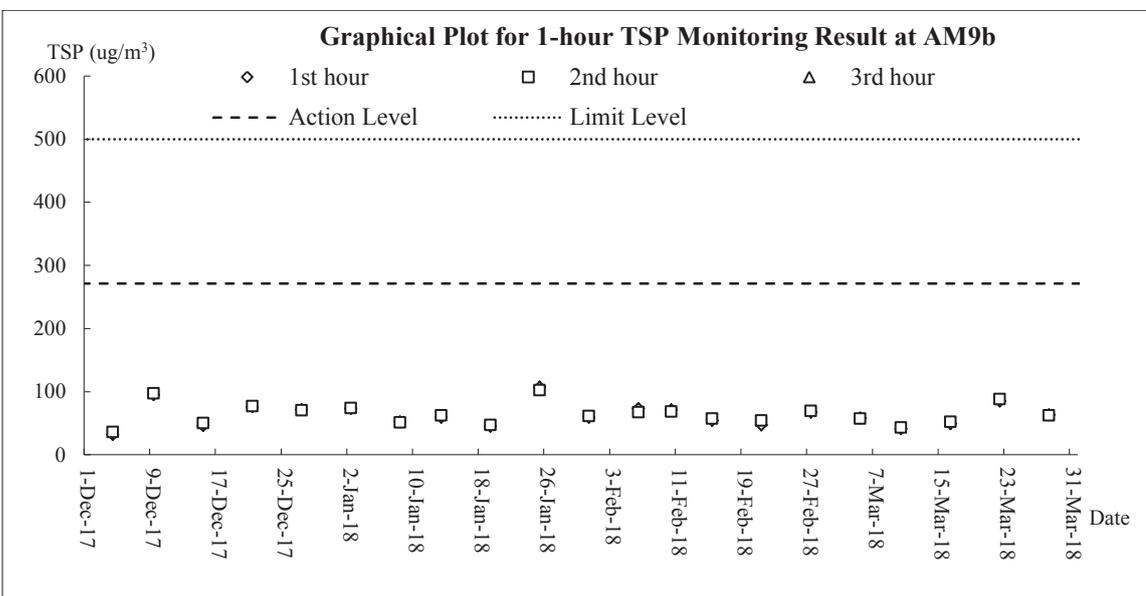
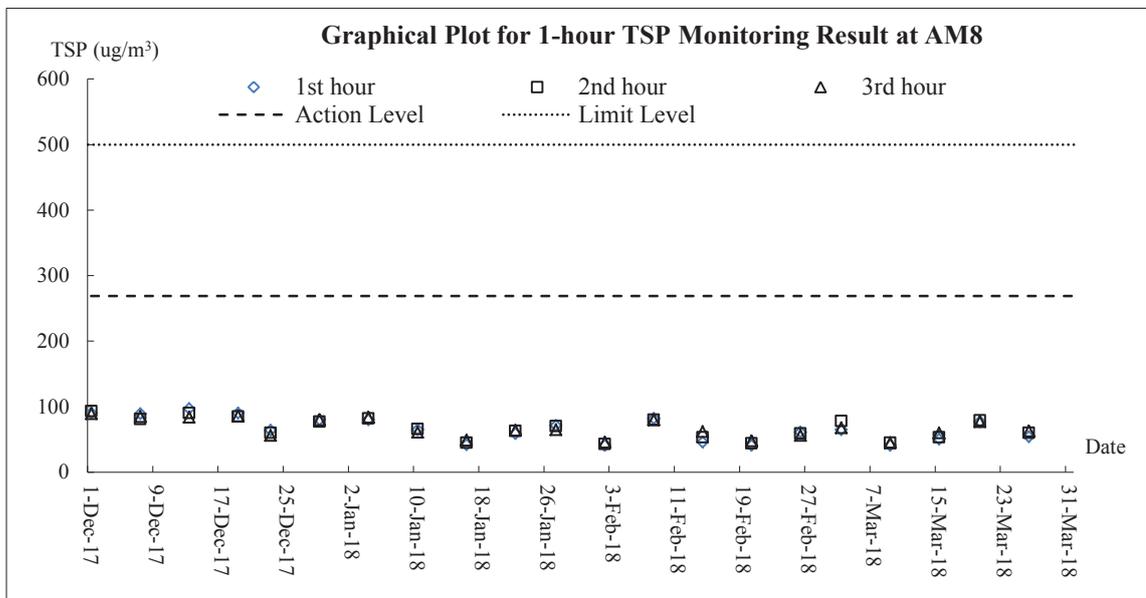
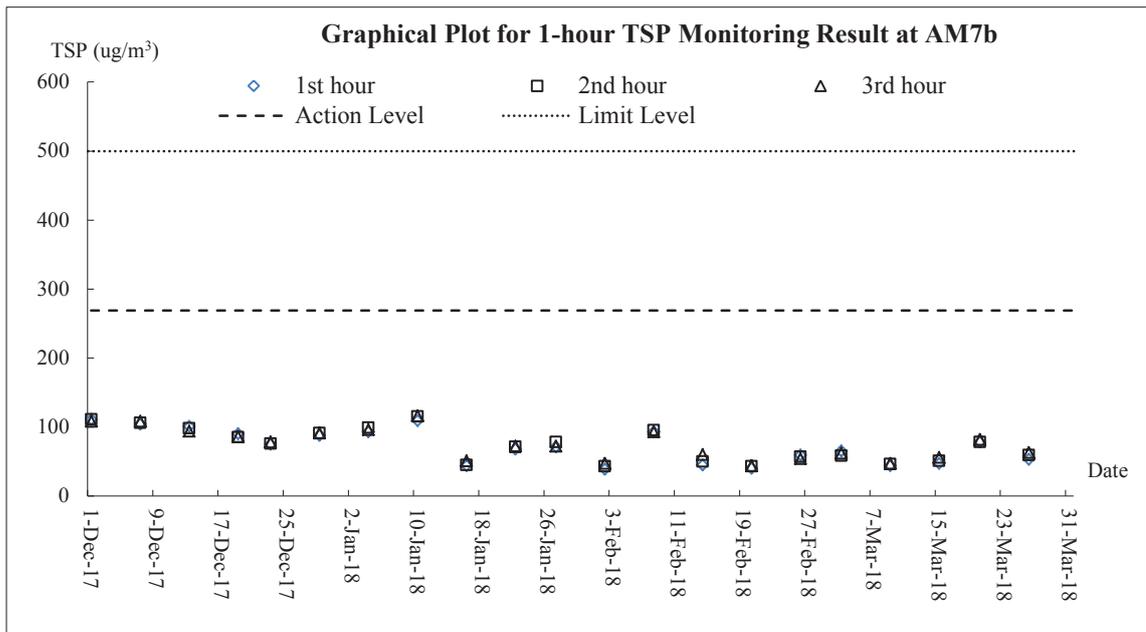


Air Quality – 24-hour TSP

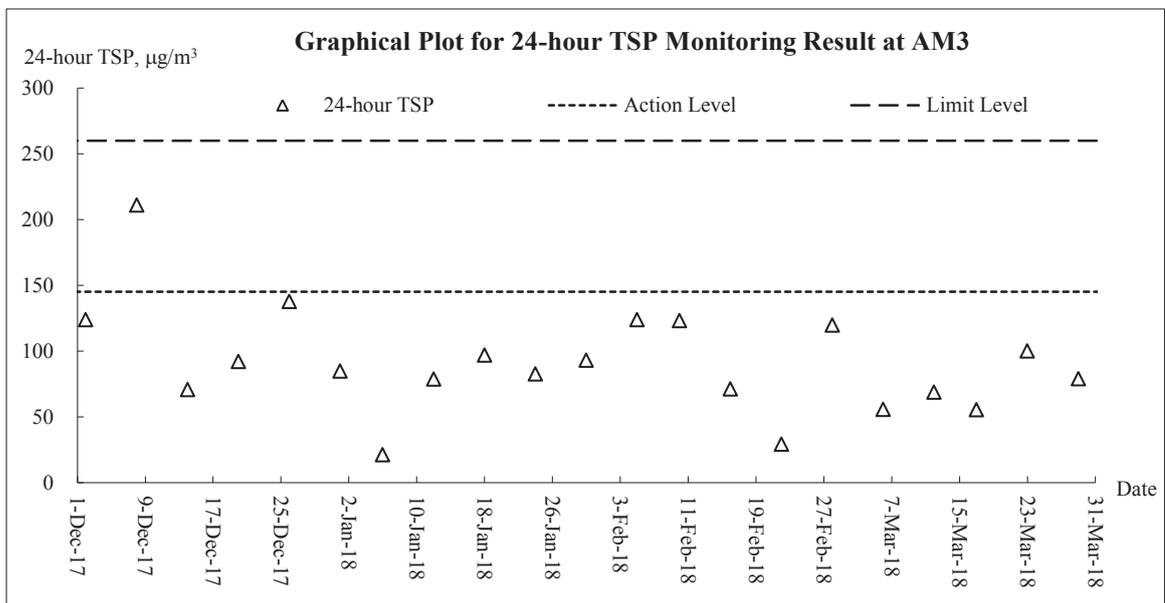
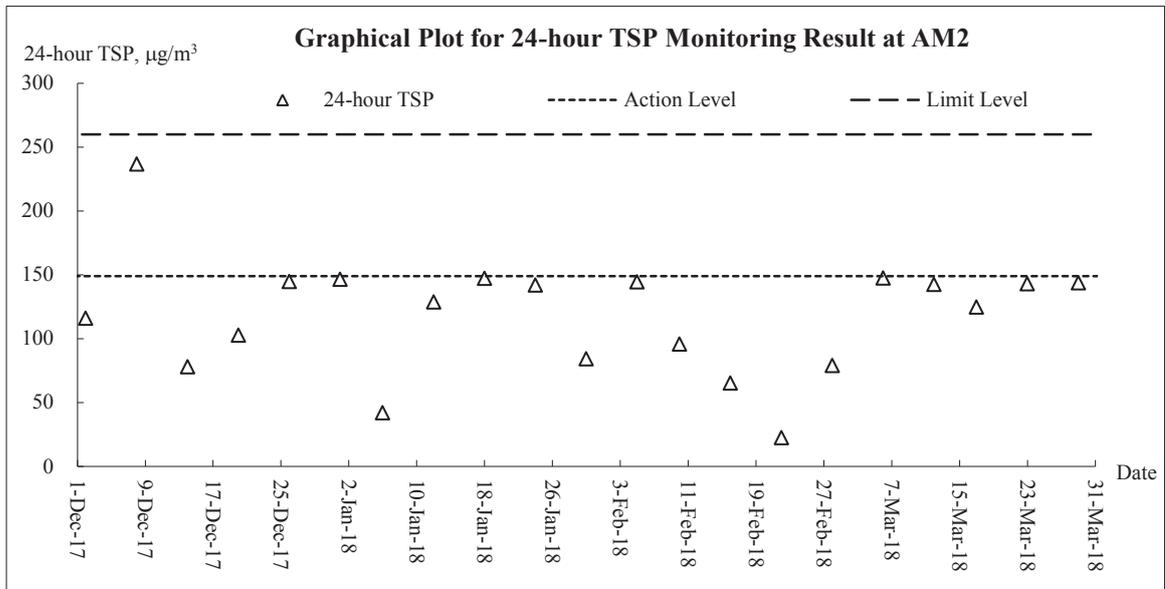
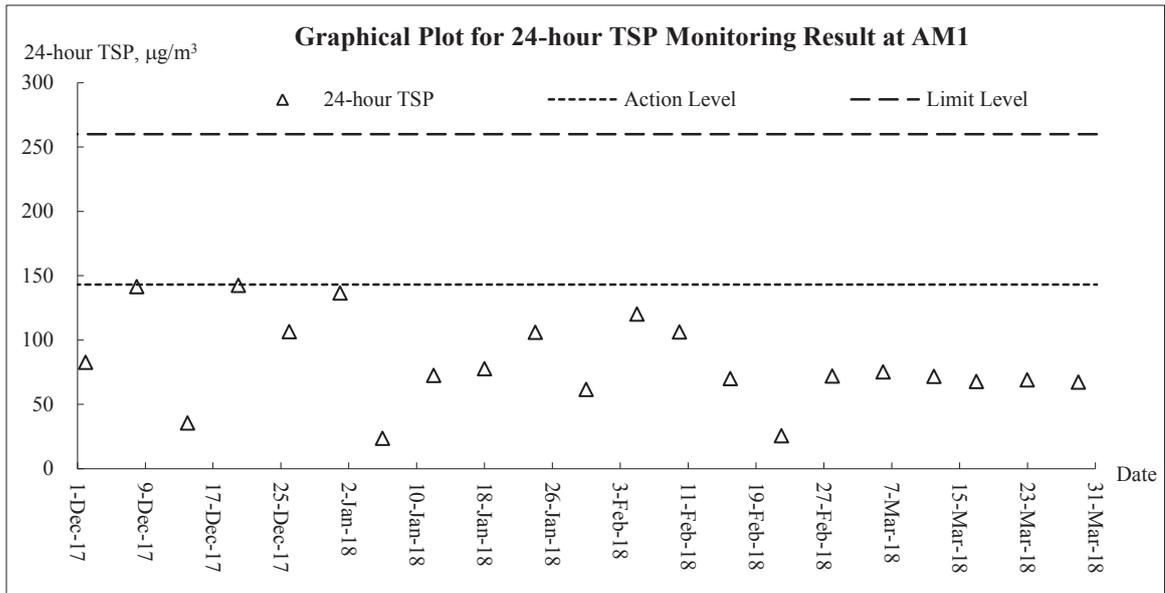


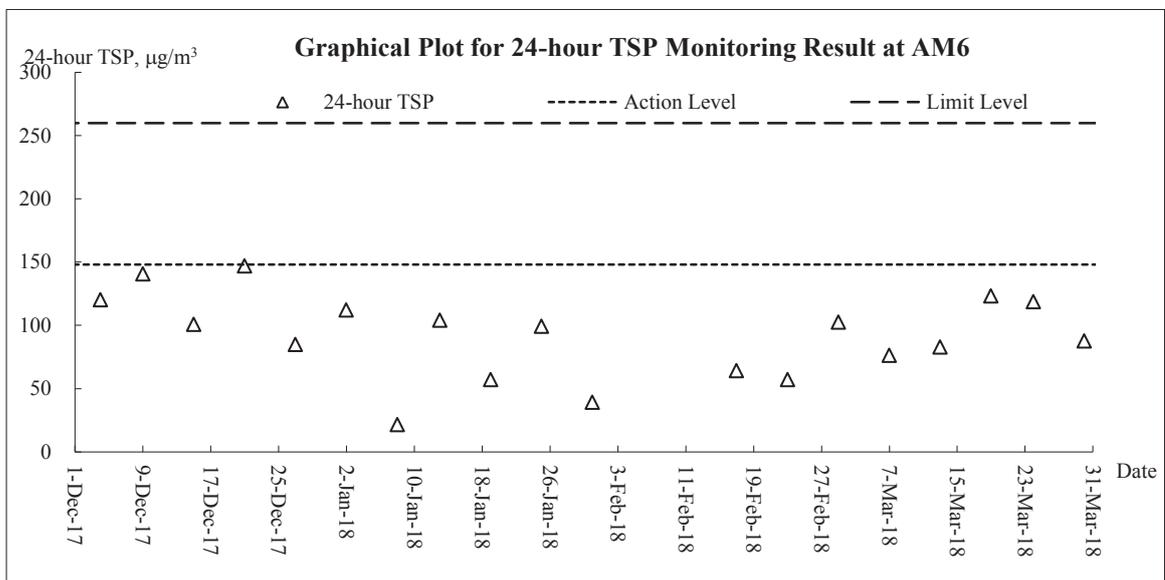
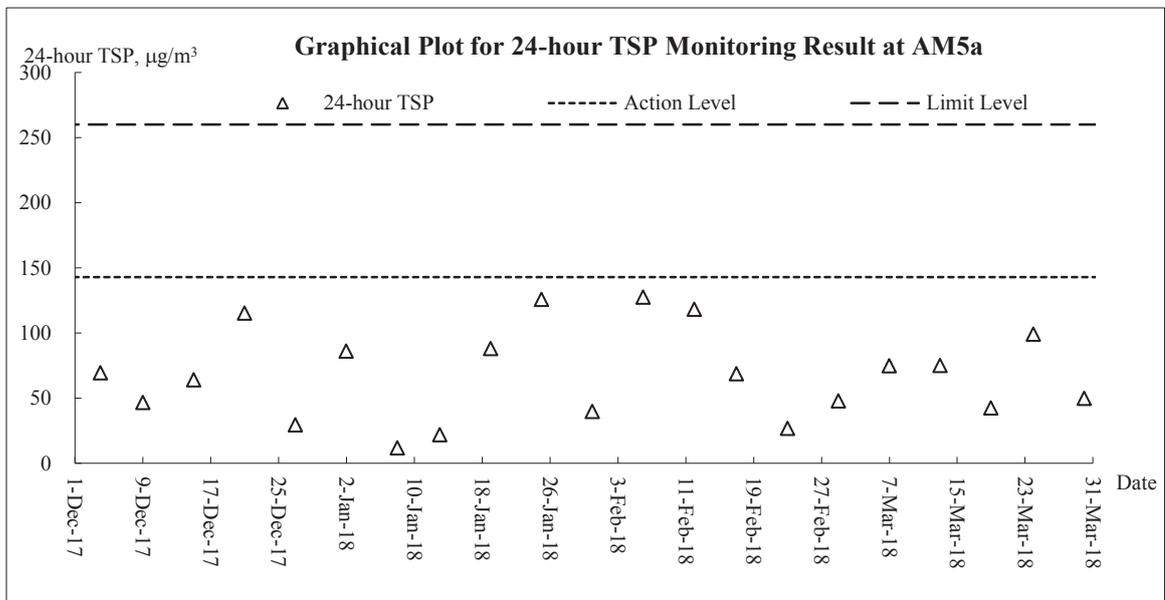
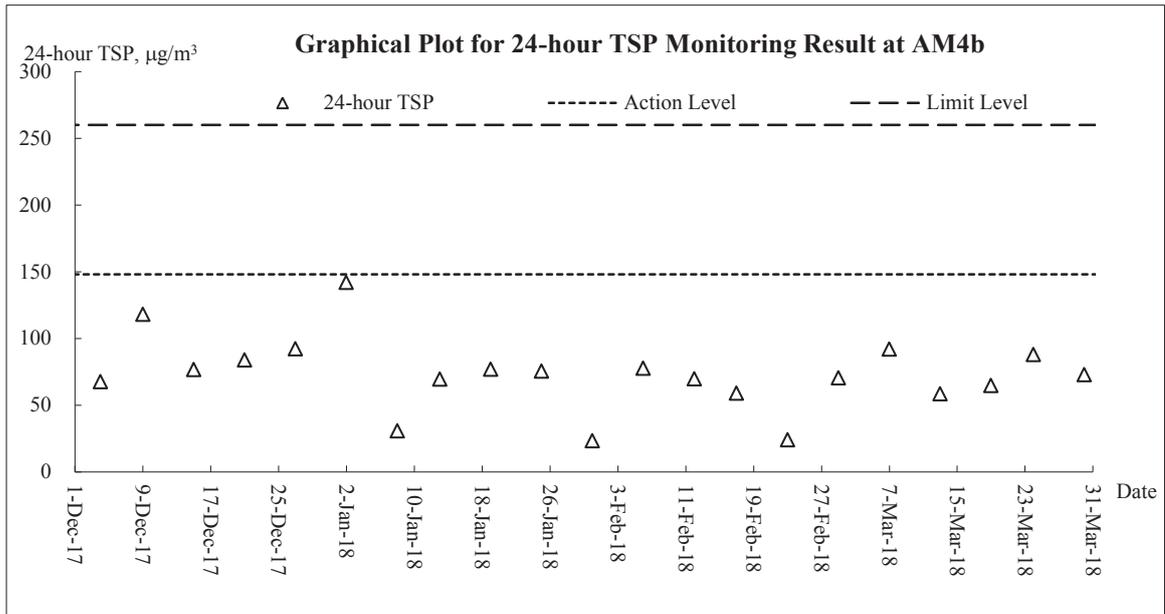





Agreement No. CE 45/2008 (CE)
 Liantang/Heung Yuen Wai Boundary Control Point and Associated Works
 Monthly Environmental Monitoring & Audit Report (No.56) – March 2018

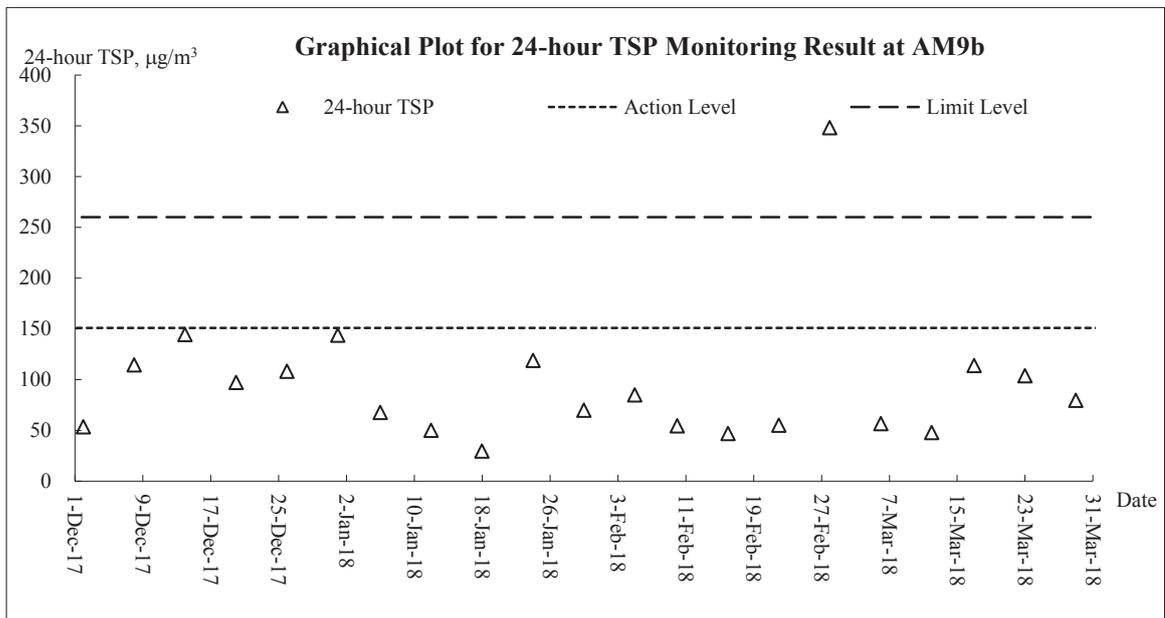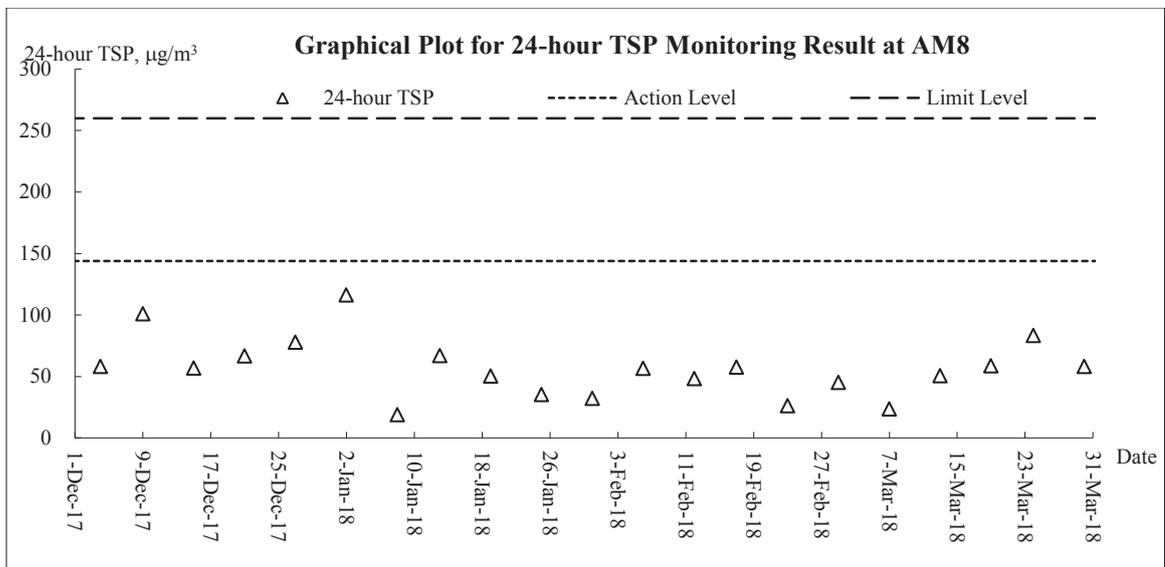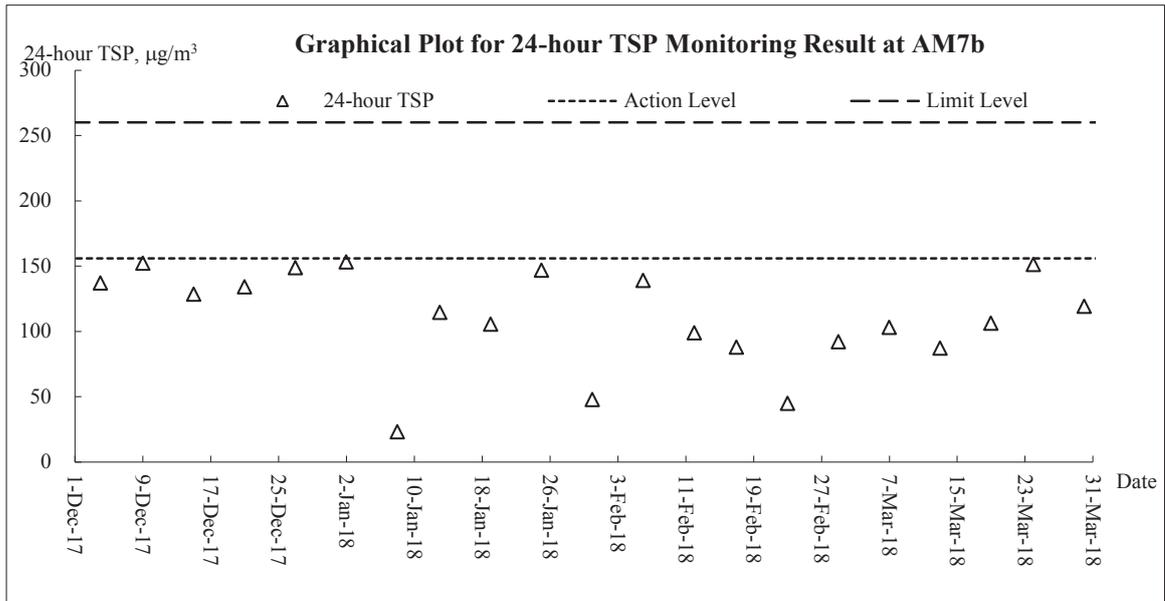


Noise

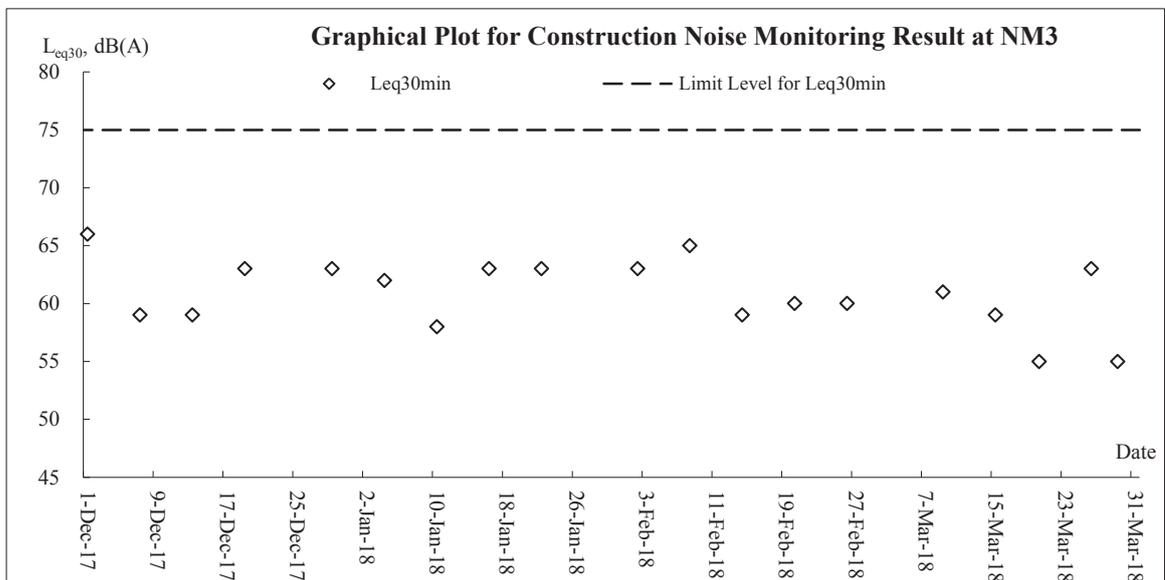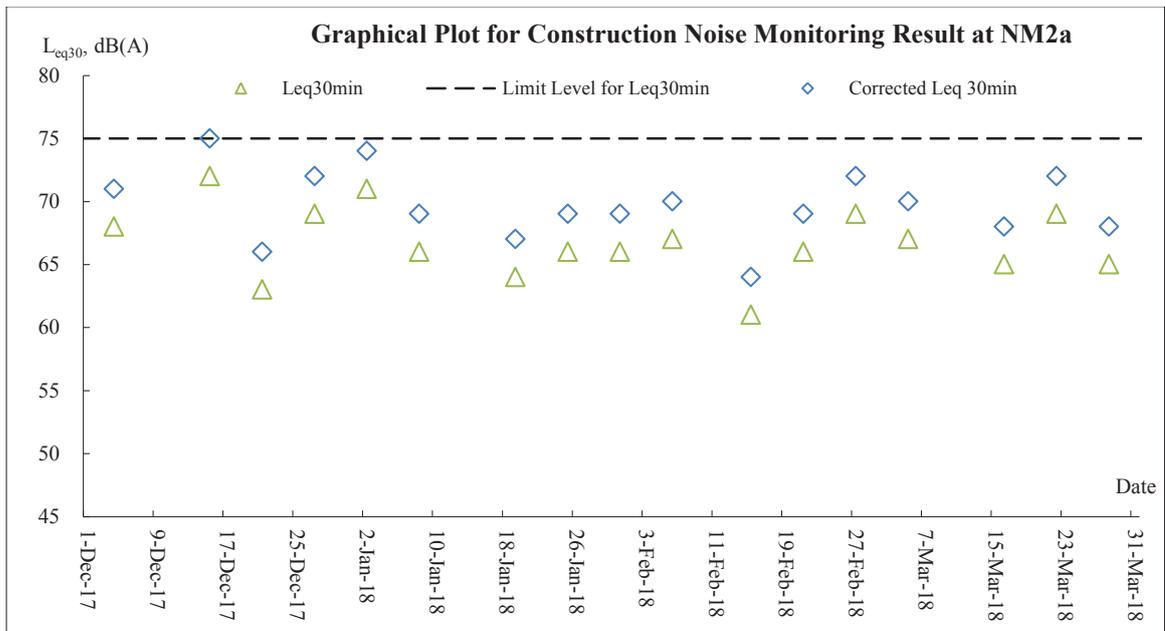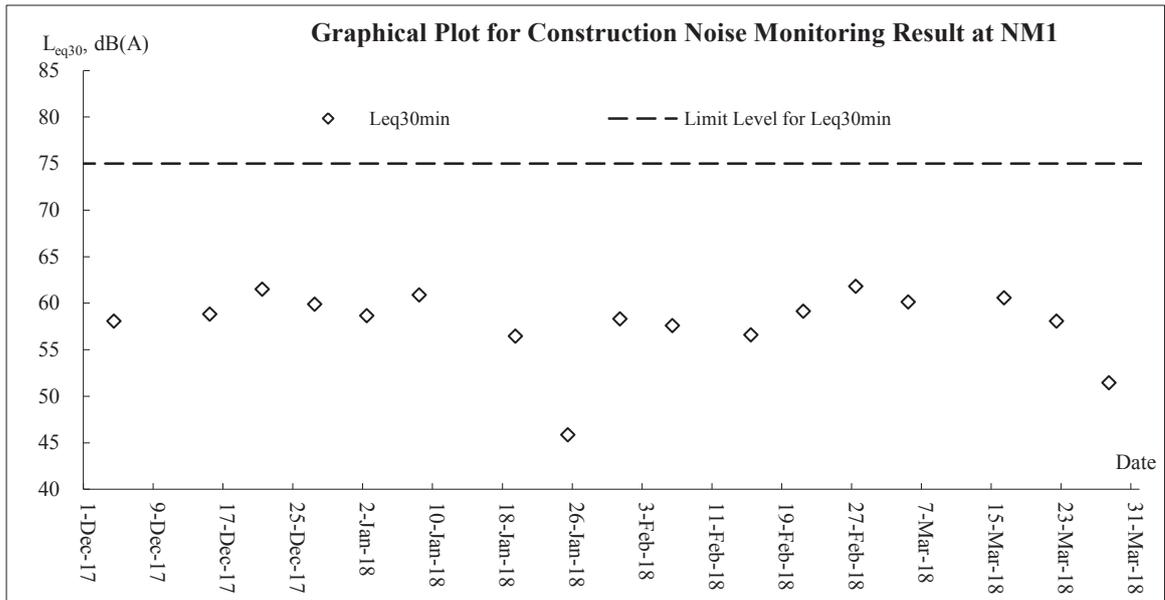

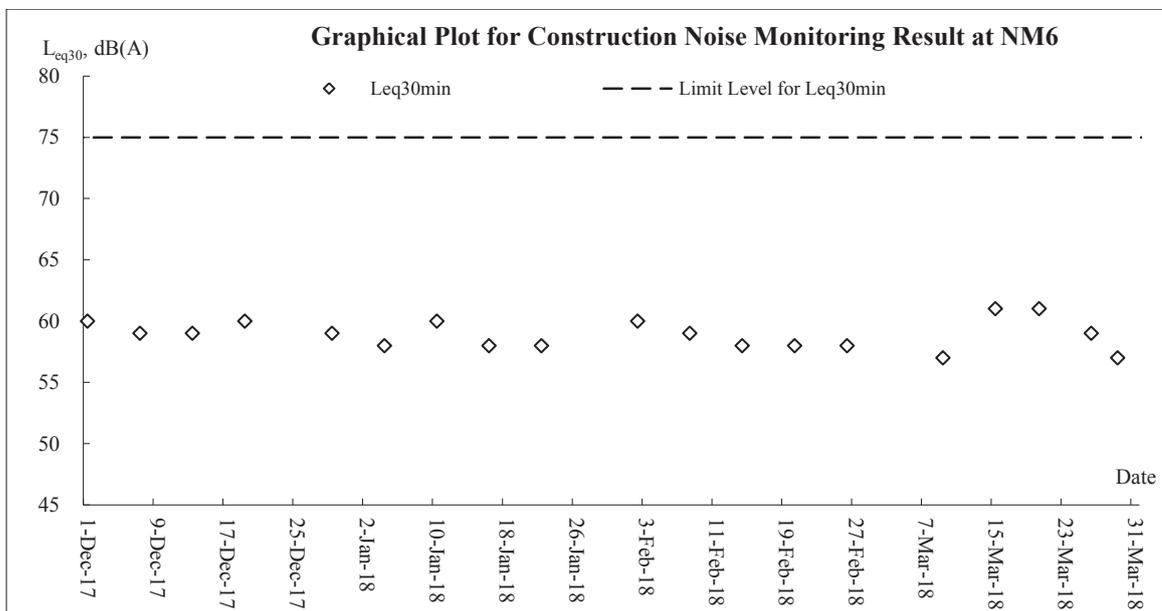
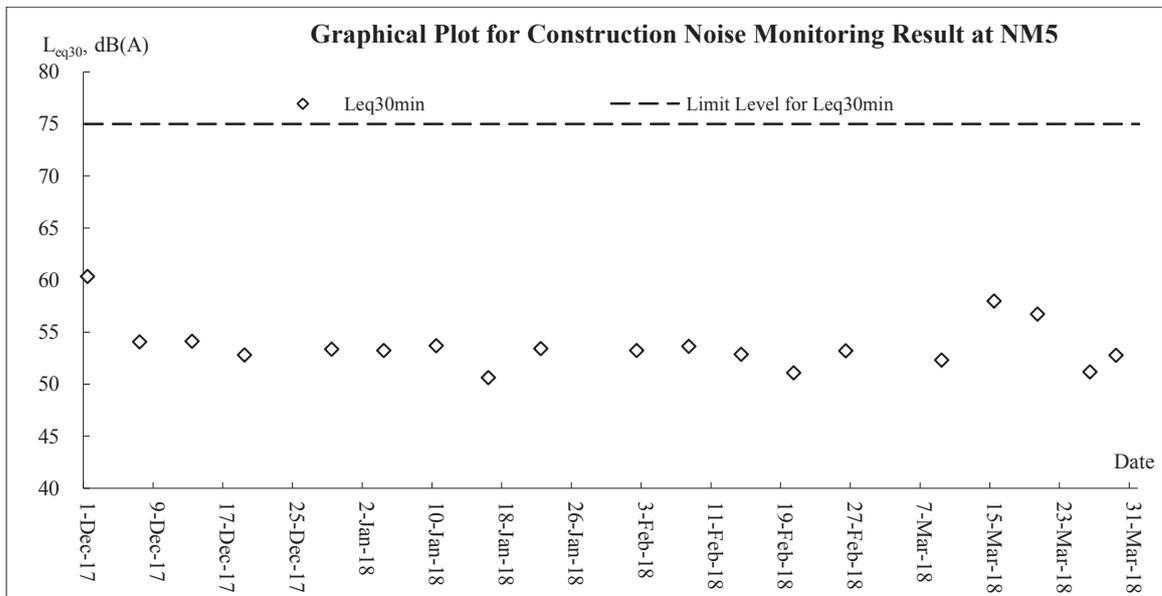
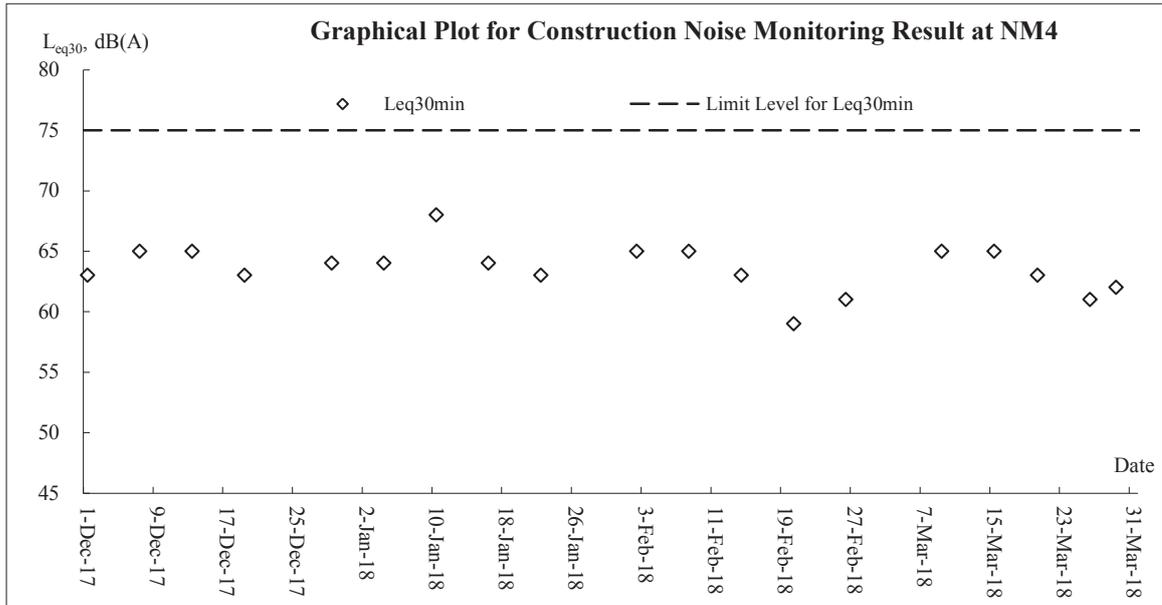


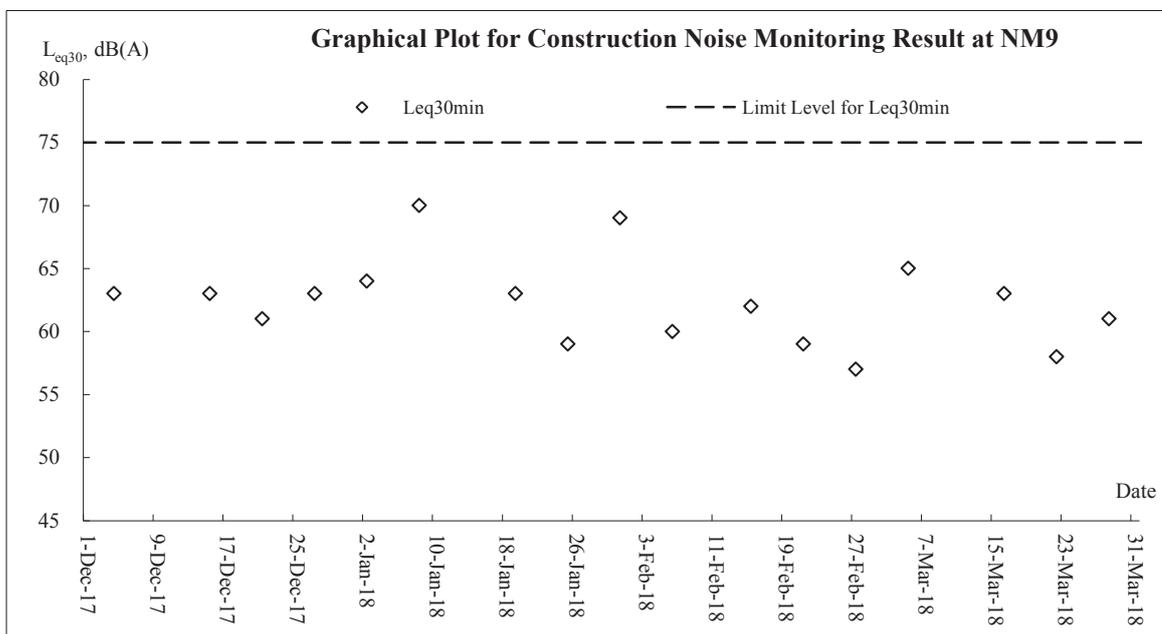
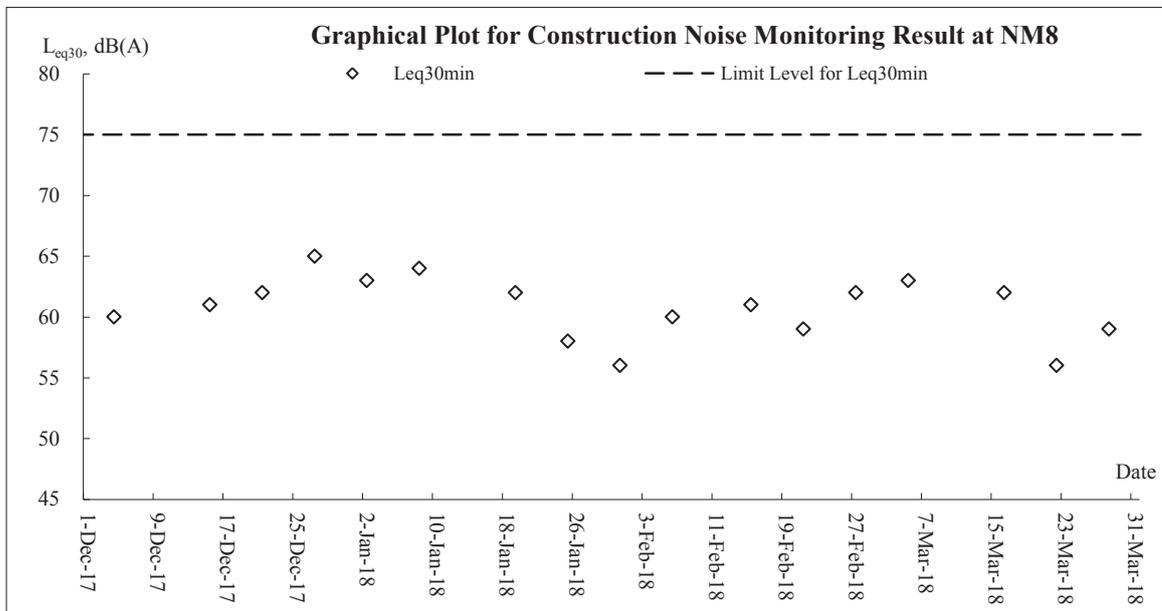
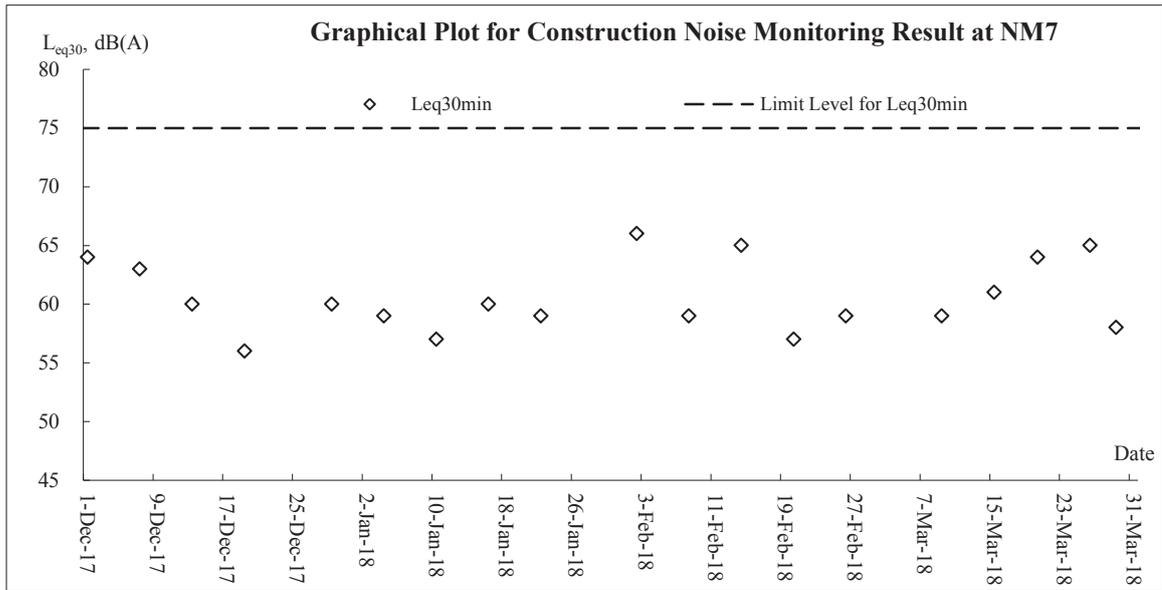





Agreement No. CE 45/2008 (CE)
 Liantang/Heung Yuen Wai Boundary Control Point and Associated Works
 Monthly Environmental Monitoring & Audit Report (No.56) – March 2018



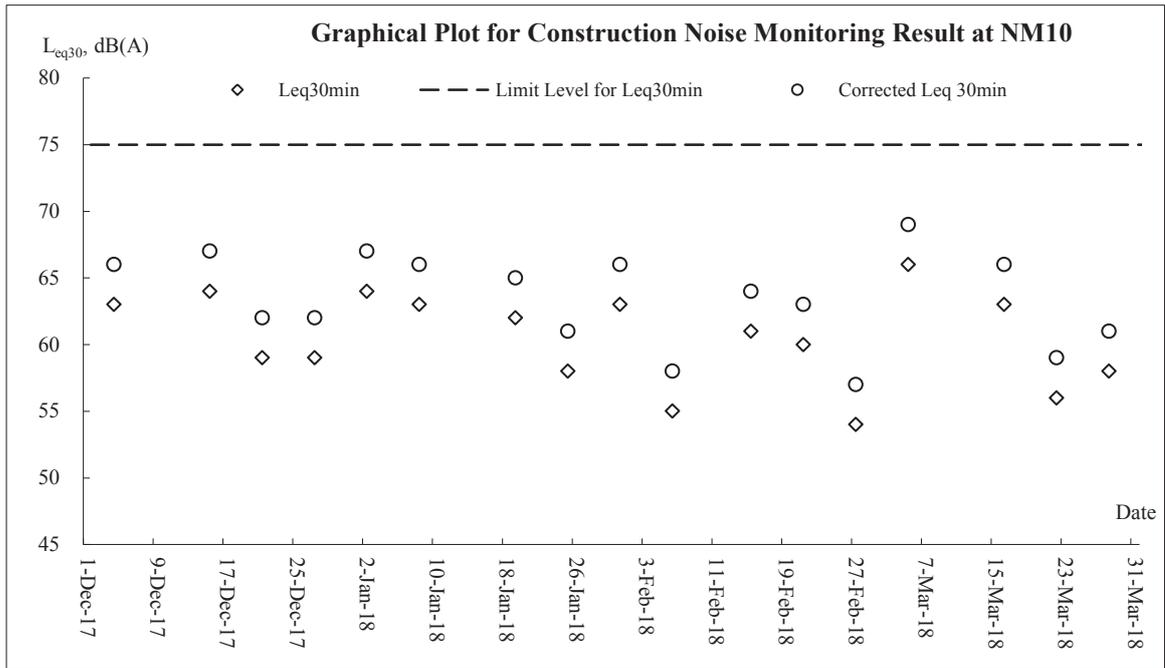


Water Quality

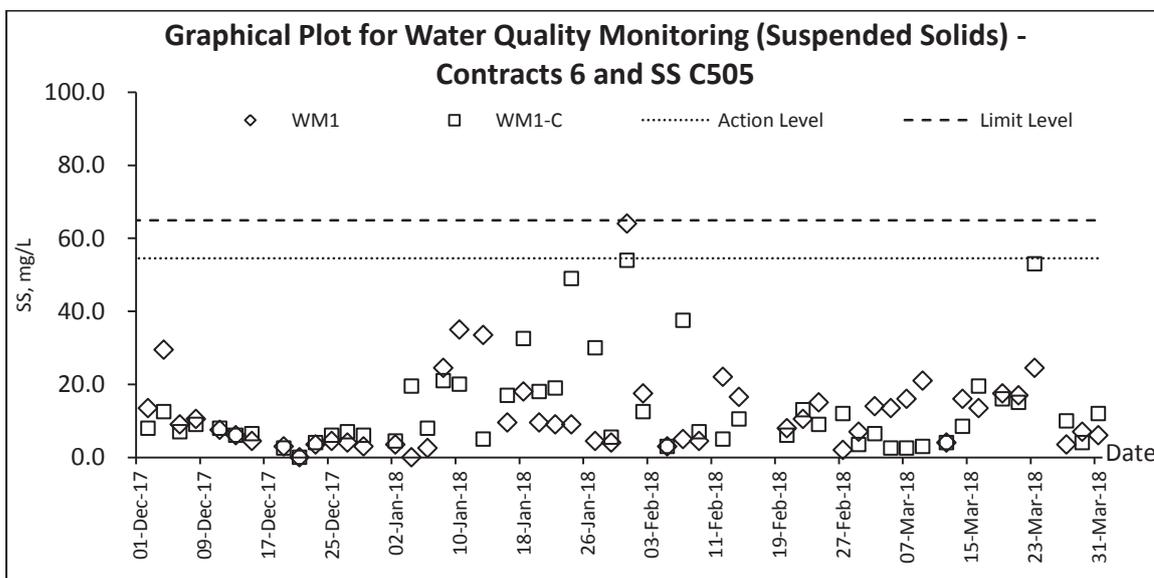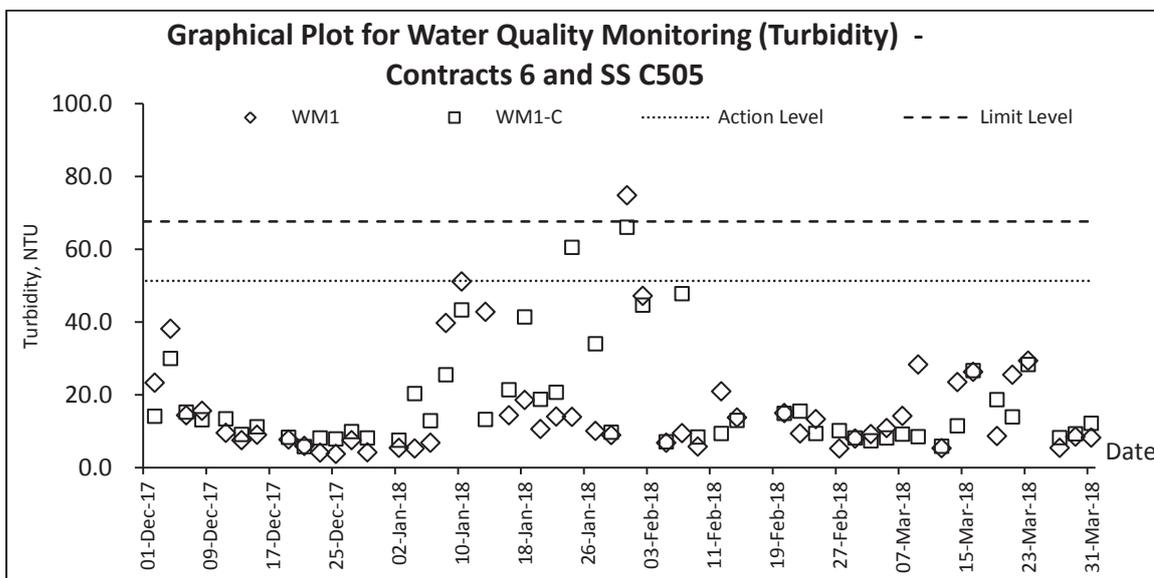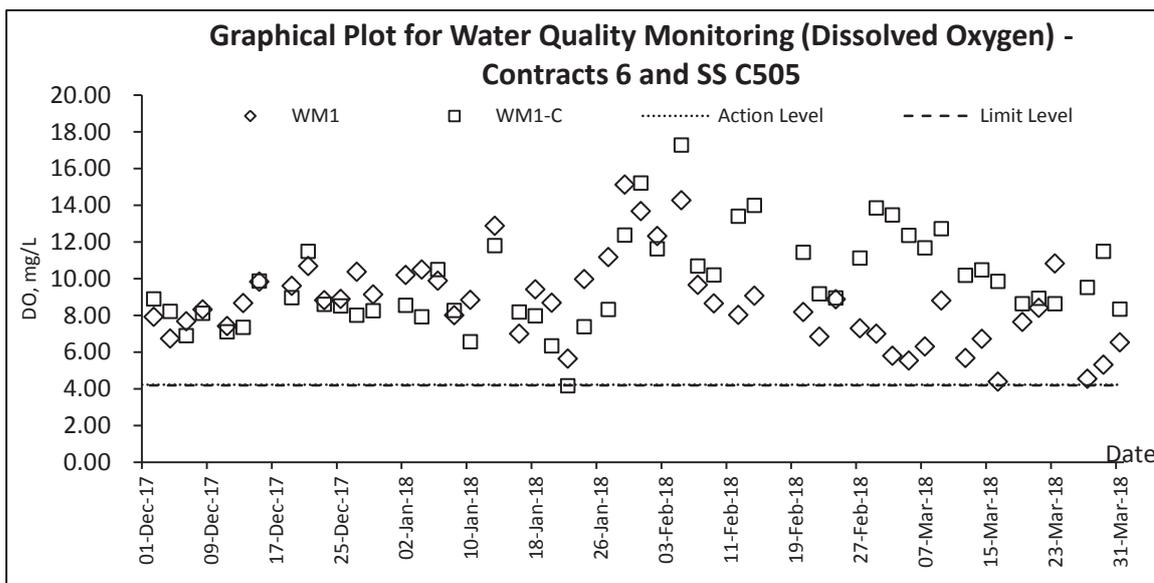

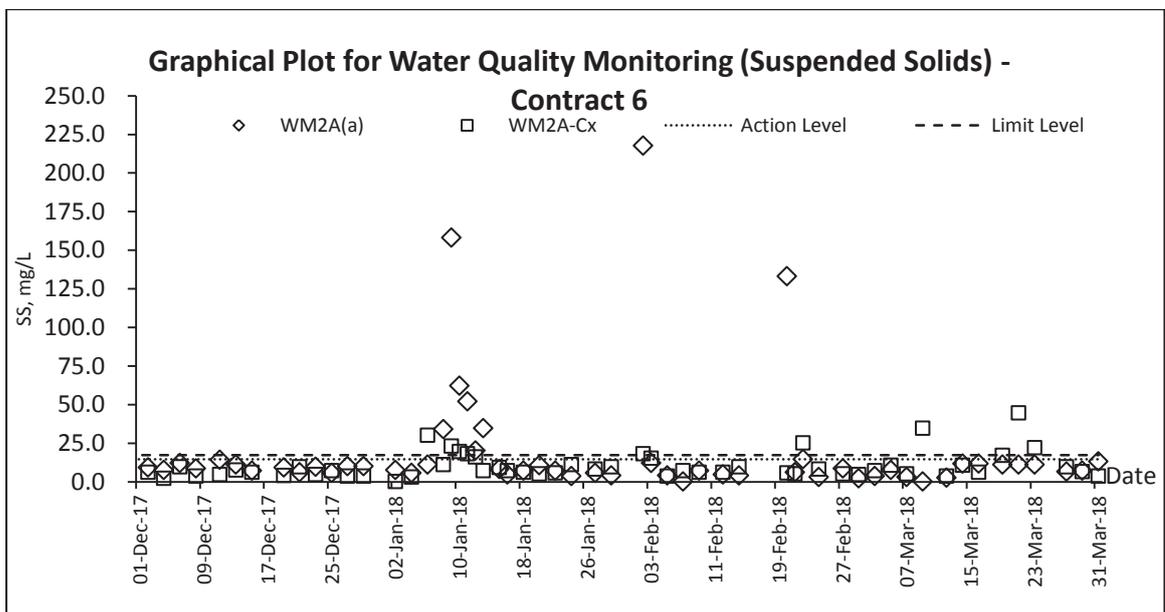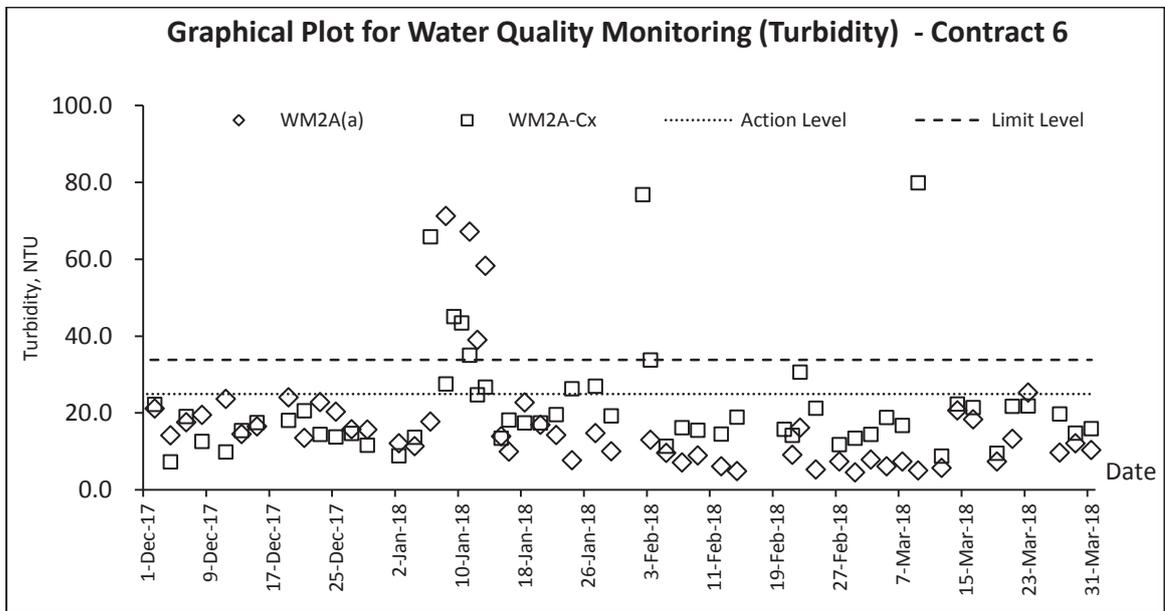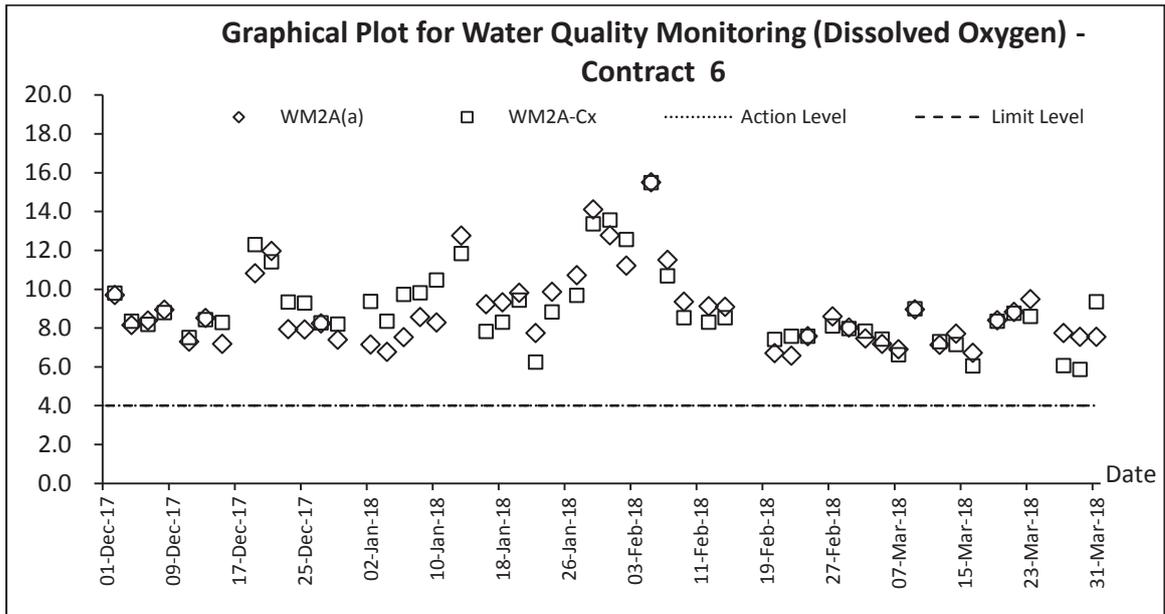

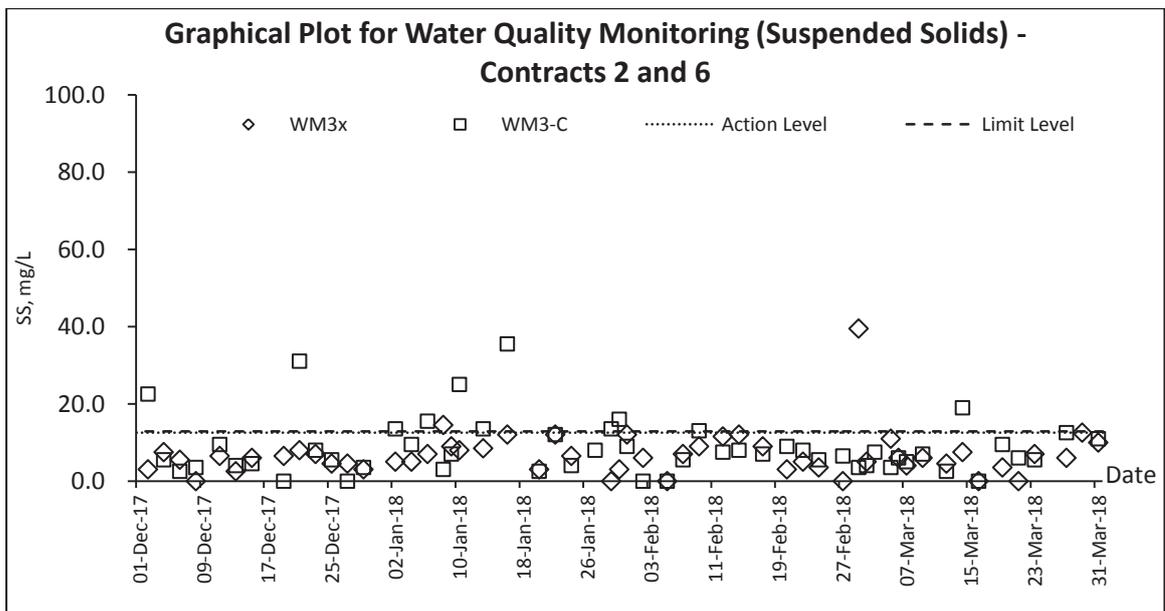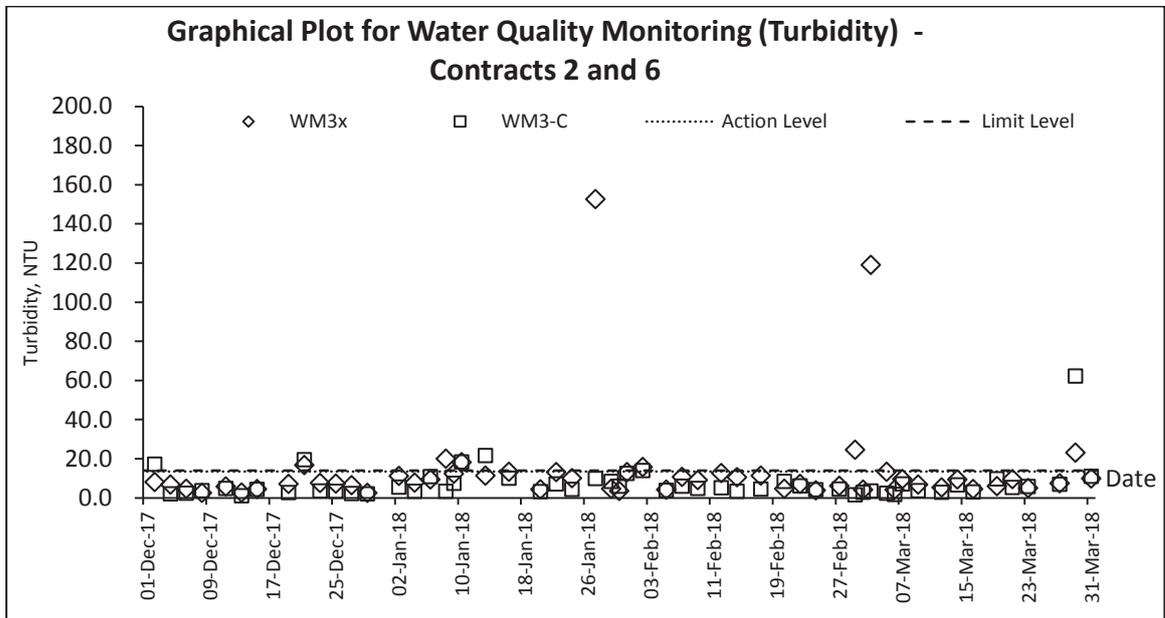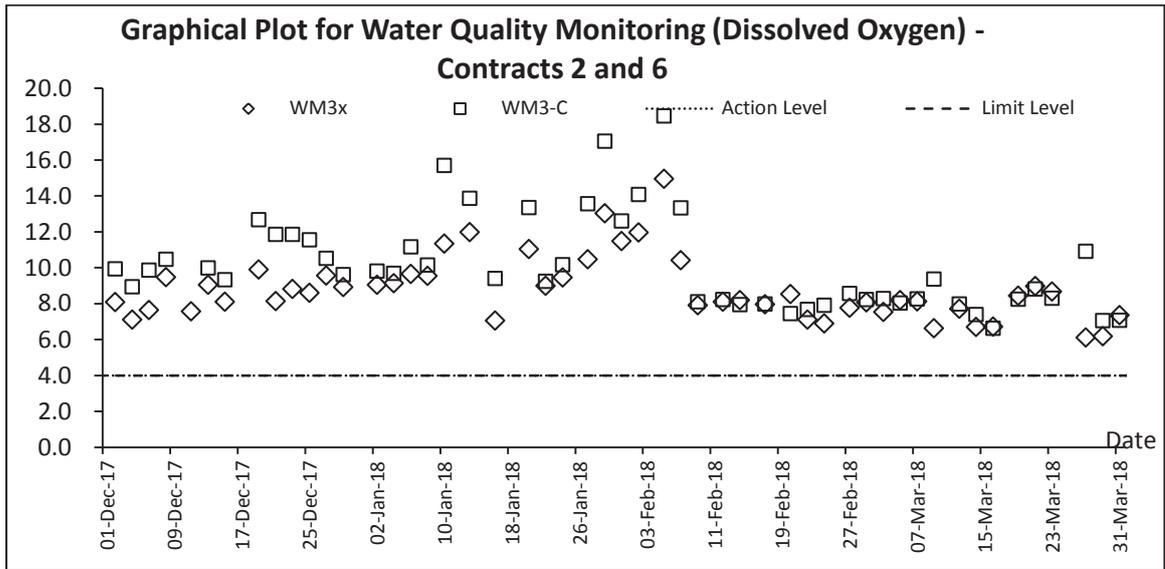

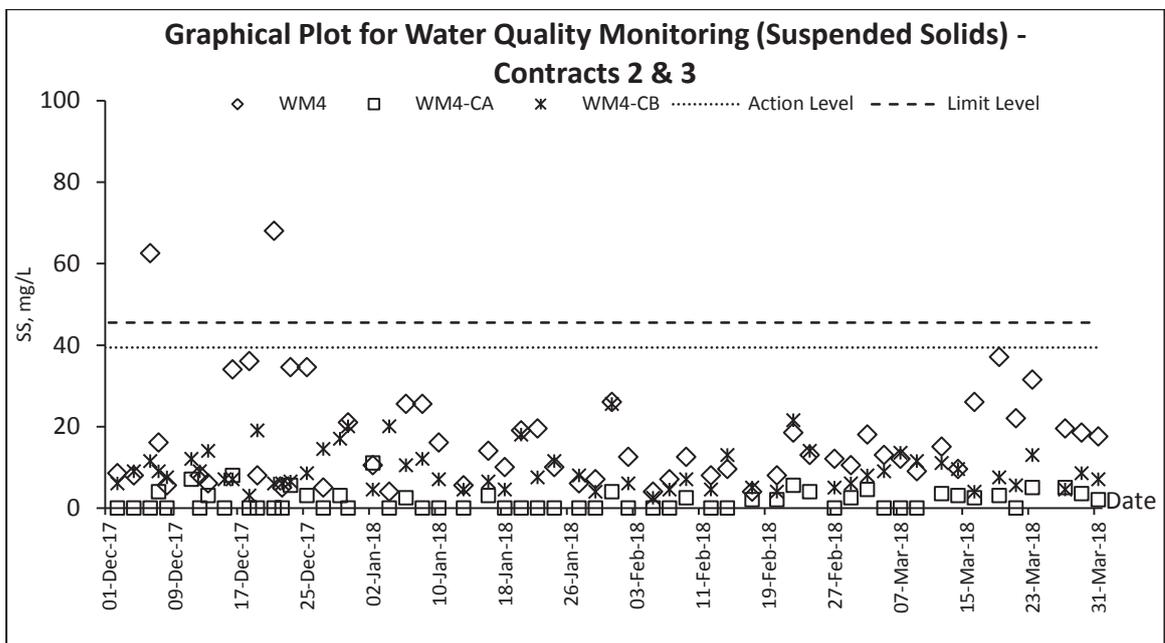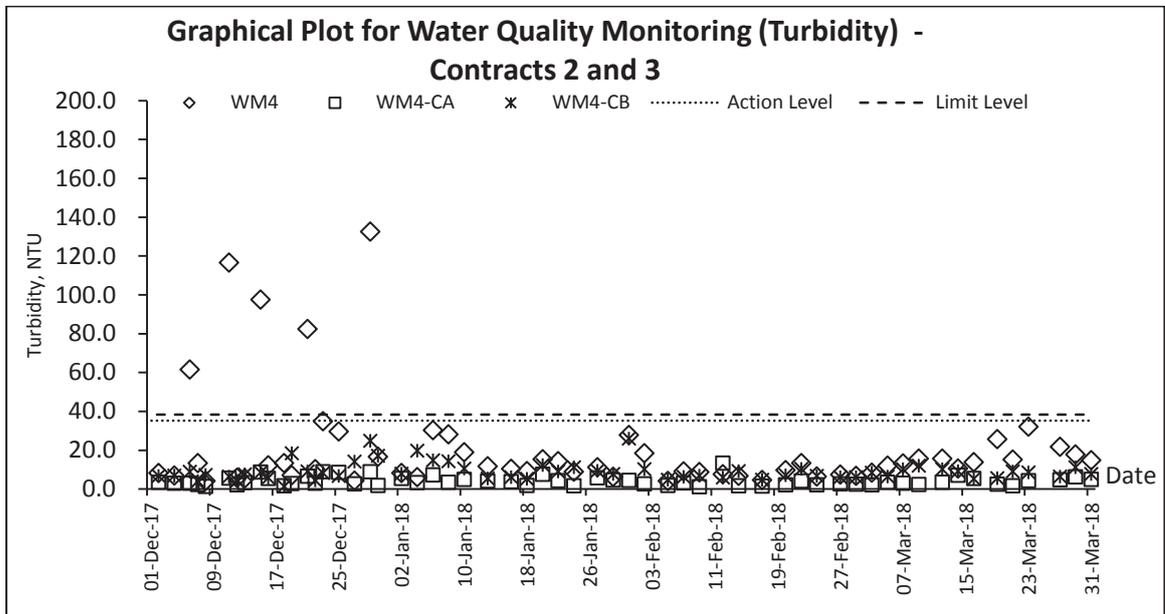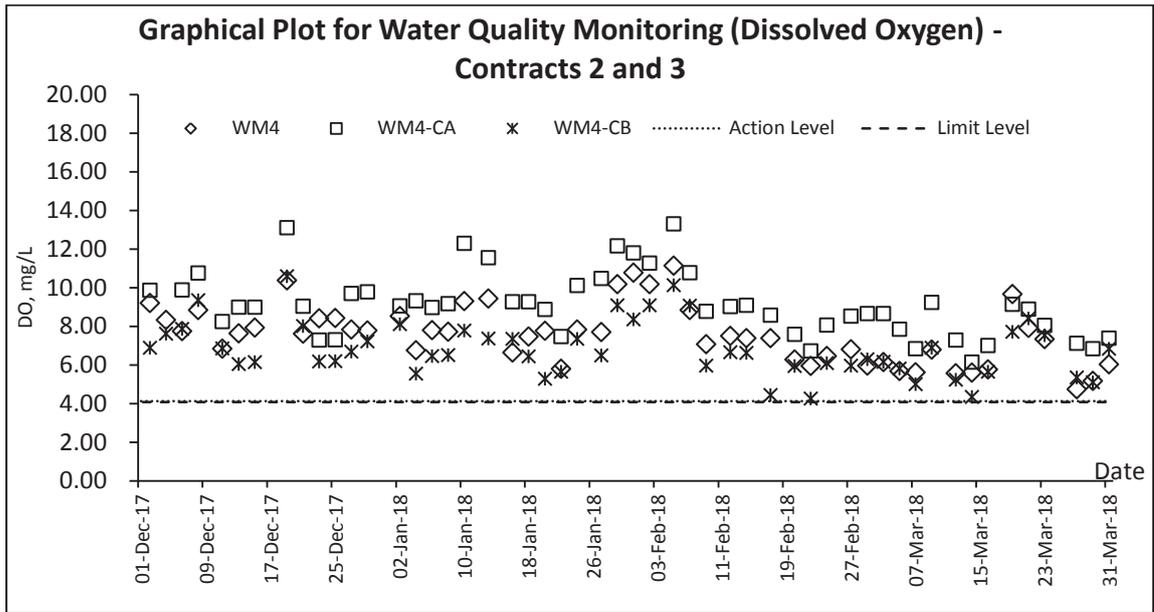

Appendix K

Meteorological Data

| Date | | Weather | Total Rainfall (mm) | Ta Kwu Ling Station | | | |
|-----------|-----|---|---------------------|---------------------|-------------------|----------------------------|----------------|
| | | | | Mean Air Temp. (°C) | Wind Speed (km/h) | Mean Relative Humidity (%) | Wind Direction |
| 1-Mar-18 | Thu | Fresh to strong easterly winds. | 0 | 21 | 9 | 81.5 | SE |
| 2-Mar-18 | Fri | Fresh to strong easterly winds. | Trace | 23.6 | 9.7 | 72.5 | E/NE |
| 3-Mar-18 | Sat | Fresh to strong easterly winds. | 0 | 23.2 | 7.9 | 81 | E |
| 4-Mar-18 | Sun | Fresh to strong easterly winds. | Trace | 23.7 | 6.6 | 88 | E |
| 5-Mar-18 | Mon | Fresh to strong easterly winds. | 0 | 25.7 | 6.5 | 77.7 | E/SE |
| 6-Mar-18 | Tue | Cloudy with one or two rain patches. | Trace | 19.8 | 10.1 | 79.2 | NE |
| 7-Mar-18 | Wed | <u>Becoming cold progressively.</u> | Trace | 19.8 | 12 | 72.5 | E/NE |
| 8-Mar-18 | Thu | Cloudy with a few rain patches. | 20.3 | 15.3 | 9.7 | 79.5 | N/NW |
| 9-Mar-18 | Fri | Fine and dry. Moderate to fresh north to northeasterly winds. | 0 | 14.3 | 11.6 | 46.2 | N/NW |
| 10-Mar-18 | Sat | Fine and dry. Moderate easterly winds. | 0 | 14.6 | 8.1 | 52.3 | E/NE |
| 11-Mar-18 | Sun | Fine and dry. Moderate easterly winds. | 0 | 17.6 | 7.5 | 56.7 | E/NE |
| 12-Mar-18 | Mon | Fine. Dry in the afternoon. Moderate easterly winds. | 0 | 19.6 | 6.9 | 69.7 | E/NE |
| 13-Mar-18 | Tue | Fine. Dry in the afternoon. Moderate easterly winds. | 0 | 20.7 | 6.4 | 73 | E/NE |
| 14-Mar-18 | Wed | Mainly cloudy with a few showers. Moderate easterly winds. | 2.4 | 19.5 | 8.2 | 82.5 | E/NE |
| 15-Mar-18 | Thu | Fine and dry. Moderate to fresh northerly winds. | Trace | 21.8 | 4.4 | 81.2 | N/NW |
| 16-Mar-18 | Fri | Fine and dry. Moderate easterly winds. | 0 | 23 | 5 | 74.5 | E |
| 17-Mar-18 | Sat | Fine and dry. Moderate easterly winds. | Trace | 20.2 | 6.9 | 79.6 | E/NE |
| 18-Mar-18 | Sun | Fine. Dry in the afternoon. Moderate easterly winds. | Trace | 21.9 | 8.6 | 82.5 | E/NE |
| 19-Mar-18 | Mon | Fine. Dry in the afternoon. Moderate easterly winds. | Trace | 22.8 | 6.9 | 83 | E/NE |
| 20-Mar-18 | Tue | Fine and dry. Moderate to fresh northerly winds. | Trace | 19 | 8.2 | 76.7 | N/NW |
| 21-Mar-18 | Wed | Fine and dry. Moderate to fresh northerly winds. | 0 | 17.8 | 10.7 | 46 | N/NW |
| 22-Mar-18 | Thu | Moderate easterly winds, fresh at times. | 0 | 16.9 | 5.3 | 62.5 | E/NE |
| 23-Mar-18 | Fri | Fine at first | 0 | 19.3 | 7.1 | 59.7 | E/NE |
| 24-Mar-18 | Sat | Fine and dry. Moderate to fresh northerly winds. | Trace | 21.1 | 7.5 | 61.3 | E/NE |
| 25-Mar-18 | Sun | Mainly cloudy with sunny periods. Moderate east to northeasterly winds. | Trace | 21.8 | 8 | 60.7 | E/NE |
| 26-Mar-18 | Mon | Sunny periods in the afternoon. Light winds. | 0 | 22.5 | 5.5 | 65.7 | E/SE |
| 27-Mar-18 | Tue | Mainly fine. Warm in the afternoon. | 0 | 22 | 6 | 73.5 | SW |
| 28-Mar-18 | Wed | Mainly fine. Warm in the afternoon. | 0 | 23.2 | 7 | 73 | E/NE |
| 29-Mar-18 | Thu | Hot and dry in the afternoon. Light winds. | 0 | 22.3 | 6.5 | 70.1 | E/NE |
| 30-Mar-18 | Fri | Mainly fine. | 0 | 24.3 | 6.9 | 72.1 | E/NE |
| 31-Mar-18 | Sat | Mainly fine. | 0 | 24.4 | 6.8 | 72.3 | E/NE |

Appendix L

Waste Flow Table

Name of Department : CEDD

Contract No./ Work Order No. : CV/2012/08

Appendix I - Monthly Summary Waste Flow Table for 2018

(All quantities shall be rounded off to 3 decimal places)

| Month | Actual Quantities of Inert C&D Materials Generated / Imported (in '000 m3) | | | | | | Actual Quantities of Other C&D Materials / Wastes Generated | | | | |
|-----------------|--|--|------------------------|--------------------------|-------------------------|-----------------------|---|----------------------------|--------------------|----------------|-----------------------------|
| | Total Quantities Generated | Broken Concrete (including rock for recycling into aggregates) | Reused in the Contract | Reused in Other Projects | Disposed as Public Fill | Imported C&D Material | Metal | Paper/ Cardboard Packaging | Plastic (Recycled) | Chemical Waste | General Refuse (in '000 m3) |
| | [a+b+c+d] | (a) | (b) | (c) | (d) | | (in '000kg) | (in '000kg) | (in '000kg) | (in '000kg) | (in '000m3) |
| January | 86.6400 | 0.0000 | 0.0000 | 5.2900 | 81.3500 | 1.6570 | 45.0000 | 0.3100 | 2.8000 | 4.5760 | 0.6575 |
| February | 33.2700 | 0.0000 | 0.0000 | 3.6700 | 29.6000 | 1.3470 | 32.0000 | 0.2500 | 2.4000 | 1.9500 | 0.2850 |
| March | 39.6460 | 0.0000 | 0.0000 | 3.3460 | 36.3000 | 1.3380 | 36.0000 | 0.3050 | 2.7000 | 9.9040 | 0.6290 |
| April | 0.0000 | | | | | | | | | | |
| May | 0.0000 | | | | | | | | | | |
| June | 0.0000 | | | | | | | | | | |
| Half-year total | 159.5560 | 0.0000 | 0.0000 | 12.3060 | 147.2500 | 4.3420 | 113.0000 | 0.8650 | 7.9000 | 16.4300 | 1.5715 |
| July | 0.0000 | | | | | | | | | | |
| August | 0.0000 | | | | | | | | | | |
| September | 0.0000 | | | | | | | | | | |
| October | 0.0000 | | | | | | | | | | |
| November | 0.0000 | | | | | | | | | | |
| December | 0.0000 | | | | | | | | | | |
| Yearly Total | 159.5560 | 0.0000 | 0.0000 | 12.3060 | 147.2500 | 4.3420 | 113.0000 | 0.8650 | 7.9000 | 16.4300 | 1.5715 |

| Year | Actual Quantities of Inert C&D Materials Generated / Imported (in '000 m3) | | | | | | Actual Quantities of Other C&D Materials / Wastes Generated | | | | |
|-------|--|--|------------------------|--------------------------|-------------------------|-----------------------|---|----------------------------|--------------------|----------------|-----------------------------|
| | Total Quantities Generated | Broken Concrete (including rock for recycling into aggregates) | Reused in the Contract | Reused in Other Projects | Disposed as Public Fill | Imported C&D Material | Metal | Paper/ Cardboard Packaging | Plastic (Recycled) | Chemical Waste | General Refuse (in '000 m3) |
| | [a+b+c+d] | (a) | (b) | (c) | (d) | | (in '000kg) | (in '000kg) | (in kg) | (in '000kg) | (in '000m3) |
| 2013 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 220.6270 | 0.0000 | 0.0000 | 0.0000 | 0.0000 |
| 2014 | 425.4406 | 0.0000 | 2.7362 | 376.3945 | 46.3099 | 5.6245 | 3.2100 | 0.4390 | 0.0070 | 10.8800 | 2.2609 |
| 2015 | 570.9459 | 0.0000 | 20.8159 | 543.2162 | 6.9138 | 4.5492 | 37.6310 | 3.9220 | 11.9700 | 16.1920 | 1.1696 |
| 2016 | 905.0989 | 0.0000 | 7.4372 | 427.7834 | 469.8783 | 24.8350 | 430.5200 | 3.8500 | 18.7262 | 34.2936 | 1.9720 |
| 2017 | 741.9482 | 0.0000 | 8.0385 | 175.6792 | 558.2305 | 78.3865 | 1681.8000 | 4.0700 | 30.5175 | 48.7906 | 5.9610 |
| 2018 | 159.5560 | 0.0000 | 0.0000 | 12.3060 | 147.2500 | 4.3420 | 113.0000 | 0.8650 | 7.9000 | 16.4300 | 1.5715 |
| Total | 2802.9896 | 0.0000 | 39.0278 | 1535.3794 | 1228.5825 | 117.7372 | 2486.7880 | 13.1460 | 69.1207 | 126.5862 | 12.9350 |

Remark:

1) Density of C&D material to be 2.2 metric ton/m3
2) Density of General Refuse to be 1.6 metric ton/m3

3) Density of Spent Oil to be 0.88 metric ton/m3

(All quantities rounded off to 3 decimal places)

Monthly Summary Waste Flow Table for 2018 (year)

| Month | Actual Quantities of Inert C&D Materials Generated Monthly | | | | | | Actual Quantities of C&D Wastes Generated Monthly | | | | |
|------------------|--|-------------------------------------|--------------------------|--------------------------|--------------------------|--------------------------|---|----------------------------|--------------------------|----------------------|-----------------------------|
| | Total Quantity Generated | Hard Rock and Large Broken Concrete | Reused in the Contract | Reused in other Projects | Disposed as Public Fill | Imported Fill | Metals | Paper/ cardboard packaging | Plastics | Chemical Waste | Others, e.g. general refuse |
| | (in '000m ³) | (in '000m ³) | (in '000m ³) | (in '000m ³) | (in '000m ³) | (in '000m ³) | (in '000m ³) | (in '000m ³) | (in '000m ³) | (in m ³) | (in '000m ³) |
| Jan | 3.089 | 0.304 | 0.060 | 0.000 | 2.725 | 0.923 | 0.000 | 0.000 | 0.000 | 0.000 | 0.150 |
| Feb | 2.697 | 0.256 | 0.150 | 0.000 | 2.292 | 1.144 | 0.000 | 0.000 | 0.000 | 0.000 | 0.095 |
| Mar | 1.524 | 0.141 | 0.120 | 0.000 | 1.263 | 0.211 | 0.000 | 0.000 | 0.000 | 0.000 | 0.085 |
| Apr | | | | | | | | | | | |
| May | | | | | | | | | | | |
| Jun | | | | | | | | | | | |
| Sub-total | 7.310 | 0.701 | 0.330 | 0.000 | 6.279 | 2.278 | 0.000 | 0.000 | 0.000 | 0.000 | 0.330 |
| Jul | | | | | | | | | | | |
| Aug | | | | | | | | | | | |
| Sep | | | | | | | | | | | |
| Oct | | | | | | | | | | | |
| Nov | | | | | | | | | | | |
| Dec | | | | | | | | | | | |
| Total | 7.310 | 0.701 | 0.330 | 0.000 | 6.279 | 2.278 | 0.000 | 0.000 | 0.000 | 0.000 | 0.330 |

- Note:**
1. Assume the density of soil fill is 2 ton/m³.
 2. Assume the density of rock and broken concrete is 2.5 ton/m³.
 3. Assume each truck of C&D wastes is 5m³.
 4. The inert C&D materials except slurry and bentonite are disposed at Tuen Mun 38.
 5. The slurry and bentonite are disposed at Tseung Kwun O 137.
 6. The non-inert C&D wastes are disposed at NENT.
 7. Assume the density of metal is 7,850 kg/m³.
 8. Assume the density of plastic is 941 kg/m³.
 9. Assume the density of paper is 800 kg/m³.

| Forecast of Total Quantities of C&D Materials to be Generated from the Contract | | | | | | | | | | |
|---|-------------------------------------|--------------------------|--------------------------|--------------------------|--------------------------|--------------------------|----------------------------|--------------------------|--------------------------|-----------------------------|
| Total Quantity Generated | Hard Rock and Large Broken Concrete | Reused in the Contract | Reused in other Projects | Diposal as Public Fill | Imported Fill | Metals | Paper/card board packaging | Plastics (see Note 3) | Chemical Waste | Others, e.g. general refuse |
| (in '000m ³) | (in '000m ³) | (in '000m ³) | (in '000m ³) | (in '000m ³) | (in '000m ³) | (in '000m ³) | (in '000m ³) | (in '000m ³) | (in '000m ³) | (in '000m ³) |
| 52.5 | 5.2 | 12.3 | 0.0 | 35.0 | 41.8 | 5.0 | 1.0 | 1.0 | 0.5 | 44.8 |

- Notes:
- (1) The performance targets are given in PS Clause 6(14).
 - (2) The waste flow table shall also include C&D materials that are specified in the Contract to be imported for use at the Site.
 - (3) Plastics refer to plastic bottles/containers, plastic sheets/foam from packaging material.
 - (4) The Contractor shall also submit the latest forecast of the total amount of C&D materials expected to be generated from the Works, together with a breakdown of the nature where the total amount of C&D materials expected to be generated from the Works if equal to or exceed 50,000 m³.

SUMMARY TABLE FOR WORK PROCESSES OR ACTIVITIES REQUIRING TIMBER FOR TEMPORARY WORKS

Contract No.: CV/2012/09

Contract Title: Liantang /Heung Yuen Wai Boundary Control Point Site Formation and Infrastructure Works - Contract 3

| Item No. | Description of Works Process or Activity [see note (a) below] | Justifications for Using Timber in Temporary Construction Works | Est. Quantities of Timber Used (m³) | Actual Quantities Used (m³) | Remarks |
|-----------------|--|--|---|---|----------------|
| 1 | Formwork for Construction of Retaining Wall NB67 | Easy handling by manpower | 81.85 | 81.85 | |
| | | Total Estimated Quantity of Timber Used | 81.85 | | |

- Notes:
- (a) The Contractor shall list out all the work items requiring timber for use in temporary construction works. Several minor work items may be grouped into one for ease of updating.
 - (b) The summary table shall be submitted to the Engineer's Representative monthly together with the Waste Flow Table for review and monitoring in accordance with the PS Clause 25.24(11)..

Name of Department: CEDD

Contract No.: NE/2014/02

Monthly Summary Waste Flow Table for 2018

| Month | Actual Quantities of Inert C&D Materials Generated Monthly | | | | | | Actual Quantities of C&D Wastes Generated Monthly | | | | |
|--------|--|-------------------------------------|--------------------------|--------------------------|--------------------------|--------------------------|---|----------------------------|-----------------------|----------------|-----------------------------|
| | Total Quantity Generated | Hard Rock and Large Broken Concrete | Reused in the Contract | Reused in other Projects | Disposed as Public Fill | Imported Fill | Metals | Paper/ cardboard packaging | Plastics (see Note 3) | Chemical Waste | Others, e.g. general refuse |
| | (in '000m ³) | (in '000m ³) | (in '000m ³) | (in '000m ³) | (in '000m ³) | (in '000m ³) | (in '000 kg) | (in '000kg) | (in '000kg) | (in '000kg) | (in '000m ³) |
| 2016 | 0.000 | 0.000 | 0.000 | 0.000 | 0.000 | 0.000 | 0.000 | 0.000 | 0.000 | 0.000 | 0.000 |
| 2016 | 0.000 | 0.000 | 0.000 | 0.000 | 0.000 | 0.000 | 0.000 | 0.000 | 0.000 | 0.000 | 0.000 |
| Jan-18 | 0.000 | 0.000 | 0.000 | 0.000 | 0.000 | 0.000 | 0.000 | 0.000 | 0.000 | 0.000 | 0.000 |
| Feb-18 | 0.000 | 0.000 | 0.000 | 0.000 | 0.000 | 0.000 | 0.000 | 0.000 | 0.000 | 0.000 | 0.000 |
| Mar-18 | 0.000 | 0.000 | 0.000 | 0.000 | 0.000 | 0.000 | 0.000 | 0.000 | 0.000 | 0.000 | 0.000 |
| Apr-18 | | | | | | | | | | | |
| May-18 | | | | | | | | | | | |
| Jun-18 | | | | | | | | | | | |
| Jul-18 | | | | | | | | | | | |
| Aug-18 | | | | | | | | | | | |
| Sep-18 | | | | | | | | | | | |
| Oct-18 | | | | | | | | | | | |
| Nov-18 | | | | | | | | | | | |
| Dec-18 | | | | | | | | | | | |
| Total | 0.000 | 0.000 | 0.000 | 0.000 | 0.000 | 0.000 | 0.000 | 0.000 | 0.000 | 0.000 | 0.000 |

| Forecast of Total Quantities of C&D Materials to be Generated from the Contract* | | | | | | | | | | |
|--|-------------------------------------|--------------------------|--------------------------|--------------------------|--------------------------|--------------|----------------------------|-----------------------|----------------|-----------------------------|
| Total Quantity Generated | Hard Rock and Large Broken Concrete | Reused in the Contract | Reused in other Projects | Disposed as Public Fill | Imported Fill | Metals | Paper/ cardboard packaging | Plastics (see Note 3) | Chemical Waste | Others, e.g. general refuse |
| (in '000m ³) | (in '000m ³) | (in '000m ³) | (in '000m ³) | (in '000m ³) | (in '000m ³) | (in '000 kg) | (in '000kg) | (in '000kg) | (in '000kg) | (in '000m ³) |
| 0.500 | 0.000 | 0.000 | 0.000 | 0.500 | 0.000 | 0.500 | 0.200 | 0.000 | 0.000 | 0.200 |

Notes :

- (1) The performance targets are given in PS Clause 1.84(14).
- (2) The waste flow table shall also include C&D materials that are specified in the Contract to be imported for use at the Sites.
- (3) Plastics refer to plastic bottles/containers, plastic sheets/foam from packaging materials.
- (4) Estimate 6m³ capacity per dump truck

Monthly Summary Waste Flow Table for 2018 (year)

Name of Person completing the record: K.M. Lui (EO)

Project : Liangtang / Heung Yuen Wai Boundary Control Point Site Formation and Infrastructure Works – Contract 6

Contract No.: CV/2013/08

| Month | Actual Quantities of Inert C&D Materials Generated Monthly | | | | | | Actual Quantities of C&D Wastes Generated Monthly | | | | |
|-----------|--|-------------------------------------|--------------------------|--------------------------|--------------------------|--------------------------|---|----------------------------|--------------------------|----------------|-----------------------------|
| | Total Quantity Generated | Hard Rock and Large Broken Concrete | Reused in the Contract | Reused in other Projects | Disposed as Public Fill | Imported Fill | Metals | Paper/ cardboard packaging | Plastics (see Note 3) | Chemical Waste | Others, e.g. general refuse |
| | (in '000m ³) | (in '000m ³) | (in '000m ³) | (in '000m ³) | (in '000m ³) | (in '000m ³) | (in '000 kg) | (in '000kg) | (in '000kg) | (in '000kg) | (in '000 m ³) |
| Jan | 4.152 | 0 | 0.629 | 1.947 | 1.576 | 0 | 0 | 0.240 | 0 | 0 | 0.892 |
| Feb | 2.740 | 0 | 0.867 | 0.544 | 1.329 | 0 | 0 | 0.402 | 0 | 0 | 0.578 |
| Mar | 3.269 | 0 | 1.581 | 0.969 | 0.719 | 0 | 0 | 0.380 | 0 | 0 | 0.725 |
| Apr | | | | | | | | | | | |
| May | | | | | | | | | | | |
| Jun | | | | | | | | | | | |
| Sub-total | 10.161 | 0.000 | 3.077 | 3.460 | 3.624 | 0.000 | 0.000 | 1.022 | 0.000 | 0.000 | 2.195 |
| Jul | | | | | | | | | | | |
| Aug | | | | | | | | | | | |
| Sep | | | | | | | | | | | |
| Oct | | | | | | | | | | | |
| Nov | | | | | | | | | | | |
| Dec | | | | | | | | | | | |
| Total | 1008.555 | 0.000 | 166.304 | 274.103 | 568.149 | 53.939 | 0.000 | 7.401 | 0.007 | 34.045 | 10.946 |

- Notes:
- (1) The waste flow table shall also include C&D materials that are specified in the Contract to be imported for use at the Site.
 - (2) Plastics refer to plastic bottles/containers, plastic sheets/ foam from packaging materials.
 - (3) Broken concrete for recycling into aggregates.

MONTHLY SUMMARY WASTE FLOW TABLEName of Department: CEDD Contract Title: Liantang/ Heung Yuen Wai Boundary Control Point
Site Formation and Infrastructure Works – Contract 7 Contract No.: NE/2014/03 **Monthly Summary Waste Flow Table for 2018 (year)**

| Month | Actual Quantities of Inert C&D Materials Generated Monthly | | | | | | Actual Quantities of Non-Inert C&D Wastes Generated Monthly | | | | |
|-----------|--|-------------------------------------|--------------------------|--------------------------|--------------------------|--------------------------|---|---------------------------|----------------------|----------------|-----------------------------|
| | Total Quantity Generated | Hard Rock and Large Broken Concrete | Reused in the Contract | Reused in other Projects | Disposed as Public Fill | Imported Fill | Metals | Paper/cardboard packaging | Plastic (see Note 3) | Chemical Waste | Others, e.g. general refuse |
| | (in '000m ³) | (in '000m ³) | (in '000m ³) | (in '000m ³) | (in '000m ³) | (in '000m ³) | (in '000kg) | (in '000kg) | (in '000kg) | (in '000kg) | (in '000m ³) |
| Jan | 0.015 | 0 | 0 | 0 | 0.015 | 0 | 14.5 | 0.5 | 0.001 | 0 | 0.15 |
| Feb | 0 | 0 | 0 | 0 | 0 | 0 | 9 | 0.18 | 0.001 | 0 | 0.13 |
| Mar | 0.005 | 0 | 0 | 0 | 0.005 | 0 | 6 | 0.15 | 0.001 | 0 | 0.2 |
| Apr | | | | | | | | | | | |
| May | | | | | | | | | | | |
| June | | | | | | | | | | | |
| Sub-total | 0.02 | 0 | 0 | 0 | 0.02 | 0 | 29.5 | 0.83 | 0.003 | 0 | 0.48 |
| July | | | | | | | | | | | |
| Aug | | | | | | | | | | | |
| Sept | | | | | | | | | | | |
| Oct | | | | | | | | | | | |
| Nov | | | | | | | | | | | |
| Dec | | | | | | | | | | | |
| Total | 0.02 | 0 | 0 | 0 | 0.02 | 0 | 29.5 | 0.83 | 0.003 | 0 | 0.480 |

Notes: (1) The waste flow table shall also include C&D materials that are specified in the Contract to be imported for use at the Site.
(2) Plastics refer to plastic bottles/containers, plastic sheets/foam from packaging material.

Contract No. / Works Order No.: - SSC505**Monthly Summary Waste Flow Table for 2018** [year] [to be submitted not later than the 15th day of each month following reporting month]

(All quantities shall be rounded off to 3 decimal places.)

| Month | Actual Quantities of Inert Construction Waste Generated Monthly | | | | |
|-----------|---|--|-------------------------------|---------------------------------|-----------------------------------|
| | (a)=(b)+(c)+(d)+(e) Total Quantity Generated | (b) Broken Concrete (see Note 4) | (c) Reused in the Contract | (d) Reused in other Projects | (e) Disposed of as Public Fill |
| | (in '000m ³) | (in '000m ³) | (in '000m ³) | (in '000m ³) | (in '000m ³) |
| Jan | 5.298 | 0.646 | 0.160 | 0.000 | 4.492 |
| Feb | 7.243 | 0.572 | 0.320 | 0.000 | 6.351 |
| Mar | 11.241 | 0.831 | 0.225 | 0.000 | 10.186 |
| Apr | | | | | |
| May | | | | | |
| Jun | | | | | |
| Sub-total | 23.782 | 2.049 | 0.705 | 0.000 | 21.028 |
| Jul | | | | | |
| Aug | | | | | |
| Sep | | | | | |
| Oct | | | | | |
| Nov | | | | | |
| Dec | | | | | |
| Total | 23.782 | 2.049 | 0.705 | 0.000 | 21.028 |

| Month | Actual Quantities of Non-inert Construction Waste Generated Monthly | | | | | | | | | | | | |
|------------------|---|--------------|------------------|------------------|----------------------------|--------------|-----------------------|--------------|----------------|--------------|---|--------------|--|
| | Timber | | Metals | | Paper/ cardboard packaging | | Plastics (see Note 3) | | Chemical Waste | | Other Recyclable Materials (see Page 3) | | General Refuse disposed of at Landfill |
| | (in '000kg) | | (in '000kg) | | (in '000kg) | | (in '000kg) | | (in '000kg) | | (in '000kg) | | (in '000m ³) |
| | generated | recycled | generated | recycled | generated | recycled | generated | recycled | generated | recycled | generated | recycled | generated |
| Jan | 0.000 | 0.000 | 375.870 | 375.870 | 0.220 | 0.220 | 0.032 | 0.032 | 0.000 | 0.000 | 0.000 | 0.000 | 1.918 |
| Feb | 0.000 | 0.000 | 720.120 | 720.120 | 0.000 | 0.000 | 0.000 | 0.000 | 0.000 | 0.000 | 0.000 | 0.000 | 2.223 |
| Mar | 0.000 | 0.000 | 220.860 | 220.860 | 0.830 | 0.830 | 0.005 | 0.005 | 0.000 | 0.000 | 0.005 | 0.005 | 2.711 |
| Apr | | | | | | | | | | | | | |
| May | | | | | | | | | | | | | |
| Jun | | | | | | | | | | | | | |
| Sub-total | 0.000 | 0.000 | 1,316.850 | 1,316.850 | 1.050 | 1.050 | 0.037 | 0.037 | 0.000 | 0.000 | 0.005 | 0.005 | 6.852 |
| Jul | | | | | | | | | | | | | |
| Aug | | | | | | | | | | | | | |
| Sep | | | | | | | | | | | | | |
| Oct | | | | | | | | | | | | | |
| Nov | | | | | | | | | | | | | |
| Dec | | | | | | | | | | | | | |
| Total | 0.000 | 0.000 | 1,316.850 | 1,316.850 | 1.050 | 1.050 | 0.037 | 0.037 | 0.000 | 0.000 | 0.005 | 0.005 | 6.852 |

| Description of mode and details of recycling if any for the month e.g. XX kg of used timber was sent to YY site for transformation into fertilizers | | | | | |
|---|---|---|--|--|--|
| 5.0 kg of cans and 5.0 kg of plastic bottles were sent to Lau Choi Kee Co. Ltd. for recycling. | 830.0 kg of scrap metal were sent to Lau Choi Kee Co. Ltd. for recycling. | 220.86 tons of scrap metals were sent to Prosperity Metal Recycle Ltd., Hop Hing Metal Works and Win Link Trading Ltd. for recycling. | 1,661.60 tons of broken concrete were sent to Tailor Recycled Aggregates Ltd. for recycling. | | |

- Notes:
- (1) The performance targets are given in the Particular Specification on Environmental Management Plan.
 - (2) The waste flow table shall also include construction waste that are specified in the Contract to be imported for use at the site.
 - (3) Plastics refer to plastic bottles/containers, plastic sheets/foam from packaging material.
 - (4) Broken concrete for recycling into aggregates.
 - (5) If necessary, use the conversion factor: 1 full load of dumping truck being equivalent to 6.5 m³ by volume.

Appendix M

**Implementation Schedule for
Environmental Mitigation Measures**

| EIA Ref. | EM&A Ref. | Recommended Mitigation Measures | Objectives of the Recommended Measure & Main Concerns to address | Who to implement the measure? | Location of the measure | When to implement the measure? | What requirements or standards for the measure to achieve? |
|--|-----------|---|---|-------------------------------|--------------------------|--------------------------------|---|
| Air Quality Impact (Construction) | | | | | | | |
| 3.6.1.1 | 2.1 | <p>General Dust Control Measures</p> <p>The following dust suppression measures should be implemented:</p> <ul style="list-style-type: none"> ■ Frequent water spraying for active construction areas (4 times per day for active areas in Po Kak Tsai and 8 times per day for all other active areas), including areas with heavy construction and slope cutting activities ■ 80% of stockpile areas should be covered by impervious sheets ■ Speed of trucks within the site should be controlled to about 10 km/hr ■ All haul roads within the site should be paved to avoid dust emission due to vehicular movement | To minimize adverse dust emission generated from various construction activities of the works sites | Contractor | Construction Works Sites | During Construction | EIA Recommendation and Air Pollution Control (Construction Dust) Regulation |
| 3.6.1.2 | 2.1 | <p>Best Practice for Dust Control</p> <p>The relevant best practices for dust control as stipulated in the Air Pollution Control (Construction Dust) Regulation should be adopted to further reduce the construction dust impacts of the Project. These best practices include:</p> <p><i>Good site management</i></p> <ul style="list-style-type: none"> ■ The Contractor should maintain high standard of housekeeping to prevent emission of fugitive dust. ■ Loading, unloading, handling and storage of raw materials, wastes or by-products should be carried out in a manner so as to minimize the release of visible dust emission. ■ Any piles of materials accumulated on or around the work areas should be cleaned up regularly. ■ Cleaning, repair and maintenance of all plant facilities within the work areas should be carried out in a manner minimizing generation of fugitive dust emissions. ■ The material should be handled properly to prevent fugitive dust emission before cleaning. <p><i>Disturbed Parts of the Roads</i></p> <ul style="list-style-type: none"> ■ Each and every main temporary access should be paved with | To minimize adverse dust emission generated from various construction activities of the works sites | Contractor | Construction Works Sites | During Construction | EIA Recommendation and Air Pollution Control (Construction Dust) Regulation |

| EIA Ref. | EM&A Ref. | Recommended Mitigation Measures | Objectives of the Recommended Measure & Main Concerns to address | Who to implement the measure? | Location of the measure | When to implement the measure? | What requirements or standards for the measure to achieve? |
|----------|-----------|--|--|-------------------------------|-------------------------|--------------------------------|--|
| | | <p>concrete, bituminous hardcore materials or metal plates and kept clear of dusty materials; or</p> <ul style="list-style-type: none"> Unpaved parts of the road should be sprayed with water or a dust suppression chemical so as to keep the entire road surface wet. <p><i>Exposed Earth</i></p> <ul style="list-style-type: none"> Exposed earth should be properly treated by compaction, hydroseeding, vegetation planting or seeding with latex, vinyl, bitumen within six months after the last construction activity on the site or part of the site where the exposed earth lies. <p><i>Loading, Unloading or Transfer of Dusty Materials</i></p> <ul style="list-style-type: none"> All dusty materials should be sprayed with water immediately prior to any loading or transfer operation so as to keep the dusty material wet. <p><i>Debris Handling</i></p> <ul style="list-style-type: none"> Any debris should be covered entirely by impervious sheeting or stored in a debris collection area sheltered on the top and the three sides. Before debris is dumped into a chute, water should be sprayed so that it remains wet when it is dumped. <p><i>Transport of Dusty Materials</i></p> <ul style="list-style-type: none"> Vehicle used for transporting dusty materials/spoils should be covered with tarpaulin or similar material. The cover should extend over the edges of the sides and tailboards. <p><i>Wheel washing</i></p> <ul style="list-style-type: none"> Vehicle wheel washing facilities should be provided at each construction site exit. Immediately before leaving the construction site, every vehicle should be washed to remove any dusty materials from its body and wheels. <p><i>Use of vehicles</i></p> <ul style="list-style-type: none"> Immediately before leaving the construction site, every vehicle should be washed to remove any dusty materials from its body and wheels. Where a vehicle leaving the construction site is carrying a load of dusty materials, the load should be covered entirely by clean impervious sheeting to ensure that the dusty materials do not leak from the vehicle. | | | | | |

| EIA Ref. | EM&A Ref. | Recommended Mitigation Measures | Objectives of the Recommended Measure & Main Concerns to address | Who to implement the measure? | Location of the measure | When to implement the measure? | What requirements or standards for the measure to achieve? |
|--|-----------|---|--|-------------------------------|-------------------------|--------------------------------|--|
| | | <p><i>Site hoarding</i></p> <ul style="list-style-type: none"> Where a site boundary adjoins a road, street, service lane or other area accessible to the public, hoarding of not less than 2.4m high from ground level should be provided along the entire length of that portion of the site boundary except for a site entrance or exit. <p><i>Blasting</i></p> <ul style="list-style-type: none"> The areas within 30m from the blasting area should be wetted with water prior to blasting. | | | | | |
| <u>Air Quality Impact (Operation)</u> | | | | | | | |
| 3.5.2.2 | 2.2 | <p>The following odour containment and control measures will be provided for the proposed sewage treatment work at the BCP site:</p> <ul style="list-style-type: none"> The treatment work will be totally enclosed. Negative pressure ventilation will be provided within the enclosure to avoid any fugitive odorous emission from the treatment work. Further odour containment will be achieved by covering or confining the sewage channels, sewage tanks, and equipment with potential odour emission. Proper mixing will be provided at the equalization and sludge holding tanks to prevent sewage septicity. Chemical or biological deodorisation facilities with a minimum odour removal efficiency of 90% will be provided to treat potential odorous emissions from the treatment plant including sewage channels / tanks, filter press and screening facilities so as to minimize any potential odour impact to the nearby ASRs. | To minimize potential odour impact from operation of the proposed sewage treatment work at BCP | DSD | BCP | Operation Phase | EIA recommendation |
| <u>Noise Impact (Construction)</u> | | | | | | | |
| 4.4.1.4 | 3.1 | <p>Adoption of Quieter PME</p> <p>Use of the recommended quieter PME such as those given in the BS5228: Part 1:2009 and presented in Table 4.14, which can be found in Hong Kong.</p> | To minimize the construction air-borne noise impact | Contractors | Construction Work Sites | During Construction | EIA recommendation, EIAO and Noise Control Ordinance (NCO) |

| EIA Ref. | EM&A Ref. | Recommended Mitigation Measures | Objectives of the Recommended Measure & Main Concerns to address | Who to implement the measure? | Location of the measure | When to implement the measure? | What requirements or standards for the measure to achieve? |
|----------|-----------|---|--|-------------------------------|-------------------------|--------------------------------|--|
| 4.4.1.4 | 3.1 | <p>Use of Movable Noise Barrier</p> <p>The use of movable barrier for certain PME can further alleviate the construction noise impacts. In general, a 5 dB(A) reduction for movable PME and 10 dB(A) for stationary PME can be achieved depending on the actual design of the movable noise barrier. The Contractor shall be responsible for design of the movable noise barrier with due consideration given to the size of the PME and the requirement for intercepting the line of sight between the NSRs and PME. Barrier material with surface mass in excess of 7 kg/m² is recommended to achieve the predicted screening effect.</p> | To minimize the construction air-borne noise impact | Contractors | Construction Work Sites | During Construction | EIA recommendation, EIAO and NCO |
| 4.4.1.4 | 3.1 | <p>Use of Noise Enclosure/ Acoustic Shed</p> <p>The use of noise enclosure or acoustic shed is to cover stationary PME such as air compressor and concrete pump. With the adoption of the noise enclosure, the PME could be completely screened, and noise reduction of 15 dB(A) can be achieved according to the GW-TM.</p> | To minimize the construction air-borne noise impact | Contractors | Construction Work Sites | During Construction | EIA recommendation, EIAO and NCO |
| 4.4.1.4 | 3.1 | <p>Use of Noise Insulating Fabric</p> <p>Noise insulating fabric can be adopted for certain PME (e.g. drill rig, pilling auger etc). The insulating fabric should be lapped such that there are no openings or gaps on the joints. Technical data from manufacturers state that by using the Fabric, a noise reduction of over 10 dB(A) can be achieved on noise level.</p> | To minimize the construction air-borne noise impact | Contractors | Construction Work Sites | During Construction | EIA recommendation, EIAO and NCO |

| EIA Ref. | EM&A Ref. | Recommended Mitigation Measures | Objectives of the Recommended Measure & Main Concerns to address | Who to implement the measure? | Location of the measure | When to implement the measure? | What requirements or standards for the measure to achieve? |
|--|-----------|--|---|--|--|--------------------------------|--|
| 4.4.1.4 | 3.1 | <p>Good Site Practice</p> <p>The good site practices listed below should be followed during each phase of construction:</p> <ul style="list-style-type: none"> • Only well-maintained plant should be operated on-site and plant should be serviced regularly during the construction programme; • Silencers or mufflers on construction equipment should be utilized and should be properly maintained during the construction programme; • Mobile plant, if any, should be sited as far from NSRs as possible; • Machines and plant (such as trucks) that may be in intermittent use should be shut down between work periods or should be throttled down to a minimum; • Plant known to emit noise strongly in one direction should, wherever possible, be orientated so that the noise is directed away from the nearby NSRs; and • Material stockpiles and other structures should be effectively utilized, wherever practicable, in screening noise from on-site construction activities. | To minimize the construction air-borne noise impact | Contractors | Construction Work Sites | During Construction | EIA recommendation, EIAO and NCO |
| Noise Impact (Operation) | | | | | | | |
| <u>Road Traffic Noise</u> | | | | | | | |
| Table 4.42 and Figure 4.20.1 to 4.20.4 | 3.2 | Erection of noise barrier/ enclosure along the viaduct section. | To minimize the road traffic noise along the connecting road of BCP | Contractor | Loi Tung and Fanling Highway Interchange | Before Operation | EIAO and NCO |
| <u>Fixed Plant Noise</u> | | | | | | | |
| Table 4.46 | 3.2 | Specification of the maximum allowable sound power levels of the proposed fixed plants during daytime and night-time. | To minimize the fixed plant noise impact | Managing Authority of the buildings / Contractor | BCP, Administration Building and all ventilation buildings | Before Operation | EIA recommendation, EIAO and NCO |

| EIA Ref. | EM&A Ref. | Recommended Mitigation Measures | Objectives of the Recommended Measure & Main Concerns to address | Who to implement the measure? | Location of the measure | When to implement the measure? | What requirements or standards for the measure to achieve? |
|--|-----------|---|--|--|--|--------------------------------|---|
| 4.5.2.4 | 3.2 | <p>The following noise reduction measures shall be considered as far as practicable during operation:</p> <ul style="list-style-type: none"> Choose quieter plant such as those which have been effectively silenced; Include noise levels specification when ordering new plant (including chillier and E/M equipment); Locate fixed plant/louver away from any NSRs as far as practicable; Locate fixed plant in walled plant rooms or in specially designed enclosures; Locate noisy machines in a basement or a completely separate building; Install direct noise mitigation measures including silencers, acoustic louvers and acoustic enclosure where necessary; and Develop and implement a regularly scheduled plant maintenance programme so that equipment is properly operated and serviced in order to maintain a controlled level of noise. | To minimize the fixed plant noise impact | Managing Authority of the buildings / Contractor | BCP, Administration Building and all ventilation buildings | Before Operation | EIAO and NCO |
| Water Quality Impact (Construction) | | | | | | | |
| 5.6.1.1 | 4.1 | <p>Construction site runoff and drainage</p> <p>The site practices outlined in ProPECC Note PN 1/94 should be followed as far as practicable in order to minimise surface runoff and the chance of erosion. The following measures are recommended to protect water quality and when properly implemented should be sufficient to adequately control site discharges so as to avoid water quality impacts:</p> <ul style="list-style-type: none"> At the start of site establishment, perimeter cut-off drains to direct off-site water around the site should be constructed with internal drainage works and erosion and sedimentation control facilities implemented. Channels (both temporary and permanent drainage pipes and culverts), earth bunds or sand bag barriers should be provided on site to direct stormwater to silt removal facilities. The design of the temporary on-site drainage system should be undertaken by the Contractor prior to the commencement of construction. The dikes or embankments for flood protection should be implemented around the boundaries of earthwork areas. | To control site runoff and drainage; prevent high sediment loading from reaching the nearby watercourses | Contractor | Construction Works Sites | Construction Phase | Practice Note for Professional Persons on Construction Site Drainage (ProPECC Note PN 1/94) |

| EIA Ref. | EM&A Ref. | Recommended Mitigation Measures | Objectives of the Recommended Measure & Main Concerns to address | Who to implement the measure? | Location of the measure | When to implement the measure? | What requirements or standards for the measure to achieve? |
|----------|-----------|---|--|-------------------------------|-------------------------|--------------------------------|--|
| | | <p>Temporary ditches should be provided to facilitate the runoff discharge into stormwater drainage system through a sediment/silt trap. The sediment/silt traps should be incorporated in the permanent drainage channels to enhance deposition rates, if practical.</p> <ul style="list-style-type: none"> ▪ Sand/silt removal facilities such as sand/silt traps and sediment basins should be provided to remove sand/silt particles from runoff to meet the requirements of the TM standards under the WPCO. The design of efficient silt removal facilities should be based on the guidelines in Appendix A1 of ProPECC Note PN 1/94. Sizes may vary depending upon the flow rate. The detailed design of the sand/silt traps should be undertaken by the Contractor prior to the commencement of construction. ▪ All drainage facilities and erosion and sediment control structures should be regularly inspected and maintained to ensure proper and efficient operation at all times and particularly during rainstorms. Deposited silt and grit should be regularly removed, at the onset of and after each rainstorm to ensure that these facilities are functioning properly at all times. ▪ Measures should be taken to minimize the ingress of site drainage into excavations. If excavation of trenches in wet periods is necessary, they should be dug and backfilled in short sections wherever practicable. Water pumped out from foundation excavations should be discharged into storm drains via silt removal facilities. ▪ If surface excavation works cannot be avoided during the wet season (April to September), temporarily exposed slope/soil surfaces should be covered by tarpaulin or other means, as far as practicable, and temporary access roads should be protected by crushed stone or gravel, as excavation proceeds. Interception channels should be provided (e.g. along the crest/edge of the excavation) to prevent storm runoff from washing across exposed soil surfaces. Arrangements should always be in place to ensure that adequate surface protection measures can be safely carried out well before the arrival of a rainstorm. Other measures that need to be implemented before, during and after rainstorms are summarized in ProPECC Note PN 1/94. ▪ The overall slope of the site should be kept to a minimum to reduce | | | | | |

| EIA Ref. | EM&A Ref. | Recommended Mitigation Measures | Objectives of the Recommended Measure & Main Concerns to address | Who to implement the measure? | Location of the measure | When to implement the measure? | What requirements or standards for the measure to achieve? |
|----------|-----------|---|--|-------------------------------|---|--------------------------------|--|
| | | <p>the erosive potential of surface water flows.</p> <ul style="list-style-type: none"> ▪ All vehicles and plant should be cleaned before leaving a construction site to ensure no earth, mud, debris and the like is deposited by them on roads. An adequately designed and sited wheel washing facility should be provided at construction site exit where practicable. Wash-water should have sand and silt settled out and removed regularly to ensure the continued efficiency of the process. The section of access road leading to, and exiting from, the wheel-wash bay to the public road should be paved with sufficient backfall toward the wheel-wash bay to prevent vehicle tracking of soil and silty water to public roads and drains. ▪ Open stockpiles of construction materials or construction wastes on-site should be covered with tarpaulin or similar fabric during rainstorms. Measures should be taken to prevent the washing away of construction materials, soil, silt or debris into any drainage system. ▪ Manholes (including newly constructed ones) should be adequately covered and temporarily sealed so as to prevent silt, construction materials or debris being washed into the drainage system and stormwater runoff being directed into foul sewers. ▪ Precautions should be taken at any time of the year when rainstorms are likely. Actions should be taken when a rainstorm is imminent or forecasted and actions to be taken during or after rainstorms are summarized in Appendix A2 of ProPECC Note PN 1/94. Particular attention should be paid to the control of silty surface runoff during storm events, especially for areas located near steep slopes. ▪ Bentonite slurries used in piling or slurry walling should be reconditioned and reused wherever practicable. Temporary enclosed storage locations should be provided on-site for any unused bentonite that needs to be transported away after all the related construction activities are completed. The requirements in ProPECC Note PN 1/94 should be adhered to in the handling and disposal of bentonite slurries. | | | | | |
| 5.6.1.1 | 4.1 | <p>Good site practices for works within water gathering grounds</p> <p>The following conditions should be complied, if there is any works to be carried out within the water gathering grounds:</p> | To minimize water quality impacts to the water gathering grounds | Contractor | Construction Works Sites within the water gathering | Construction Phase | ProPECC Note PN 1/94 |

| EIA Ref. | EM&A Ref. | Recommended Mitigation Measures | Objectives of the Recommended Measure & Main Concerns to address | Who to implement the measure? | Location of the measure | When to implement the measure? | What requirements or standards for the measure to achieve? |
|----------|-----------|---|--|-------------------------------|-------------------------|--------------------------------|--|
| | | <ul style="list-style-type: none"> ▪ Adequate measures should be implemented to ensure no pollution or siltation occurs to the catchwaters and catchments. ▪ No earth, building materials, oil or fuel, soil, toxic materials or any materials that may possibly cause contamination to water gathering grounds are allowed to be stockpiled on site. ▪ All surplus spoil should be removed from water gathering grounds as soon as possible. ▪ Temporary drains with silt traps should be constructed at the site boundary before the commencement of any earthworks. ▪ Regular cleaning of silt traps should be carried out to ensure proper operation at all time. ▪ All excavated or filled surfaces which have the risk of erosion should always be protected form erosion. ▪ Facilities for washing the wheels of vehicles before leaving the site should be provided. ▪ Any construction plant which causes pollution to catchwaters or catchments due to the leakage of oil or fuel should be removed off site immediately. ▪ No maintenance activities which may generate chemical wastes should be undertaken in the water gathering grounds. Vehicle maintenance should be confined to designated paved areas only and any spillages should be cleared up immediately using absorbents and waste oils should be collected in designated tanks prior to disposal off site. All storm water run-off from these areas should be discharged via oil/petrol separators and sand/silt removal traps. ▪ Any soil contaminated with fuel leaked from plant should be removed off site and the voids arising from removal of contaminated soil should be replaced by suitable material approved by the Director of Water Supplies. ▪ Provision of temporary toilet facilities and use of chemicals or insecticide of any kind are subject to the approval of the Director of Water Supplies. ▪ Drainage plans should be submitted for approval by the Director of | | | grounds | | |

| EIA Ref. | EM&A Ref. | Recommended Mitigation Measures | Objectives of the Recommended Measure & Main Concerns to address | Who to implement the measure? | Location of the measure | When to implement the measure? | What requirements or standards for the measure to achieve? |
|---|-----------|---|--|-------------------------------|---|--------------------------------|---|
| | | <p>Water Supplies.</p> <ul style="list-style-type: none"> ▪ An unimpeded access through the waterworks access road should always be maintained. ▪ Earthworks near catchwaters or streamcourses should only be carried out in dry season between October and March, ▪ Advance notice must be given before the commencement of works on site quoting WSD's approval letter reference. | | | | | |
| 5.6.1.2 | 4.1 | <p>Good site practices of general construction activities</p> <p>Construction solid waste, debris and refuse generated on-site should be collected, handled and disposed of properly to avoid entering any nearby stormwater drain. Stockpiles of cement and other construction materials should be kept covered when not being used.</p> <p>Oils and fuels should only be stored in designated areas which have pollution prevention facilities. To prevent spillage of fuels and solvents to any nearby stormwater drain, all fuel tanks and storage areas should be provided with locks and be sited on sealed areas, within bunds of a capacity equal to 110% of the storage capacity of the largest tank. The bund should be drained of rainwater after a rain event.</p> | To minimize water quality impacts | Contractor | All construction works sites | Construction phase | EIA Recommendation |
| 5.6.1.3 | 4.1 | <p>Sewage effluent from construction workforce</p> <p>Temporary sanitary facilities, such as portable chemical toilets, should be employed on-site where necessary to handle sewage from the workforce. A licensed contractor should be employed to provide appropriate and adequate portable toilets and be responsible for appropriate disposal and maintenance.</p> | To minimize water quality impacts | Contractor | All construction works sites with on-site sanitary facilities | Construction phase | EIA Recommendation and Water Pollution Control Ordinance (WPCO) |
| 5.6.1.4 | 4.1 | <p>Hydrogeological Impact</p> <p>Grout injection works would be conducted before blasting, for sealing a limited area around the tunnel with a grout of a suitable strength for controlling the potential groundwater inflows. The pre-injection grouting method would be supplemented by post-injection grouting where necessary to further enhance the groundwater inflow control. On-site treatment for the groundwater ingress pumped out would be required to remove any contamination by grouting materials before discharge off-site.</p> | To minimize water quality impacts | Contractor | Construction works sites of the drill and blast tunnel | Construction phase | EIA Recommendation and WPCO |
| Water Quality Impact (Operation) | | | | | | | |
| No mitigation measure is required. | | | | | | | |

| EIA Ref. | EM&A Ref. | Recommended Mitigation Measures | Objectives of the Recommended Measure & Main Concerns to address | Who to implement the measure? | Location of the measure | When to implement the measure? | What requirements or standards for the measure to achieve? |
|---|-----------|---|--|-------------------------------|---|--------------------------------|--|
| <u>Sewage and Sewerage Treatment Impact (Construction)</u> | | | | | | | |
| 6.7 | 5 | The sewage generated by the on-site workforce should be collected in chemical toilets and disposed of off-site by a licensed waste collector. | To minimize water quality impacts | Contractor | All construction works sites with on-site sanitary facilities | Construction phase | EIA recommendation and WPCO |
| <u>Sewage and Sewerage Treatment Impact (Operation)</u> | | | | | | | |
| 6.6.3 | 5 | Sewage generated by the BCP and Chuk Yuen Village Resite will be collected and treated by the proposed on-site sewage treatment facility using Membrane Bioreactor treatment with a portion of the treated wastewater reused for irrigation and flushing within the BCP. | To minimize water quality impacts | DSD | BCP | Operation phase | EIA recommendation and WPCO |
| 6.5.3 | 5 | Sewage generated from the Administration Building will be discharged to the existing local sewerage system. | To minimize water quality impacts | DSD | Administration Building | Operation phase | EIA recommendation and WPCO |
| <u>Waste Management Implication (Construction)</u> | | | | | | | |
| 7.6.1.1 | 6 | <p>Good Site Practices</p> <p>Adverse impacts related to waste management such as potential hazard, air, odour, noise, wastewater discharge and public transport as mentioned in section 3.4.7.2 (ii)(c) of the Study Brief are not expected to arise, provided that good site practices are strictly followed. Recommendations for good site practices during the construction activities include:</p> <ul style="list-style-type: none"> ▪ Nomination of an approved person, such as a site manager, to be responsible for good site practices, arrangements for collection and effective disposal to an appropriate facility, of all wastes generated at the site ▪ Training of site personnel in proper waste management and chemical handling procedures ▪ Provision of sufficient waste disposal points and regular collection of waste ▪ Dust suppression measures as required under the Air Pollution Control (Construction Dust) Regulation should be followed as far as practicable. Appropriate measures to minimise windblown litter and dust/odour during transportation of waste by covering trucks or in enclosed containers ▪ General refuse shall be removed away immediately for disposal. As | To minimize adverse environmental impact | Contractor | Construction works sites (general) | Construction Phase | EIA recommendation; Waste Disposal Ordinance; Waste Disposal (Chemical Wastes) (General) Regulation; and ETWB TC(W) No. 19/2005, Environmental Management on Construction Site |

| EIA Ref. | EM&A Ref. | Recommended Mitigation Measures | Objectives of the Recommended Measure & Main Concerns to address | Who to implement the measure? | Location of the measure | When to implement the measure? | What requirements or standards for the measure to achieve? |
|----------|-----------|---|--|-------------------------------|------------------------------------|--------------------------------|--|
| | | <p>such odour is not anticipated to be an issue to distant sensitive receivers</p> <ul style="list-style-type: none"> ▪ Provision of wheel washing facilities before the trucks leaving the works area so as to minimise dust introduction from public road ▪ Covers and water spraying system should be provided for the stockpiled C&D material to prevent dust impact or being washed away ▪ Designate different locations for storage of C&D material to enhance reuse ▪ Well planned programme for transportation of C&D material to lessen the off-site traffic impact. Well planned delivery programme for offsite disposal and imported filling material such that adverse noise impact from transporting of C&D material is not anticipated ▪ Site practices outlined in ProPECC PN 1/94 “Construction Site Drainage” should be adopted as far as practicable, such as cleaning and maintenance of drainage systems regularly ▪ Provision of cover for the stockpile material, sand bag or earth bund as barrier to prevent material from washing away and entering the drains | | | | | |
| 7.6.1.2 | 6 | <p>Waste Reduction Measures</p> <p>Good management and control can prevent the generation of a significant amount of waste. Waste reduction is best achieved at the planning and design stage, as well as by ensuring the implementation of good site practices. Recommendations to achieve waste reduction include:</p> <ul style="list-style-type: none"> ▪ Segregation and storage of different types of waste in different containers, skips or stockpiles to enhance reuse or recycling of materials and their proper disposal ▪ Encourage collection of aluminium cans by providing separate labelled bins to enable this waste to be segregated from other general refuse generated by the work force ▪ Proper storage and site practices to minimise the potential for damage or contamination of construction materials ▪ Plan and stock construction materials carefully to minimise amount | To reduce the quantity of wastes | Contractor | Construction works sites (General) | Construction Phase | EIA recommendation and Waste Disposal Ordinance |

| EIA Ref. | EM&A Ref. | Recommended Mitigation Measures | Objectives of the Recommended Measure & Main Concerns to address | Who to implement the measure? | Location of the measure | When to implement the measure? | What requirements or standards for the measure to achieve? |
|----------|-----------|--|--|-------------------------------|------------------------------------|--------------------------------|---|
| | | <p>of waste generated and avoid unnecessary generation of waste</p> <ul style="list-style-type: none"> In addition to the above measures, specific mitigation measures are recommended below for the identified waste arising to minimise environmental impacts during handling, transportation and disposal of these wastes. | | | | | |
| 7.6.1.3 | 6 | <p>C&D Materials</p> <p>In order to minimise impacts resulting from collection and transportation of C&D material for off-site disposal, the excavated materials should be reused on-site as backfilling material as far as practicable. The surplus rock and other inert C&D material would be disposed of at the Government's Public Fill Reception Facilities (PFRFs) at Tuen Mun Area 38 for beneficial use by other projects in the HKSAR as the last resort. C&D waste generated from general site clearance and tree felling works would require disposal to the designated landfill site. Other mitigation requirements are listed below:</p> <ul style="list-style-type: none"> A Waste Management Plan should be prepared and implemented in accordance with ETWB TC(W) No. 19/2005 Environmental Management on Construction Site; and In order to monitor the disposal of C&D material and solid wastes at public filling facilities and landfills, and to control fly-tipping, a trip-ticket system (e.g. ETWB TCW No. 31/2004) should be included. | To minimize impacts resulting from C&D material | Contractor | Construction Works Sites (General) | Construction Phase | EIA recommendation; Waste Disposal Ordinance; and ETWB TCW No. 31/2004 |
| 7.6.1.4 | 6 | <p>General refuse</p> <p>General refuse should be stored in enclosed bins or compaction units separated from other C&D material. A reputable waste collector is to be employed by the Contractor to remove general refuse from the site separately. Preferably an enclosed and covered area should be provided to reduce the occurrence of 'wind blown' litter.</p> | To minimize impacts resulting from collection and transportation of general refuse for off-site disposal | Contractor | Construction works sites (General) | Construction phase | Waste Disposal Ordinance and Public Health and Municipal Services Ordinance - Public Cleansing and Prevention of Nuisances Regulation |
| 7.6.1.5 | 6 | <p>Chemical waste</p> <p>If chemical wastes are produced at the construction site, the Contractor will be required to register with the EPD as a chemical waste producer and to follow the guidelines stated in the <i>Code of Practice on the Packaging, Labelling and Storage of Chemical Wastes</i>. Good quality containers compatible with the chemical wastes should be used, and incompatible chemicals should be stored separately. Appropriate labels should be securely attached on each chemical waste container indicating the corresponding chemical characteristics of the chemical</p> | To minimize impacts resulting from collection and transportation of chemical waste for off-site disposal | Contractor | Construction works sites (General) | Construction phase | Waste Disposal (Chemical Waste) (General) Regulation and Code of Practice on the Packaging, Labelling and Storage of Chemical Wastes |

Appendix N

Investigation Report for Exceedance

Agreement No. CE 45/2008
Liantang/ Heung Yuen Wai Boundary Control Point and Associated Works
Investigation Report on Action or Limit Level Non-compliance

| | | | | | |
|---|--------------|---|--------------------|---|--------------------|
| Project | | CE 45/2008 | | | |
| Date | | 1 March 2018 | 3 March 2018 | 1 March 2018 | 3 March 2018 |
| Location | | WM3x | | | |
| Time | | 10:55 | 9:44 | 10:55 | 9:44 |
| Parameter | | Turbidity (NTU) | | Suspended Solids (mg/L) | |
| Action Level | | 13.4 AND 120% of upstream control station of the same day | | 12.6 AND 120% of upstream control station of the same day | |
| Limit Level | | 14.0 AND 130% of upstream control station of the same day | | 12.9 AND 130% of upstream control station of the same day | |
| Measured Level | WM3-C | 1.6 | 3.5 | 3.5 | 7.5 |
| | WM3x | 24.45 | 119.0 | 39.5 | 185.0 |
| Exceedance | | Limit Level | Limit Level | Limit Level | Limit Level |
| Investigation Results, Recommendations & Mitigation Measures | | <ol style="list-style-type: none"> 1. According to the site information provided from the Contractor of C2 (DHK), the construction activities carried out on 1 and 3 March 2018 at upstream of WM3x were construction of fence wall and permanent drainage, fitting out and underground utilities for Admin Building and tunnel works at North Portal Site. The relevant works area under C2 and the water monitoring locations are illustrated in <i>Figure 1</i>. 2. According to the site photo taken on 1 March 2018, the water quality observed at WM3x was slightly turbid and at WM3-C was clear. On 3 March 2018, turbid water was observed at WM3 while the water quality at WM3-C was clear. It was noted that the channel of WM3x also received the storm water from Sha Tau Kok Road and the adjacent villages. (<i>Photos 1 to 4 & Figure 1</i>) 3. Joint site inspections with AECOM, IEC, DHK and ET were carried out on 23 February. At Admin Building Site, it was observed that site area was mostly hard paved and wastewater generated from the construction works was limited. The adjacent channel and catch pit receiving the wastewater from Admin Building and upstream area were clear and no adverse water quality impact was identified during site inspection. (<i>Photos 5 to 7</i>) Inspection was carried out at North Portal Site on 23 February and 1 March 2018, it was observed wastewater treatment facilities were in place properly, and the water quality outside the discharge point at downstream Loi Tung Stream was visually clear. (<i>Photos 8 & 9</i>) 4. Based on the above investigation, it is considered that the exceedances were related to other source of turbid water and not caused by the works under Contract 2. 5. According to Event and Action, the monitoring frequency at WM3x has been increased to daily due to the limit level exceedance recorded until no exceedances were triggered in consecutive days. There were no exceedances triggered in the monitoring result on 2 and 5 March 2018. Nevertheless, the Contractor should continually fully implement the water mitigation measures as recommended in the implementation schedule for environmental mitigation measures in the EM&A Manual. | | | |

Prepared By : Nicola Hon

Designation : Environmental Consultant

Signature : 

Date : 22 March 2018

Photo Record



Photo 1
During water sampling on 1 March 2018, the water quality observed at WM3x was slightly turbid.



Photo 2
During water sampling on 1 March 2018, the water quality flowing at WM3-C was clear.



Photo 3
During water sampling on 3 March 2018, the water quality observed at WM3x was turbid.



Photo 4
During water sampling on 3 March 2018, the water quality flowing at WM3-C was clear.



Photo 5
At Admin Building Site, it was observed that site area was mostly hard paved and wastewater generated from the construction works was limited.



Photo 6
The adjacent channel and catch pit receiving the wastewater from Admin Building and upstream area were clear and no adverse water quality impact was identified during site inspection.

**Photo 7**

The adjacent channel and catch pit receiving the wastewater from Admin Building and upstream area were clear and no adverse water quality impact was identified during site inspection.

**Photo 8**

Joint site inspection was conducted on 23 February 2018, the water quality outside the discharge point at downstream Loi Tung Stream was visually clear.

**Photo 9**

Joint site inspection was conducted on 1 March 2018, the water quality outside the discharge point at downstream Loi Tung Stream was visually clear.

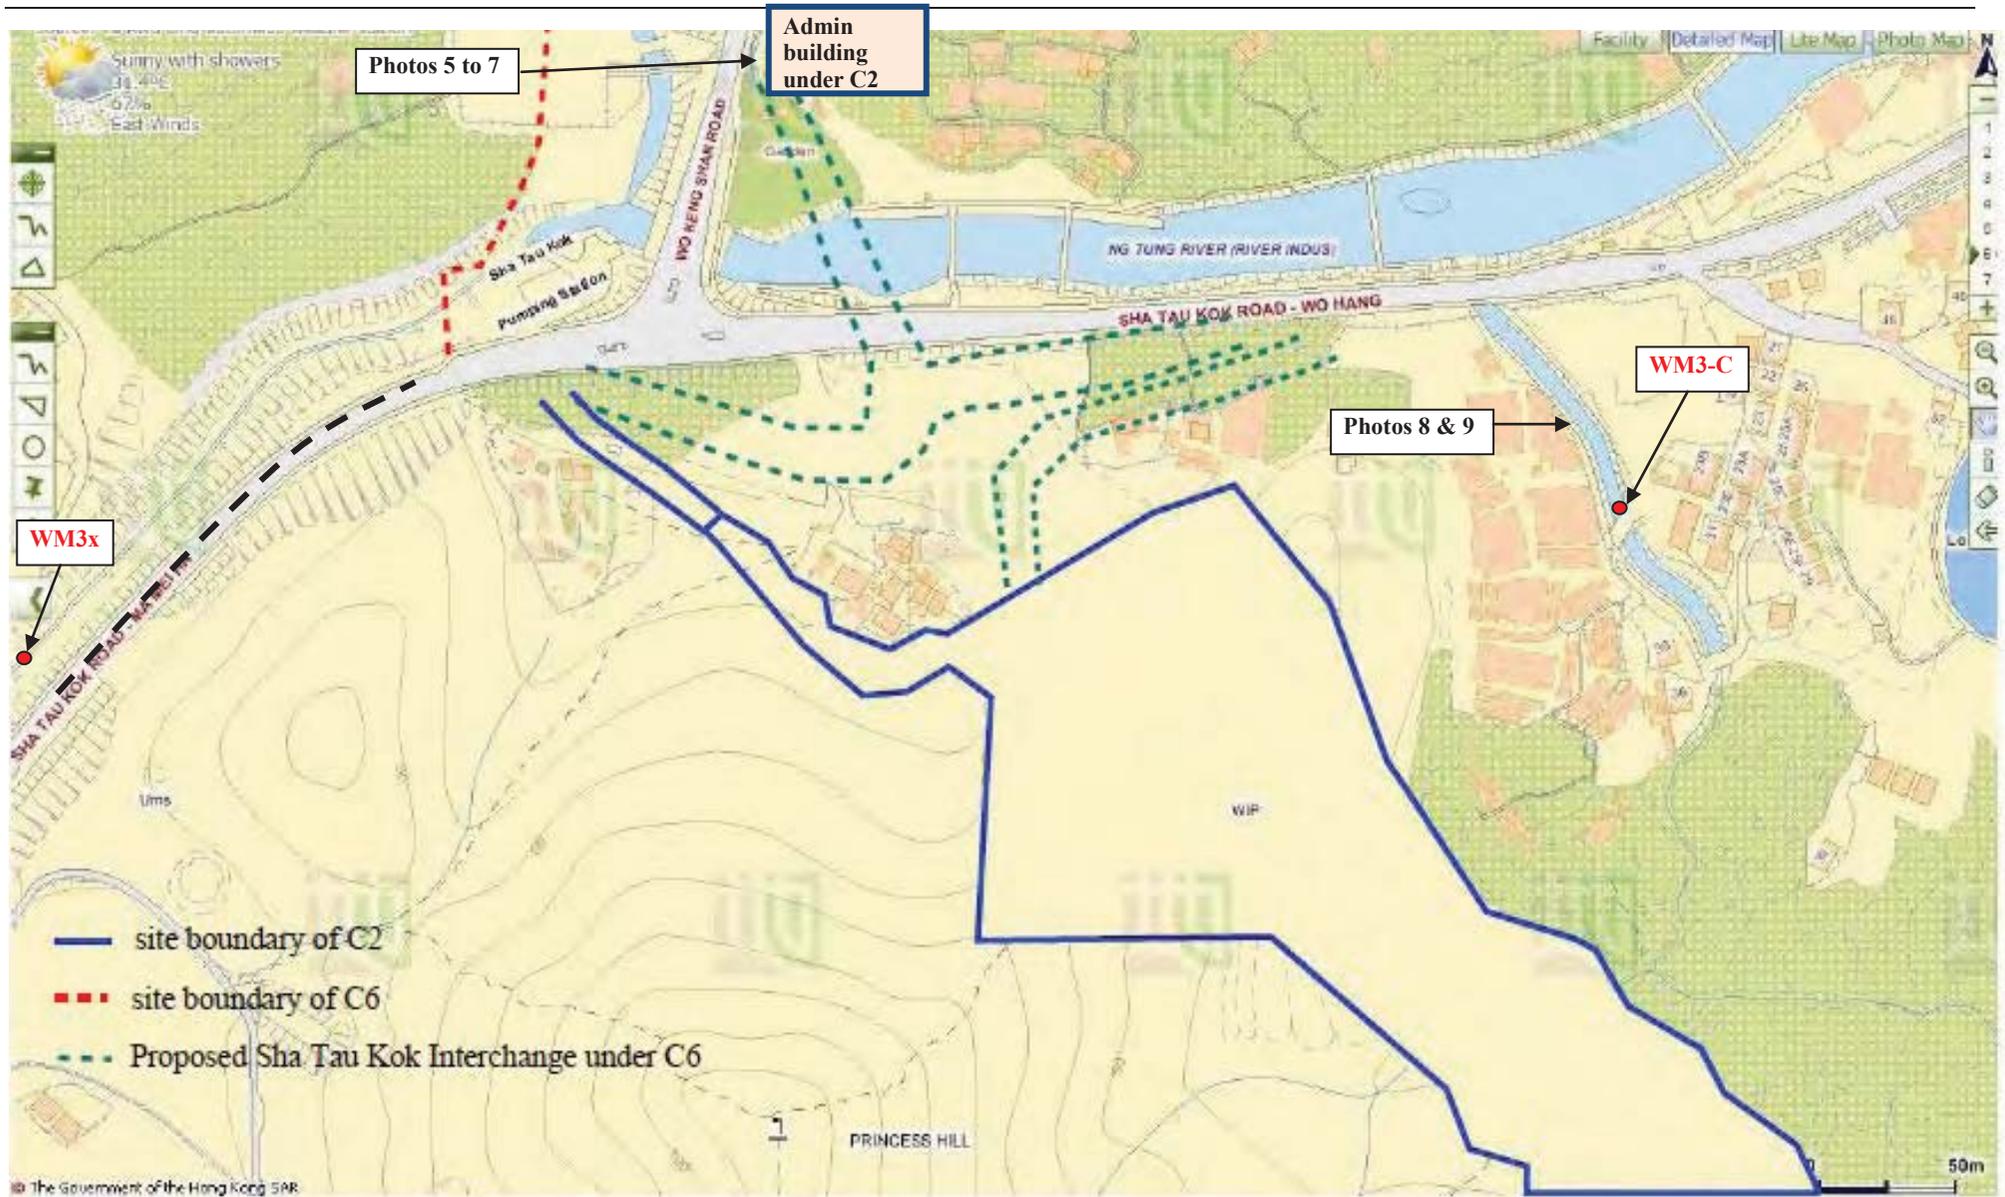


Figure 1 Location Map for Works Area under Contract 2 and Water Quality Monitoring Location

Agreement No. CE 45/2008
Liantang/ Heung Yuen Wai Boundary Control Point and Associated Works
Investigation Report on Action or Limit Level Non-compliance

| | | | | | |
|---|--------------|---|--------------------|---|--------------------|
| Project | | CE 45/2008 | | | |
| Date | | 1 March 2018 | 3 March 2018 | 1 March 2018 | 3 March 2018 |
| Location | | WM3x | | | |
| Time | | 10:55 | 9:44 | 10:55 | 9:44 |
| Parameter | | Turbidity (NTU) | | Suspended Solids (mg/L) | |
| Action Level | | 13.4 AND 120% of upstream control station of the same day | | 12.6 AND 120% of upstream control station of the same day | |
| Limit Level | | 14.0 AND 130% of upstream control station of the same day | | 12.9 AND 130% of upstream control station of the same day | |
| Measured Level | WM3-C | 1.6 | 3.5 | 3.5 | 7.5 |
| | WM3x | 24.45 | 119.0 | 39.5 | 185.0 |
| Exceedance | | Limit Level | Limit Level | Limit Level | Limit Level |
| Investigation Results, Recommendations & Mitigation Measures | | <ol style="list-style-type: none"> 1. According to the site information provided by the Contractor of C6 (CCKJV), the construction activities at South Portal Site (upstream of WM3x) carried out on 1 and 3 March 2018 was mainly tunnel excavation and erection of bridge segment. The monitoring locations and works areas are illustrated in <i>Figure 1</i>. 2. According to the site photo taken on 1 March 2018, the water quality observed at WM3x was slightly turbid and at WM3-C was clear. On 3 March 2018, turbid water was observed at WM3 while the water quality at WM3-C was clear. It was noted that the channel of WM3x also received the storm water from Sha Tau Kok Road and the adjacent villages. (<i>Photos 1 to 4 and Figure 1</i>) 3. Inspection was carried out at the channel adjacent to site area of Contract 6, it was observed that the water quality in the channel of South Portal Site was clear and no deteriorated water quality was noted from South Portal Site. (<i>Photos 5 & 6</i>) 4. Weekly joint site inspection by RE, Contractor, IEC and ET was conducted on 2 March 2018 to audit the site environmental performance. The findings of the inspection are summarized below:- <ol style="list-style-type: none"> (a) Wastewater treatment facilities at South Portal were function properly and the effluent was clear. (<i>Photo 7 and 8</i>) (b) Site hoarding with sealed footing was installed and no runoff from the site area was anticipated. (c) The construction site was general in order and no adverse water quality impact was observed. 5. Based on the above investigation, it is considered that the exceedances were unlikely caused by the works under Contract 6. 6. According to Event and Action, the monitoring frequency at WM3x has been increased to daily due to the limit level exceedance recorded until no exceedances were triggered in consecutive days. There were no | | | |

| | |
|---------------------------|---|
| | exceedances triggered in the monitoring result on 2 and 5 March 2018. Nevertheless, the Contractor should continually fully implement the water mitigation measures as recommended in the implementation schedule for environmental mitigation measures in the EM&A Manual. |
| Action to be taken | The Contractor is reminded to fully implement the water mitigation measures as recommended in the implementation schedule for environmental mitigation measures in the EM&A Manual. |

Prepared By : _____ Nicola Hon _____

Designation : _____ Environmental Consultant _____

Signature : _____  _____

Date : _____ 20 March 2018 _____

Photo Record**Photo 1**

During water sampling on 1 March 2018, the water quality observed at WM3x was slightly turbid.

**Photo 2**

During water sampling on 1 March 2018, the water quality flowing at WM3-C was clear.

**Photo 3**

During water sampling on 3 March 2018, the water quality observed at WM3x was turbid.

**Photo 4**

During water sampling on 3 March 2018, the water quality flowing at WM3-C was clear.

**Photo 5**

On 1 March 2018, it was observed that the water quality in the channel of South Portal Site was clear and no deteriorated water quality was noted from South Portal Site.

**Photo 6**

On 3 March 2018, it was observed that the water quality in the channel of South Portal Site was clear and no deteriorated water quality was noted from South Portal Site.



Photo 7

Joint site inspection was conducted on 2 March 2018. It was observed that wastewater treatment facilities at South Portal were function properly and the effluent was clear.



Photo 8

Joint site inspection was conducted on 2 March 2018. It was observed that wastewater treatment facilities at South Portal were function properly and the effluent was clear.

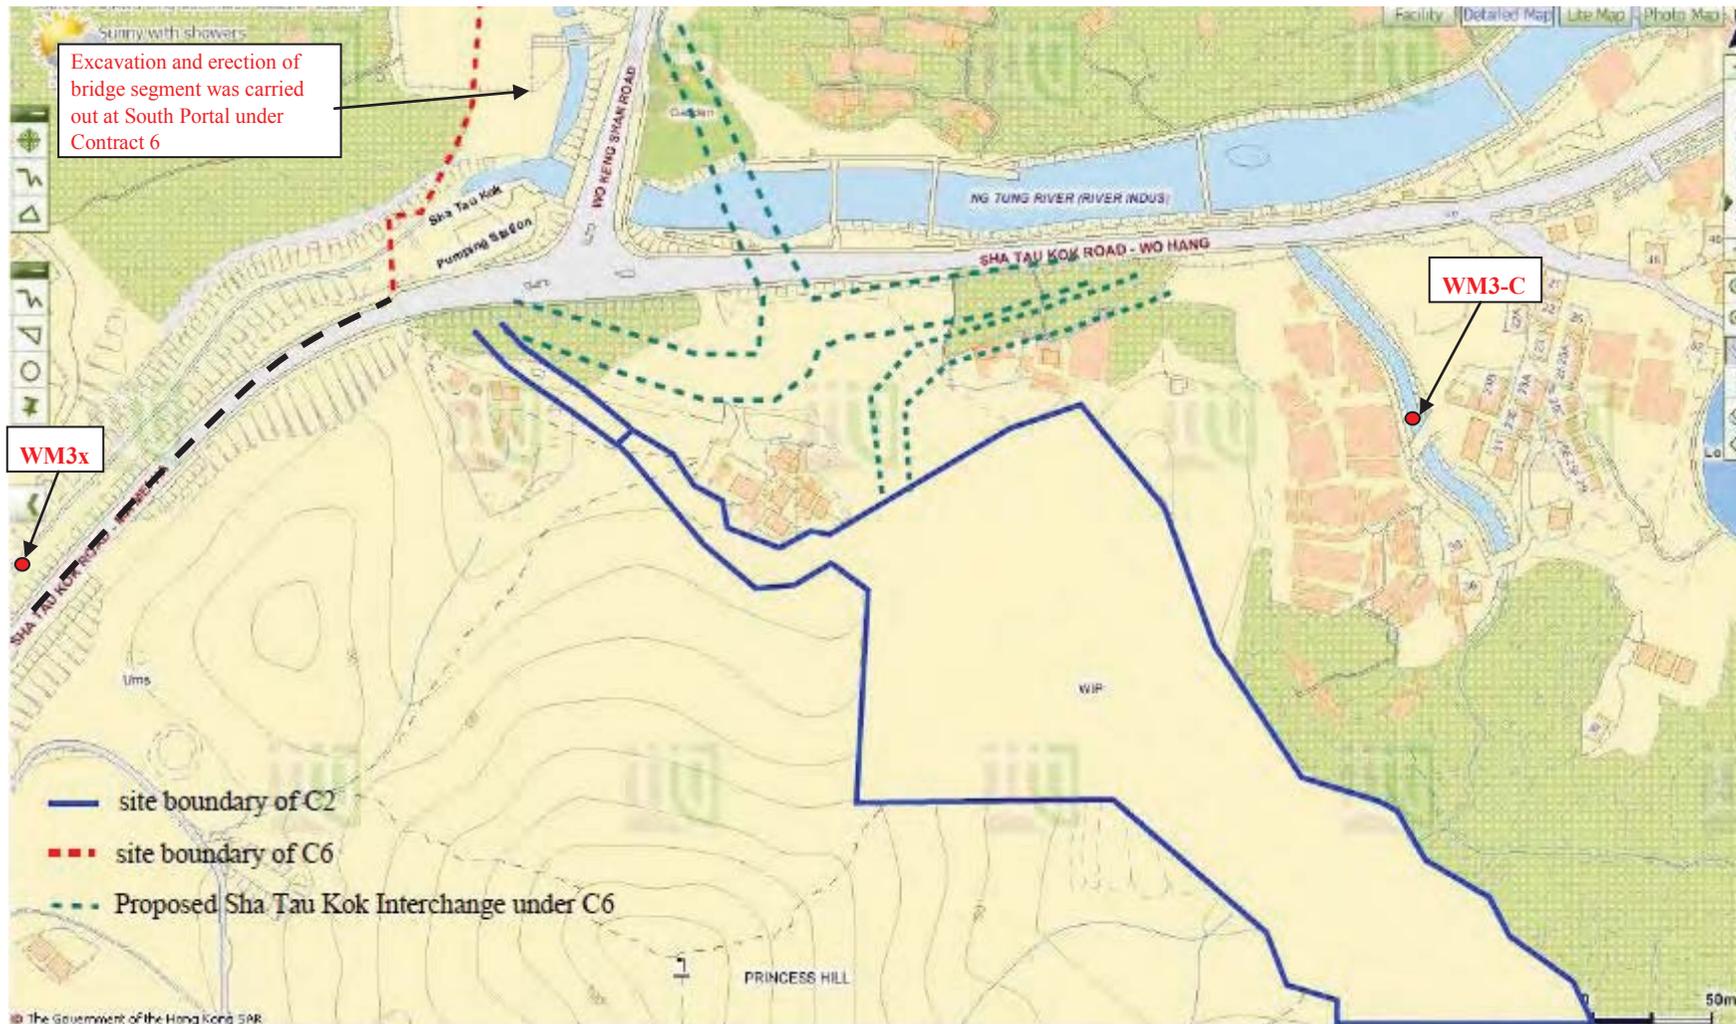


Figure 1 Location Map for Works Area under Contract 6 and Water Quality Monitoring Location

Appendix O

Investigation Report for Complaint

Agreement No. CE 45/2008
Liantang/ Heung Yuen Wai Boundary Control Point and Associated Works
Investigation Report on Environmental Complaint / Enquires

| | |
|-----------------------------|---|
| Complaint Log No. | CE 45/2008 – 71 |
| Received Date by ET | 29 January 2018 and 12 February 2018 |
| Related Contracts | Contract 2 |
| Complaint Details | <p>(a) A complaint was received by RE on 24 January 2018 from EPD regarding observations of some of the spoil was dropped into the sea during the offloading operation at Cheung Sha Wan Pier.</p> <p>(b) On 12 February 2018, supplementary document was provided by RE from EPD regarding the operation of the Cheung Sha Wan Pier and suspicion of delivery of excavated materials to the Mainland China. The queries within the scope of investigation are shown below:-</p> <p>(i) 此新建的卸泥碼頭是否包含在CEDD工程項目環評報告之建築廢料管理計劃內經公眾諮詢及環保署長批准？那個部門、顧問公司或承建商管理？</p> <p>(ii) 上述工程是否合法在其工地範圍以外或公眾堆填區以外地方進行裝卸、轉運建築廢料，有何措施監管？何人監管？</p> <p>(iii) 運卸過程中塵土飛揚，建築廢料掉入海中是否違法？貴署會否執法？</p> |
| Complaint Location | Cheung Sha Wan Pier (CSW Pier) |
| Date of Complaint | 24 January 2018 |
| Environmental Aspect | Waste Management |
| Complainant | Undisclosed |
| Complaint Route | From EPD |
| Investigation Result | <p>1. A complaint was received by RE on 24 January 2018 from EPD regarding observations of some of the spoil was dropped into the sea during the offloading operation at CSW Pier. On 12 February 2018, supplementary document was provided by RE from EPD regarding the operation of the CSW Pier and suspicion of delivery of excavated materials to the Mainland China. The complaint location is located within Yuen Fat Wharf in Cheung Sha Wan where provides logistics services including cargo and goods transportation, distribution center management, etc. A section of the jetty has been rented and operated by Contractor of Contract 2 (hereinafter “DHK”)’s Subcontractor as transfer station for unloading excavated materials from various sources including Contract 2. The location of the CSW Pier is shown in <i>Figure 1</i>.</p> <p>2. Upon receipt of the complaint, joint site inspection by RE, IEC, DHK and ET was carried out on 9th February 2018 at Cheung Sha Wan Pier. The observations during the site investigation are summarized in below.</p> <p style="text-align: center;"><u>Operation of the Jetty</u></p> <p>(a) To efficiently manage the excavated materials generated from the Project, an updated Waste Management Plan (Rev. H) was made by DHK in November 2017 to include an alternative way for delivering the excavated materials to public fill banks not only by trucks but also by barges. The Waste</p> |

Management Plan (Rev. H) was submitted to EPD on 1st November 2017 after certification by ETL and verification by IEC. EPD has issued comments on the plan to DHK on 5th January 2018 and revision was made by DHK on 24th February 2018. IEC provided comments to DHK on the revised WMP on 6th March 2018 and the WMP is currently being further revised by the DHK.

- (b) A section of jetty in Yuen Fat Wharf has been rented and operated by Tapbo Civil Engineering Company Limit as a transfer station for unloading and transferring excavated materials from various sources including Contract 2. The unloaded materials of Contract 2 will be subsequently delivered to the designated disposal ground, TM38 or TKO137, which mainly used on Sundays and Public Holidays. The jetty is also used by other projects in weekdays, Sundays and Public Holidays.
- (c) During the site investigation on 9th February 2018, it was observed that the tipping hall of the jetting (area of unloading from trucks to barges) was enclosed with top and two sides to minimise fugitive dust emission. (*Photo 2*) Water sprinklers were also provided as dust suspension measures. (*Photo 3*)
- (d) To avoid the spoil from dropping into the sea through the gap between the barge and jetting, each barge was closely oriented to the berth and dropping height was minimized. (*Photo 4*). Moreover, erection of tarpaulin on the opposite site of the barge was provided to avoid spoil spurting out (*Photo 5*).
- (e) In regard to the excavated materials delivery by vessel to the Fill Banks, specific vessel chits have been applied by DHK under trip-ticket system (TTS) (*Photo 6*). As advised by DHK, each barge currently deployed is registered with CEDD for delivery of spoils to TM38/TKO137. Transfer of spoil from one barge to another barge in the middle of the sea is not required. In additional, unloading operation onto registered barges are closely supervised by DHK and its Subcontractor's supervisor to avoid such maloperation.

Delivery of Excavated Materials to Mainland China

- 3. On 12 February 2018, supplementary document was provided by RE from EPD regarding suspicion of delivery of excavated materials to the Mainland China. Investigation was carried out based on the documented record by DHK and findings are summarized in below.
 - (a) On 11th November 2017, DHK submitted a proposal to RE to deliver the TBM excavated materials, as 'commodity' which outside the ambit of Waste Disposal Ordinance, to Mainland China (Zhongshan, 中山翠亨新區西二圍) and the materials will be used as backfilling in public project administered by Mainland China Local Government Authority (中山翠新區公共建設局).
 - (b) As part of the proposal, a trial run was carried out on 13th January 2018 under supervision by RE's inspectorate in order to ensure that all operational procedures were satisfactorily demonstrated and relevant statutory requirements were

| | |
|--|---|
| | <p>fulfilled. In the trial run, the materials were transferred from a local derrick barge to a Mainland Chinese self-propelled closed-bottom vessel berthed side by side at the jetty and not in the middle of the sea. The spoils condition were semi-wet, no mitigation measure for dust suppression was considered necessary. The two barges were berthed closely to ensure no material dropping into the sea. (Photo 7 and Figure 1) The work was carefully and closely supervised to ensure no material dropping into the sea and no nuisance caused.</p> <p>4. In our investigation, the operation of the jetty is managed by Tapbo Civil Engineering Company Limit as a transfer station for unloading excavated materials from various sources and it was not a newly constructed barging point for the Project use. The unloaded materials of Contract 2 will be subsequently delivered to the designated disposal ground, TM38 or TKO137. According to the EIA and EM&A programme, the route of waste disposal was not taken into account, therefore, no breaches of EP's conditions and improper disposal were considered involved.</p> <p>5. In our site investigation, the sub-Contractor of DHK has implemented dust mitigation measures and spoils handling procedure for the unloading operation at the jetty. There was no evidence showing the spoil being transferred from barge to barge in the middle of the sea. Nevertheless, DHK was reminded to strictly follow the WMP, trip-ticket system and well maintain the performance of their sub-Contractor in the regard of the dust mitigation measures during spoil unloading procedure.</p> |
|--|---|

Prepared By : Nicola Hon

Designation : Environmental Consultant

Signature :  _____

Date : 6 March 2018



Figure 1 The Complaint Location - Barging Point

Photo Record



Photo 1



Photo 2



Photo 3



Photo 4



Photo 5



Photo 6



Photo 7

To Mr. Vincent Chan **Fax No** By email

Company CRBC-CEC-Kaden JV

cc

From Nicola Hon **Date** 15 March 2018

Our Ref TCS00694/13/300/F1490a **No of Pages** 8 (Incl. cover sheet)

RE Agreement No. CE 45/2008
Liantang/ Heung Yuen Wai Boundary Control Point and Associated Works
Investigation Report for Environmental Complaint of Cleanliness of Lin Ma Hang
Road

If you do not receive all pages, or transmission is illegible, please contact the originator on (852) 2959-6059 to re-send. Should this facsimile be sent to the wrong fax number, would receiver please destroy this copy and notify Action-United Environmental Services & Consulting immediately. Thank you.

Dear all,

Enclosed please find the investigation report for the captioned for your follow up action.

Should you have any queries or need further information, please do not hesitate to contact us or the undersigned at **Tel: 2959-6059 or Fax: 2959-6079**.

Yours Faithfully,
For and on Behalf of
Action-United Environmental Services & Consulting



Nicola Hon
Environmental Consultant

Encl.

| | | | |
|------|-----------------------------------|------|-----------|
| c.c. | Ms. Clara U (EPD) | Fax: | 2685 1133 |
| | Mr. Steve Lo (CE/BCP, NDO, CEDD) | Fax: | 3547 1659 |
| | Mr. Simon Leung (ER of C6, AECOM) | Fax: | 2551 0698 |
| | Mr. Antony Wong (IEC, SMEC) | | By email |

Agreement No. CE 45/2008
Liantang/ Heung Yuen Wai Boundary Control Point and Associated Works
Investigation Report on Environmental Complaint / Enquires

| | |
|-------------------------------------|---|
| Log No. | CE 45/2008 – 73 |
| Received Date by ET | 6 March 2018 |
| Contract under Investigation | Contract 6 |
| Complaint Details | 於打鼓嶺蓮塘口岸工程一帶，由燈柱編號 GD2263 至 GD2365 道路，每天都有大量重型泥頭車及工程車輛出入地盤，進出車輛經常沒有清洗乾淨就出入道口，導致該地方經常佈滿地泥濘或灑水車灑水後到處泥漿，對居民影響甚遠，空氣質數極差，此問題已對居民影響甚久，煩請貴處盡快跟進 |
| Location | Lin Ma Hang (LMH) Road between light post GD2263 and GD2365 |
| Date of Complaint | 4 March 2018 |
| Environmental Aspect | Muddy water and Dust |
| Complainant | undisclosed |
| Complaint Route | Via 1823 |
| Investigation Result | <p>1. A public complaint was received via 1823 on 4 March 2018 regarding the cleanliness of Lin Ma Hang Road and the complaint location is shown in Figure 1. Based on the complaint details, the concerns of the complainant related to the EM&A issues are summarized below:-</p> <p>(a) Large amount of dump trucks running on Lin Ma Hang Road causing dirt and debris accumulated on the road. Road washing by water tanker causing muddy water and slurry and the cleanliness of public road in between lamp posts GD2263 and GD2365 and some construction site exits was unsatisfactory.</p> <p>(b) The air quality of Lin Ma Hang Road was deteriorated by the dirt and debris which affecting the nearby villagers.</p> <p>2. Joint site inspection by RE, IEC, Contractor of C6 (CCKJV) and ET was carried out on 8 March 2017 along the concerned section of LMH Road and construction site exits for complaint investigation. The observations during site inspection are summarized in below.</p> <p>(a) Starting from Ta Kwu Ling Police Station towards Lin Ma Hang, there were 8 unknown site exits found along LMH Road which all not belong to any Contracts of LT/HYW Project. The conditions of these site exits were generally fair and two of them were dusty. It was observed that mud and debris were cumulated on the kerbs and middle of LMH road. The maintenance party/ ownership of these site exits are unknown. (Photos 1 to 8 and Figure 1)</p> <p>(b) There were 3 vehicular site exits under LT/C6, namely “Bridge D”, “Chuk Yuen Road” and “Bridge Y”, along part of the concerned LMH Road. For these three site exits, wheel washing facilities were provided and properly maintained by CCKJV to avoid carrying of dust and soil to public road by site vehicles. The wastewater generated from wheel washing was directed to catchpit/ AquaSed for de-silting. The condition of these site exit and adjoined LMH Road was kept clear of mud and debris. (Photos 9 to 12 and Figure 1)</p> |

Agreement No. CE 45/2008
Liantang/ Heung Yuen Wai Boundary Control Point and Associated Works
Investigation Report on Environmental Complaint / Enquires

| | |
|--|--|
| | <p>(c) There were 3 vehicular site exits to access BCP works area, namely Gate 1, Gate 2 and Gate 3. All three gates area were shared by Contract SS C505 Contractor (Leighton) and LT/C6 Contractor. Gate 1 and Gate 2 are not in use most of the time whereas Gate 3 is the main access currently maintained by SS C505 Contractor. Wheel washing facilities were provided for all Gates exit. It was observed that offloading of sub base was conducted at Gate 1 and some of sub base was dropped on the footpath at the site exit. CCKJV was immediately clear the muddy trails and maintain the cleanliness of the site exit properly. <i>(Photos 13 & 14)</i> Beside, the condition of Gates 2 and 3 were satisfactory which kept clear of mud and debris. <i>(Photos 15 & 16 and Figure 2)</i></p> <p>(d) CCKJV has deployed water tanker continuously running along LMH Road in every normal working day as dust suppression measures. Moreover, road sweeper was also deployed on LMH Road in order to remove debris and gravels on road surface and minimize generation of muddy water during rain. No over-water spraying and slurry was observed after road washing. <i>(Photos 17 to 18)</i> The route of water tanker and road sweeper are fully covered complaint area which shown in <i>Figure 1</i>.</p> <p>3. In addition, monitoring programme was executed under the project to closely monitor the air quality at the air sensitive receivers and immediate action would be undertaken in case of exceedance. Having reviewed the air quality monitoring results in February 2018, no exceedances were triggered at the air quality monitoring locations AM1, AM2 and AM3 which located along Lin Ma Hang Road. It is considered that the dust impact arising from the project was within acceptable level.</p> <p>4. In our investigation, the conditions of all site exits were well maintained without mud and debris. The deficiency observed at Gate 1 was rectified immediately without affecting the public. Water spraying by water tanker on LMH is the major dust mitigation measures to suppress the fugitive dust when vehicle travelling on the road. During our regular inspection, no excessive water spraying and slurry was found on LMH road. Since there were many other heavy vehicles apart from the project using LMH Road and certain number of unknown exit sites without proper management along LMH Road, it is considered that the complaint was not related to the works under the Project.</p> <p>5. Since the site arrangement is subject change all the time, the ET will keep closely inspect the site condition and cleanliness of adjoined roads in subsequent weekly site inspection.</p> |
|--|--|

Prepared By : Nicola Hon
Designation : Environmental Consultant
Signature : 
Date : 15 March 2018

Photo Record



Photo 1 (Unknown Exit 1)

The condition of unknown site exit 1 was fair but some mud and debris were found on the kerbs of LMH road. The maintenance party/ ownership of the site exit is unknown.



Photo 2 (Unknown Exit 2)

The condition of unknown site exit 2 was dusty in which mud and debris were found at site exit and kerbs of LMH road. The maintenance party/ ownership of the site exit is unknown.



Photo 3 (Unknown Exit 3)

The condition of unknown site exit 3 was fair but some mud and debris were found on the kerbs of LMH road. The maintenance party/ ownership of the site exit is unknown.



Photo 4 (Unknown Exit 4)

The condition of unknown site exit 4 was fair but some mud and debris were found on the kerbs and middle of LMH road. The maintenance party/ ownership of the site exit is unknown.



Photo 5 (Unknown Exit 5)

The condition of unknown site exit 5 was fair but some mud and debris were found on the kerbs and middle of LMH road. The maintenance party/ ownership of the site exit is unknown.



Photo 6 (Unknown Exit 6)

The condition of unknown site exit 6 was fair but some mud and debris were found on the kerbs and middle of LMH road. The maintenance party/ ownership of the site exit is unknown.



Photo 7 (Unknown Exit 7)

The condition of unknown site exit 7 was dusty in which mud and debris were found at site exit and kerbs of LMH road. The maintenance party/ownership of the site exit is unknown.



Photo 8 (Unknown Exit 8)

The condition of unknown site exit 8 was fair but some mud and debris were found on the kerbs and middle of LMH road. The maintenance party/ownership of the site exit is unknown.



Photo 9 (Bridge D Site Exit under LT/C6)

Wheel washing facilities were provided for Bridge D site exit and properly maintained by CCKJV. A bund was provided to prevent muddy water from flowing out of the site.



Photo 10 (Bridge D Site Exit under LT/C6)

The condition of Bridge D Site Exit under LT/C6 and adjoined LMH road was satisfactory without mud and debris.



Photo 11 (Chuk Yuen Rd Site exit under LT/C6)

Wheel washing facilities were provided for Chuk Yuen Rd site exit and properly maintained by CCKJV. The condition of Chuk Yuen Rd Site Exit and adjoined LMH road was satisfactory without mud and debris.



Photo 12 (Bridge Y Site Exit under LT/C6)

Wheel washing facilities were provided for Bridge Y site exit and properly maintained by CCKJV. The condition of Bridge Y site exit and adjoined LMH road was satisfactory without mud and debris.



Photo 13 (Gate 1)

Wheel washing facilities were provided for Gate 1 site exit which maintained by CCKJV. It was observed that offloading of sub base was conducted at Gate 1 and some of sub base was dropped on the footpath at the site exit.



Photo 13 (Gate 1)

CCKJV was immediately clear the muddy trails and maintain the cleanliness of the site exit properly.



Photo 15 (Gate 2)

Wheel washing facilities were provided for Gate 2 site exit and properly maintained by CCKJV. The condition of Gate 2 and adjoined LMH road was satisfactory without mud and debris.



Photo 16 (Gate 3)

Wheel washing facilities were provided for Gate 2 site exit and properly maintained by Leighton. The condition of Gate 3 and adjoined LMH road was satisfactory without mud and debris.



Photo 17

During the regular site inspection, it was observed that the road surface of LMH Road was wetted by water bowsers to suppress fugitive dust. No over-water spraying and slurry was observed after road washing.



Photo 18

Road sweeper was also deployed by CCKJV to enhance the road cleaning work in order to remove debris and gravels on road surface.

Agreement No. CE 45/2008
Liantang/ Heung Yuen Wai Boundary Control Point and Associated Work



Figure 1 The site exits along Lin Ma Hang Road

Agreement No. CE 45/2008
Liantang/ Heung Yuen Wai Boundary Control Point and Associated Works



Figure 2 Location Plan for Site exits along Lin Ma Hang Road

Agreement No. CE 45/2008
Liantang/ Heung Yuen Wai Boundary Control Point and Associated Works
Investigation Report on Environmental Complaint / Enquires

| | |
|---|--|
| Log No. | CE 45/2008 – 72 |
| Received Date by ET | 6 March 2018 |
| Related Contract under Investigation | Contract 7 |
| Complaint Details | 於打鼓嶺蓮塘口岸工程一帶，由燈柱編號 GD2263 至 GD2365 道路，每天都有大量重型泥頭車及工程車輛出入地盤，進出車輛經常沒有清洗乾淨就出入道口，導致該地方經常佈滿地泥濘或灑水車灑水後到處泥漿，對居民影響甚遠，空氣質數極差，此問題已對居民影響甚久，煩請貴處盡快跟進 |
| Location | Lin Ma Hang Road (LMH Road) |
| Date of Complaint | 4 March 2018 |
| Environmental Aspect | Muddy water and Dust |
| Complainant | undisclosed |
| Complaint Route | Via 1823 |
| Investigation Result | <p>1. A public complaint was received via 1823 on 4 March 2018 regarding the cleanliness of Lin Ma Hang Road and the complaint location is shown in <i>Figure 1</i>. Based on the complaint details, the concerns of the complainant related to the EM&A issues are summarized below:-</p> <p>(a) Large amount of dump trucks running on Lin Ma Hang Road causing dirt and debris accumulated on the road. Water tanker caused muddy water and slurry while washing on Lin Ma Hang Road. The cleanliness of public road in between lamp posts GD2263 and GD2365 and some construction site exits was unsatisfactory.</p> <p>(b) The air quality of Lin Ma Hang Road was deteriorated by the dirt and debris which affecting the nearby villagers.</p> <p>2. There were 3 works contracts along LMH Road namely, LT/C6 and LT/C7 under CEDD and Contract SS C505 under ASD, and the location plan is shown in <i>Figures 1 & 2</i>. This Investigation Report is prepared for LT/C7 to address the complainant concerns as described in ‘Complaint Details’. According to the photo provided by the complainant, muddy trails were observed at the site exit of Contract 7. (<i>Photo 1</i>) Upon receipt of the complaint, joint site inspection by RE, IEC and ET was carried out on 8th March 2018 and also on 9th March 2018 with Contractor of C7 (KRSJV) for complaint investigation. The observations during site inspection on 8th & 9th March 2018 are summarized in below.</p> <p>(a) There was only one vehicular site exit under Contract 7 to access BCP works area. Wheel washing facilities including water jet were provided at exit site and wheel washing was carried out on a concrete ground before leaving the site. (<i>Photo 2</i>)</p> <p>(b) During investigation conducted by RE, IEC and ET on 8th March 2018, it was observed that the site exit of Contract 7 and the adjoined LMH road near lamp post GD2365 was kept clear of mud and debris. (<i>Photos 3 & 4</i>)</p> |

Agreement No. CE 45/2008
Liantang/ Heung Yuen Wai Boundary Control Point and Associated Works
Investigation Report on Environmental Complaint / Enquires

| | |
|--|--|
| | <p>(c) Subsequent joint site inspection was conducted among RE, IEC, KRSJV and ET on 9th March 2018. It was observed that wheel washing facilities and the related wastewater treatment system were properly maintained. No muddy trails and debris was observed at the site exit and adjoined LMH Road and the cleanliness at the site exit and adjoined LMH road was satisfactory. <i>(Photo 5 & 6)</i></p> <p>3. Furthermore, monitoring programme was executed under the project to closely monitor the air quality at the ASR and immediate action would be undertaken in case of exceedance. Having reviewed the air quality monitoring results in February 2018, no exceedances were triggered at the air quality monitoring location AM1b which located near BCP. It is considered that the dust impact arising from the project was within acceptable level.</p> <p>4. In our investigation, no cumulated muddy water and mud trails were observed at the site exit under Contract 7 and adjoined LMH Road during our inspections. It is considered that deficiency of complaint was a single incident and KRSJV was strongly reminded to maintain the daily operation of the wheel washing facilities and a clear warning sign should be erected at the site exit to remind the vehicle driver to carry out wheel washing before leaving the site.</p> <p>5. Nevertheless, the Contractor should continue fully implement and maintain the wheel washing procedure and dust mitigation measures as recommended in the implementation schedule for environmental mitigation measures in the EM&A Manual.</p> |
|--|--|

Prepared By : Nicola Hon
Designation : Environmental Consultant

Signature : 

Date : 15 March 2018

Photo Record



Photo 1

According to the photo provided by the complainant, muddy trails were observed at the site exit of Contract 7.



Photo 2

There was only one vehicular site exit under Contract 7 to access BCP works area. Wheel washing facilities including water jet were provided at exit site and wheel washing was carried out on a concrete ground before leaving the site.



Photo 3

During investigation conducted on 8th March 2018, it was observed that the site exit of Contract 7 and the adjoining LMH road near lamp post GD2365 was kept clear of mud and debris.



Photo 4

During investigation conducted on 8th March 2018, it was observed that the site exit of Contract 7 and the adjoining LMH road near lamp post GD2365 was kept clear of mud and debris.



Photo 5

During site inspection on 9 March 2018, it was observed that wheel washing facilities and wastewater treatment system were properly maintained.



Photo 6

During site inspection on 9 March 2018, no muddy trails and debris was observed at the site exit and adjoining LMH Road.

Agreement No. CE 45/2008
Liantang/ Heung Yuen Wai Boundary Control Point and Associated Work



Figure 1 The site exits along Lin Ma Hang Road

Agreement No. CE 45/2008
Liantang/ Heung Yuen Wai Boundary Control Point and Associated Works



Figure 2 Location Plan for Site exits along Lin Ma Hang Road



Fax Cover Sheet

To Mr. Jon Kitching **Fax No** 2752 0696
Company Leighton Contractors (Asia) Limited
cc
From Nicola Hon **Date** 28 March 2018
Our Ref TCS00769/15/300/F0257a **No of Pages** 9 **(Incl. cover sheet)**
RE **Architectural Services Department (ArchSD) Contract No: SS C505**
Construction of Liantang/Heung Yuen Wai Boundary Control Point (BCP) – BCP
Buildings and Associated Facilities
Investigation Report for Environmental Complaint of Cleanliness of Lin Ma Hang
Road

If you do not receive all pages, or transmission is illegible, please contact the originator on (852) 2959-6059 to re-send. Should this facsimile be sent to the wrong fax number, would receiver please destroy this copy and notify Action-United Environmental Services & Consulting immediately. Thank you.

Dear all,

Enclosed please find the investigation report for the captioned for your follow up action.

Should you have any queries or need further information, please do not hesitate to contact us or the undersigned at **Tel: 2959-6059 or Fax: 2959-6079**.

Yours Faithfully,
For and on Behalf of
Action-United Environmental Services & Consulting

Nicola Hon
Environmental Consultant

Encl.

| | | | |
|------|-------------------------------|------|-----------|
| c.c. | Ms. Clara U (EPD) | Fax: | 2685 1133 |
| | Mr. William WL Cheng (ASD) | | By e-mail |
| | Mr. Justin Cheung (Ronald Lu) | | By e-mail |
| | Mr. Antony Wong (IEC, SMEC) | | By e-mail |
| | Mr. Simon Leung (ER, AECOM) | Fax: | 2674 7732 |

Architectural Services Department (ArchSD) Contract No: SS C505
Construction of Liantang/Heung Yuen Wai Boundary Control Point (BCP) – BCP Buildings and
Associated Facilities

Investigation Report on Environmental Complaint / Enquires

| | |
|---|---|
| Log No. | SS C505 – 02 |
| Received Date by ET | 6 March 2018 |
| Related Contract under Investigation | Contract SS C505 |
| Complaint Details | 於打鼓嶺蓮塘口岸工程一帶，由燈柱編號 GD2263 至 GD2365 道路，每天都有大量重型泥頭車及工程車輛出入地盤，進出車輛經常沒有清洗乾淨就出入道口，導致該地方經常佈滿地泥濘或灑水車灑水後到處泥漿，對居民影響甚遠，空氣質數極差，此問題已對居民影響甚久，煩請貴處盡快跟進 |
| Location | Lin Ma Hang (LMH) Road between light post GD2263 and GD2365 |
| Date of Complaint | 4 March 2018 |
| Environmental Aspect | Muddy water and Dust |
| Complainant | undisclosed |
| Complaint Route | by 1823 |
| Investigation Result | <ol style="list-style-type: none"> 1. A public complaint was received by 1823 on 4 March 2018 regarding the cleanliness of Lin Ma Hang Road and the complaint location is shown in <i>Figures 1 & 2</i>. Based on the complaint details, the concerns of the complainant related to the EM&A issues are summarized below:- <ol style="list-style-type: none"> (a) Large amount of dump trucks running on Lin Ma Hang Road causing dirt and debris accumulated on the road. Road washing by water tanker causing muddy water and slurry and the cleanliness of public road in between lamp posts GD2263 and GD2365 and some construction site exits was unsatisfactory. (b) The air quality of Lin Ma Hang Road was deteriorated by the dirt and debris which affecting the nearby villagers. 2. There were 3 works contracts along LMH Road namely, LT/C6 and LT/C7 under CEDD and Contract SS C505 under ASD, and the location plan is shown in <i>Figures 1 & 2</i>. This Investigation Report is prepared for Contract SS C505 to address the complainant concerns as described in “Complaint Details”. Upon receipt of the complaint, joint site inspection by RE, IEC and ET was carried out on 8th March 2018 for complaint investigation. The observations during site inspection are summarized in below. <ol style="list-style-type: none"> (a) Starting from Ta Kwu Ling Police Station towards Lin Ma Hang, there were 8 unknown site exits found along LMH Road which all not belong to any Contracts of LT/HYW Project. The conditions of these site exits were generally fair and two of them were dusty. It was observed that mud and debris were cumulated on the kerbs and middle of LMH road. The maintenance party/ ownership of these site exits are unknown. (<i>Photos 1 to 8 and Figure 1</i>) (b) There were 3 vehicular site exits to access BCP works area, namely Gate 1, Gate 2 and Gate 3. All three gates area were shared by Contract SS C505 Contractor (Leighton) and LT/C6 Contractor. |

Architectural Services Department (ArchSD) Contract No: SS C505
Construction of Liantang/Heung Yuen Wai Boundary Control Point (BCP) – BCP Buildings and Associated Facilities

Investigation Report on Environmental Complaint / Enquires

| | |
|--|--|
| | <p>Gate 1 and Gate 2 are not in use most of the time and maintained by LT/C6, whereas Gate 3 is the main access currently maintained by SS C505 Contractor.</p> <p>(c) Wheel washing facilities were provided for all Gates exits. It was observed that LT/C6 Contractor was offloading of sub base at Gate 1 and some of sub base was dropped on the footpath at the site exit. They immediately cleared the muddy trails and maintained the cleanliness of the site exit properly. <i>(Photos 9 & 10)</i> Beside, the condition of Gates 2 and 3 were satisfactory which kept clear of mud and debris. <i>(Photos 11 & 12 and Figure 2)</i></p> <p>(d) Both Contractor of LT/C6 and Contract SS C505 have deployed water tanker continuously running along LMH Road in every normal working day as dust suppression measures. Moreover, LT/C6 has been deployed road sweeper on LMH Road in order to remove debris and gravels on road surface and minimize generation of muddy water during rain. No over-water spraying and slurry was observed after road washing. <i>(Photos 13 to 14)</i> The route of water tanker provided by LT/C6 and Contract SS C505 are shown in <i>Figure 1</i>.</p> <p>3. Monitoring programme was executed under the project to closely monitor the air quality at the ASR and immediate action would be undertaken in case of exceedance. Having reviewed the air quality monitoring results in February 2018, no exceedances were triggered at the air quality monitoring location AM1b which located near BCP. It is considered that the dust impact arising from the project was within acceptable level.</p> <p>4. In our investigation, no cumulated muddy water and mud trails were observed at the site exit under Contract SS C505 and adjoined LMH Road during our inspections. Water spraying by water tanker on LMH is the major dust mitigation measures to suppress the fugitive dust when vehicle travelling on the road. Since there were many other heavy vehicles apart from the project using LMH Road and certain number of unknown exit sites without proper management along LMH Road, it is considered that the complaint was not related to the works under the Project.</p> <p>5. As confirmed by Contract SS C505's construction teams, Gate 1 & 2 are currently totally blocked as there are road and UU works by LT/C6 near those two areas and therefore no more vehicles from Contract SSC505 would pass through Gate 1 or 2. As the site arrangement is subject change all the time, the ET will keep closely inspect the site condition and cleanliness of adjoined roads in subsequent weekly site inspection.</p> |
|--|--|

Architectural Services Department (ArchSD) Contract No: SS C505
Construction of Liantang/Heung Yuen Wai Boundary Control Point (BCP) – BCP Buildings and
Associated Facilities

Investigation Report on Environmental Complaint / Enquires

Prepared By : Nicola Hon
Designation : Environmental Consultant
Signature : 
Date : 28 March 2018

Photo Record



Photo 1 (Unknown Exit 1)

The condition of unknown site exit 1 was fair but some mud and debris were found on the kerbs of LMH road. The maintenance party/ ownership of the site exit is unknown.



Photo 2 (Unknown Exit 2)

The condition of unknown site exit 2 was dusty in which mud and debris were found at site exit and kerbs of LMH road. The maintenance party/ ownership of the site exit is unknown.



Photo 3 (Unknown Exit 3)

The condition of unknown site exit 3 was fair but some mud and debris were found on the kerbs of LMH road. The maintenance party/ ownership of the site exit is unknown.



Photo 4 (Unknown Exit 4)

The condition of unknown site exit 4 was fair but some mud and debris were found on the kerbs and middle of LMH road. The maintenance party/ ownership of the site exit is unknown.



Photo 5 (Unknown Exit 5)

The condition of unknown site exit 5 was fair but some mud and debris were found on the kerbs and middle of LMH road. The maintenance party/ ownership of the site exit is unknown.



Photo 6 (Unknown Exit 6)

The condition of unknown site exit 6 was fair but some mud and debris were found on the kerbs and middle of LMH road. The maintenance party/ ownership of the site exit is unknown.



Photo 7 (Unknown Exit 7)

The condition of unknown site exit 7 was dusty in which mud and debris were found at site exit and kerbs of LMH road. The maintenance party/ownership of the site exit is unknown.



Photo 8 (Unknown Exit 8)

The condition of unknown site exit 8 was fair but some mud and debris were found on the kerbs and middle of LMH road. The maintenance party/ownership of the site exit is unknown.



Photo 9 (Gate 1)

Wheel washing facilities were provided for Gate 1 site exit which maintained by CCKJV. It was observed that offloading of sub base was conducted at Gate 1 and some of sub base was dropped on the footpath at the site exit.



Photo 10 (Gate 1)

CCKJV was immediately clear the muddy trails and maintain the cleanliness of the site exit properly.



Photo 11 (Gate 2)

Wheel washing facilities were provided for Gate 2 site exit and properly maintained by CCKJV. The condition of Gate 2 and adjoined LMH road was satisfactory without mud and debris.



Photo 12 (Gate 3)

Wheel washing facilities were provided for Gate 2 site exit and properly maintained by Leighton. The condition of Gate 3 and adjoined LMH road was satisfactory without mud and debris.



Photo 13

During the regular site inspection, it was observed that the road surface of LMH Road was wetted by water bowsers to suppress fugitive dust. No over-water spraying and slurry was observed after road washing.



Photo 14

Road sweeper was also deployed to enhance the road cleaning work in order to remove debris and gravels on road surface.



Figure 1 The site exits along Lin Ma Hang Road



Figure 2 Location Plan for Site exits along Lin Ma Hang Road

To Mr. Vincent Chan
Mr. Roger Lee (DHK) **Fax No** By email

Company CRBC-CEC-Kaden JV
Dragages Hong Kong Limited

cc

From Nicola Hon **Date** 19 March 2018

Our Ref TCS00694/13/300/F1492a **No of Pages** 7 **(Incl. cover sheet)**

RE Agreement No. CE 45/2008
Liantang/ Heung Yuen Wai Boundary Control Point and Associated Works
Investigation Report for Environmental Complaint of Cleanliness of Sha Tau Kok
Road – Ma Mei Ha Section

If you do not receive all pages, or transmission is illegible, please contact the originator on (852) 2959-6059 to re-send. Should this facsimile be sent to the wrong fax number, would receiver please destroy this copy and notify Action-United Environmental Services & Consulting immediately. Thank you.

Dear all,

Enclosed please find the investigation report for the captioned for your follow up action.

Should you have any queries or need further information, please do not hesitate to contact us or the undersigned at **Tel: 2959-6059 or Fax: 2959-6079**.

Yours Faithfully,
For and on Behalf of
Action-United Environmental Services & Consulting



Nicola Hon
Environmental Consultant

Encl.

| | | | |
|------|---------------------------------------|----------|-----------|
| c.c. | Ms. Clara U (EPD) | Fax: | 2685 1133 |
| | Mr. Raymond Leong (CE/BCP, NDO, CEDD) | Fax: | 3547 1659 |
| | Mr. Steve Lo (CE/BCP, NDO, CEDD/C6) | Fax: | 3547 1659 |
| | Mr. Edwin Ching (ER of C2, AECOM) | Fax: | 2171 3498 |
| | Mr. Simon Leung (ER of C6, AECOM) | Fax: | 2551 0698 |
| | Mr. Antony Wong (IEC, SMEC) | By email | |

Agreement No. CE 45/2008
Liantang/ Heung Yuen Wai Boundary Control Point and Associated Works
Investigation Report on Environmental Complaint / Enquires

| | |
|---|---|
| Log No. | CE 45/2008 – 74 |
| Received Date by ET | 6 March 2018 |
| Related Contract under Investigation | Contract 2 and Contract 6 |
| Complaint Details | 投訴人致電工程熱線反映，沙頭角公路馬尾下段沿路航髒及大塵，地盤出口濕滑及滿佈泥水，水馬亦不清潔。” |
| Location | Sha Tau Kok (STK) Road – Ma Mei Ha Section |
| Date of Complaint | 28 February 2018 |
| Environmental Aspect | Muddy water |
| Complainant | unknown |
| Complaint Route | Via Project Hotline |
| Investigation Result | <p>1. A public complaint was received from Project Hotline on 28 February 2018 regarding the cleanliness of Sha Tau Kok (STK) Road – Ma Mei Ha Section as described in “Complaint Details”. The complaint location Sha Tau Kok Road - Ma Mei Ha Section and location plan of the related project site are shown in <i>Figure 1</i>.</p> <p>2. Joint site inspection was carried out by RE, IEC, Contractors and ET on 8th March 2018 on STK Road and related construction site exit under Contract 2 (LT/C2) and Contract 6 (LT/C6) for complaint investigation. The investigation was focusing on the environmental concerns about dust and wastewater issue and the cleanliness of the water filled road barrier was out of the scope of EM&A programme. The observations during the site inspection are summarized in below.</p> <p>(a) There was a temporary road side work area under LT/C6 located at Tai Tong Wu adjoined to STK Road for underground utility investigation work. (<i>Photo 1</i>) There was no exportation of spoil involved in that works area and manual sweeping would be deployed to maintain the cleanliness of the temporary work area. During the inspection, it was observed that the condition of STK was not dusty and no muddy water/ slurry was found near the works area. (<i>Photo 2</i>) However, road debris was observed at both middle and edges of the STK road which suspected to be caused by frequent use of dump truck transporting loose material to NENT and the majority of dump truck was not belong to LT/HYW project. (<i>Photo 3</i>)</p> <p>(b) The vehicle site exit of North Portal Site Area (LT/C2) was located on STK Road. Wheel washing facilities was provided within the construction site and site vehicle was cleaned prior leaving the site. (<i>Photo 4</i>) Cut-off drain was in place at the site exit to intercept site runoff from flowing to STK road. No muddy water/ slurry was found at the site exit after the wheel washing facilities. However, mud and debris was observed at both middle and edges of the exiting STK road which suspected to be caused by frequent use of dump truck transporting loose material to NENT and the majority of dump truck was not belong to LT/HYW project. (<i>Photo 5</i>)</p> |

Agreement No. CE 45/2008
Liantang/ Heung Yuen Wai Boundary Control Point and Associated Works
Investigation Report on Environmental Complaint / Enquires

| | |
|--|---|
| | <p>(c) Another vehicle site exit for LT/C2 was Admin Building which located on Wo Keng Shan (WKS) Road. Wheel washing facilities was provided at the concrete ground within the construction site. (Photo 6) The wastewater from wheel washing was collected by a pit and pumped to wastewater treatment facility. No muddy water/slurry was found at the site exit after the wheel washing facilities. (Photo 7) Moreover, no muddy trails and dust and soil carrying by site vehicles to public road were observed outside the site exit. (Photo 8)</p> <p>(d) There was no site exit belong to LT/C6 on STK Road and the main vehicle site exit for works area of Contract 6 was located on Wo Keng Shan (WKS) Road. Wheel washing facilities was provided concrete ground within the construction site and no muddy water/slurry was found at the site exit after the wheel washing facilities. (Photos 9 & 10) No muddy trails and dust and soil carrying by site vehicles to public road were observed outside the site exit. (Photo 11)</p> <p>(e) Road washing/ cleaning by water tanker was provided along Wo Keng Shan Road to Sha Tau Kok Road as dust suppression measures. The condition of STK Road after road washing was in normal condition without excessive water/ slurry on road surface. (Photo 12) As advised by both Contractors, road washing was carried out in every normal working day (Mon-Sat), except for rainy day. Moreover, road sweeping has been deployed on the concerned roads twice a week to maintain cleanliness of the roads.</p> <p>3. In addition, monitoring programme was executed under the project to closely monitor the air quality at the air sensitive receivers and immediate action would be undertaken in case of exceedance. Having reviewed the air quality monitoring results in the recent months on January and February 2018, no exceedances were triggered at the air quality monitoring location AM7b which located outside North Portal Site of Contract 2 and adjacent to the concern STK Road. It is considered that the dust impact arising from the project was within acceptable level.</p> <p>4. In our investigation, the Contractors have been well maintained the wheel washing facilities and no dust and soil carrying by site vehicles to STK road were observed. Having inspected the existing condition of STK Road and WKS Road which far from the construction site, soil and debris were also found at the middle and edges of the road which suspected to be caused by frequent use of dump truck transporting loose material to NENT and the majority of dump truck was not belong to LT/HYW project. Therefore, it is considered that the complaint was not valid to the project. In particular dry season, ET will closely monitor the implementation of dust mitigation measures in the subsequent site inspections.</p> |
|--|---|

Agreement No. CE 45/2008
Liantang/ Heung Yuen Wai Boundary Control Point and Associated Works
Investigation Report on Environmental Complaint / Enquires

Prepared By : Nicola Hon
Designation : Environmental Consultant
Signature : 
Date : 19 March 2018

Photo Record



Photo 1

There was a temporary road side work area under LT/C6 located at Tai Tong Wu adjoined to STK Road for underground utility investigation work.



Photo 2

It was observed that the condition of STK Road was not dusty and no muddy water/ slurry was found near the works area.



Photo 3

Road debris was observed at both middle and edges of the STK road which suspected to be caused by frequent use of vehicle.



Photo 4 (North Portal under C2)

The vehicle site exit of North Portal Site Area (LT/C2) was located on STK Road. Wheel washing was provided within the construction site to ensure all site vehicles were washed prior leaving the site.



Photo 5 (North Portal under C2)

No muddy water/ slurry was found at the site exit after the wheel washing facilities. However, mud and debris was observed at both middle and edges of the STK road which suspected to be caused by frequent use of vehicle.



Photo 6 (Admin Building under C2)

Another vehicle site exit for LT/C2 was Admin Building which located on Wo Keng Shan (WKS) Road. Wheel washing facilities was provided at the concrete ground within the construction site.



Photo 7 (Admin Building under C2)
No muddy water/ slurry was found at the site exit after the wheel washing facilities.



Photo 8 (Admin Building under C2)
No muddy trails and dust and soil carrying by site vehicles to public road were observed outside the site exit.



Photo 9 (South Portal under C6)
Wheel washing facilities was provided concrete ground within the construction site.



Photo 10 (South Portal under C6)
No muddy water/ slurry was found at the site exit after the wheel washing facilities.



Photo 11 (South Portal under C6)
The overall view of the Wo Keng Shan Road from the site exit for both South Portal and no muddy trails and dust and soil carrying by site vehicles to public road were observed.



Photo 12
Road washing/ cleaning by water tanker was provided along Wo Keng Shan Road to Sha Tau Kok Road as dust suppression measures. The condition of STK Road after road washing was in normal condition without excessive water/ slurry on road surface.

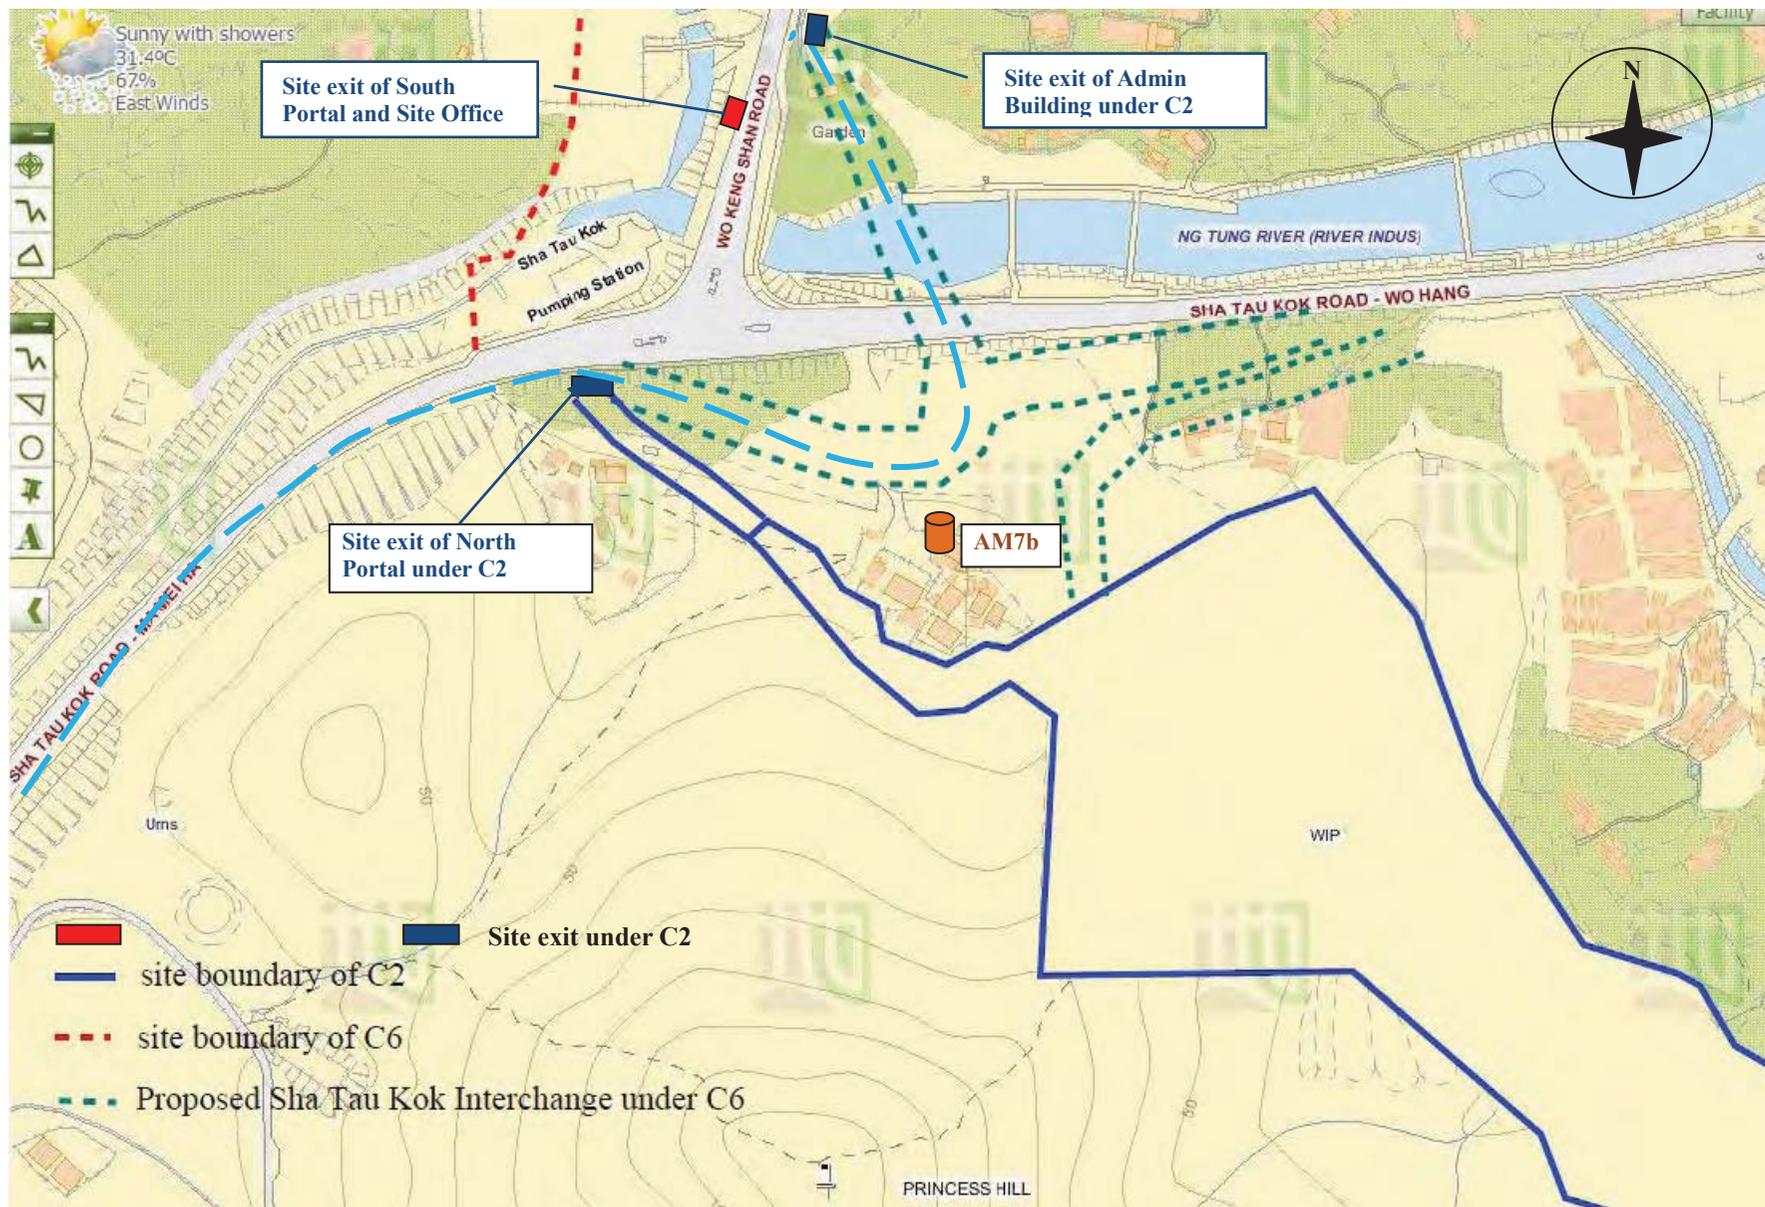


Figure1: Complaint Location and the work area of Contract 2 and Contract 6